


G



External grooving		G2
GBA	KGBA / KGBAS / KGBA-JCT	G13
	KGB / KGBS	G16
GBF	KGBF-F / KGBF-JCTM / KGBFS	G23
	S-KGBF	G26
KGD	KGD (Integral type)	G34
	KGD (Integral type for automatic lathe)	G35
	KGD-JCT (Integral type, coolant-through holder)	G36
	KGD-JCTM (Integral type for automatic lathe, coolant-through holder)	G39
	KGD-S (0° separate type)	G40
KGM	KGM / KGM-T / KGMM / KGMS	G55
	KGMU	G60
KGH	KGH / KGHS	G62
KGA	KGA	G64
KGMW	KGMW	G67
Internal grooving		G68
EZG	EZG	G70
VNG	VNG	G72
GC	SIGC	G76
GE/GER	SIGE	G81
GIV	GIV / GIV-E / GIV-W	G86
KIGBA	KIGBA	G89
KGDI	KGDI	G91
KGH	KIGH	G93
KGM	KIGM-8 / KIGMU-8	G95
KGIA	KGIA	G97
Face grooving		G98
EZFG	EZFG	G102
VNFG	VNFG	G104
TWFG / TWFGT	TWFG	G106
	TWFGT	G108
KGDF	KGDF	G114
	KGDF-Z (Integral type)	G118
GVF-AA	GFVS-AA / GFVT-AA	G125
	GFV	G127
	GFVS / GFVT	G129
	GIFV	G133
KFMS	KFMS	G135
KFMS-8	KFMS-8	G138
KFTB	KFTB-S	G140
Recommended cutting conditions		G141

KGD Grooving (External grooving & turning)

Integral type

Type	KGD
Edge width (mm)	2.0 ~ 8.0
Max. grooving depth (mm)	6 ~ 30
See Page	G34

Integral type (Coolant-through holders)



Type	KGD-JCT
Edge width (mm)	3.0 ~ 5.0
Max. grooving depth (mm)	6 ~ 25
See Page	G36

Integral type for automatic lathe

Type	KGD
Edge width (mm)	2.0 ~ 4.0
Max. grooving depth (mm)	10 ~ 25.5
See Page	G35

Integral type for automatic lathe (Coolant-through holders)

Type	KGD-JCTM
Edge width (mm)	2.0 ~ 4.0
Max. grooving depth (mm)	12 ~ 16
See Page	G39

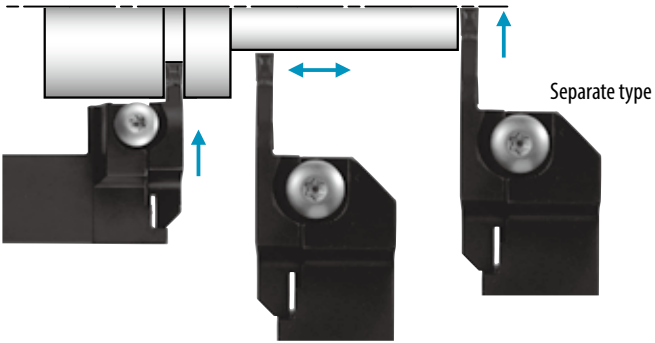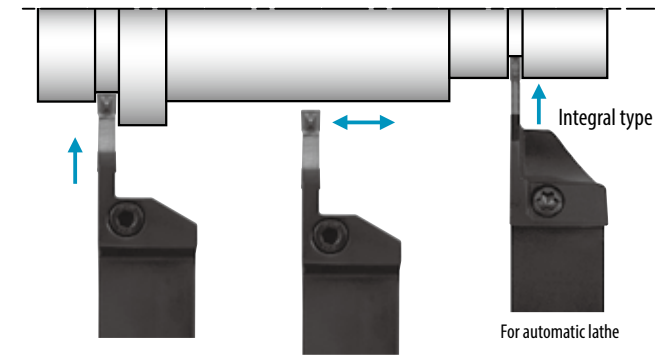

Separate type

Type	* KGD-S
Edge width (mm)	3.0
Max. grooving depth (mm)	10
See Page	G41


* The separate type toolholders can accept all the blades if their hand is matching.

Separate type

Type	* KGD-S
Edge width (mm)	2.0 ~ 5.0
Max. grooving depth (mm)	10 ~ 25
See Page	G40

* The separate type toolholders can accept all the blades if their hand is matching.

Low cutting force
GS



Low feed
GL



General purpose
GM



High feed
PH




Copying
CM




Non-ferrous Metals
AM



Shallow grooving (Grooving depth: ~5 mm)

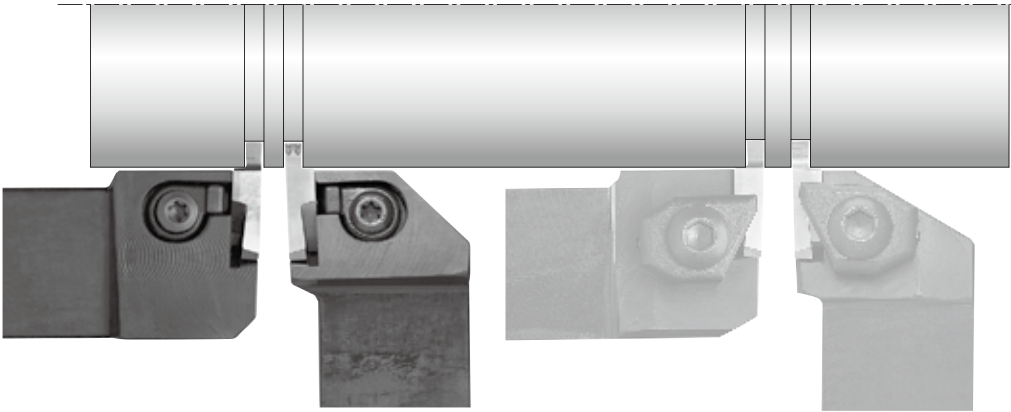

Type	KGBAS	KGBA (-JCT)	KGBS	KGB
Edge width (mm)	0.33 ~ 4.8	0.33 ~ 4.8	0.33 ~ 4.8	0.33 ~ 4.8
Max. grooving depth (mm)	0.8 ~ 5.0	0.8 ~ 5.0	0.8 ~ 5.0	0.8 ~ 5.0
See Page	G14	G13,G15	G17	G16

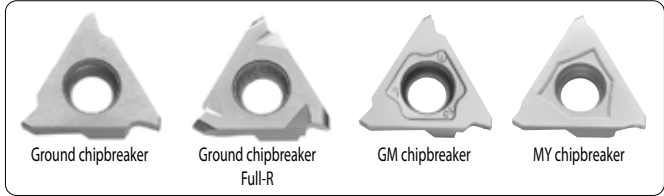


Edge shape	General (Square)	Full-R (Round)	GM chipbreaker	MY chipbreaker


* These shallow groove types of the previous system will be switched to the system on the left.

KGBS → KGBAS
KGB → KGBA

Deep grooving (Grooving depth : ~25 mm)

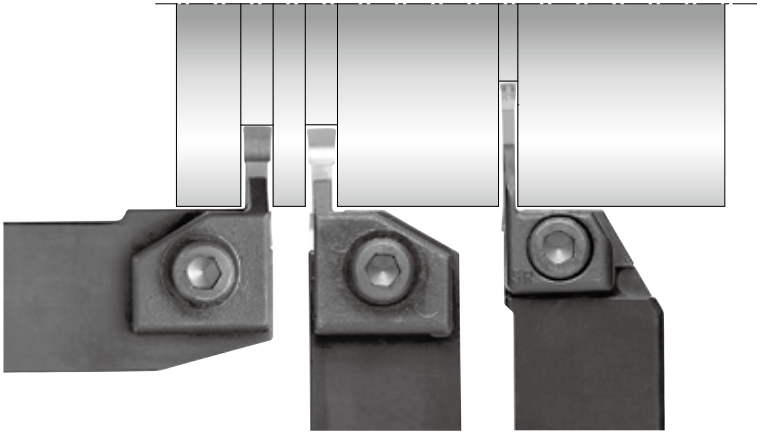


Type	KGHS	KGH	KGA
Edge Width (mm)	4.0 ~ 8.0	4.0 ~ 12.0	3.0 ~ 5.0
Max. grooving depth (mm)	13	13 ~ 17	20 ~ 25
See Page	G63	G62	G64

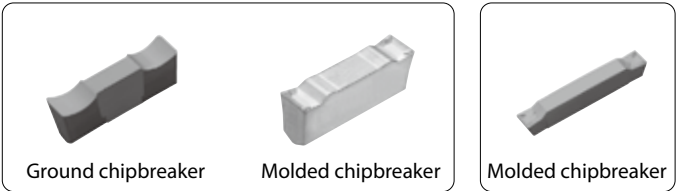

KGM Grooving (External grooving & turning)

Type	KGMM
Edge width (mm)	3.0 ~ 5.0
Max. grooving depth (mm)	4.8
See Page	G58

KGMS
3.0 ~ 5.0
4.8
G58

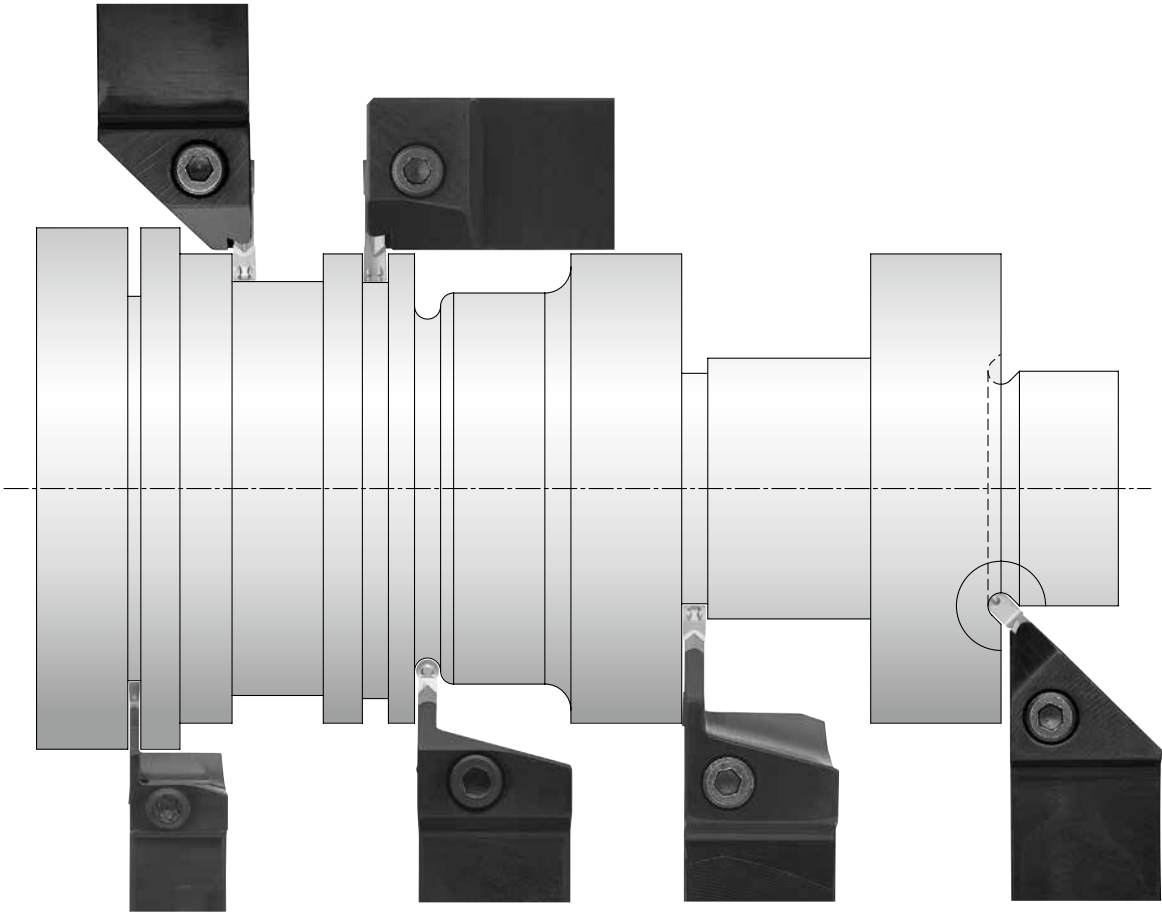


Type	KGM
Edge width (mm)	1.5 ~ 4.0
Max. grooving depth (mm)	10 ~ 16
See Page	G55

KGM
3.0 ~ 8.0
9 ~ 25
G56

KGM-T
2.0 ~ 6.0
17 ~ 30
G57

KG MU
3.0 ~ 5.0
3.5 ~ 4.5
G60

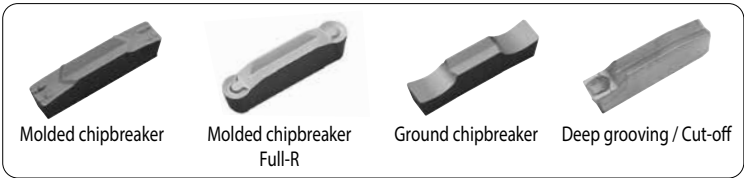


External grooving of precision parts for automatic lathe

Coolant-through holders

Type	KGD
Edge width (mm)	2.0 ~ 4.0
Max. grooving depth (mm)	10 ~ 25.5
See Page	G35

Type	KGD-JCTM
Edge width (mm)	2.0 ~ 4.0
Max. grooving depth (mm)	12 ~ 16
See Page	G39

Type	KGM
Edge width (mm)	1.5 ~ 4.0
Max. grooving depth (mm)	10 ~ 16
See Page	G55

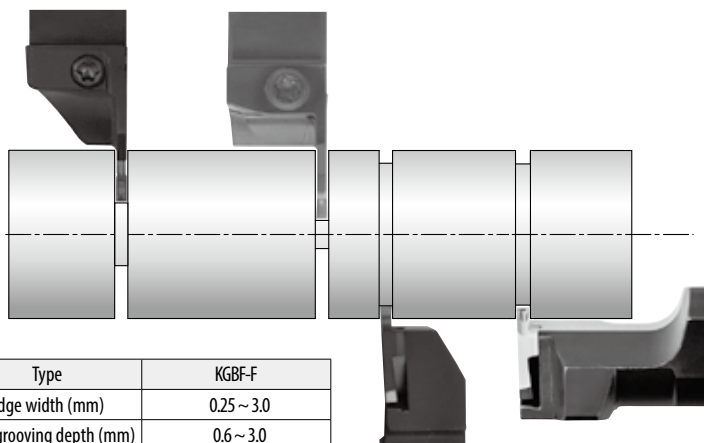


Molded chipbreaker

Ground chipbreaker

Type	KGBF-F
Edge width (mm)	0.25 ~ 3.0
Max. grooving depth (mm)	0.6 ~ 3.0
See Page	G23

Coolant-through holders

Type	KGBFS	KGBF-JCTM	S-KGBF
Edge width (mm)	0.25 ~ 3.0	0.25 ~ 3.0	0.25 ~ 3.0
Max. grooving depth (mm)	0.6 ~ 3.0	0.6 ~ 3.0	0.6 ~ 3.0
See Page	G25	G24	G26

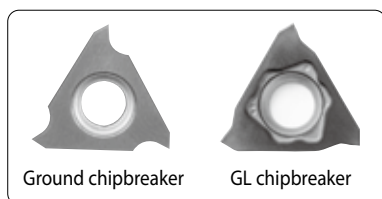


Ground chipbreaker

GL chipbreaker

For aluminum wheel external grooving

(External / Facing / Copying)




Type	KGMW
Edge width (mm)	6.0 ~ 8.0
Max. grooving depth (mm)	25
See Page	G67



1-edge
PCD



GBA32







			Carbon steel / Alloy steel										○	○	●	●		●		P			
			Stainless steel										○	○	●	●				M			
			Cast iron										☺		●			☺		K			
			Non-ferrous metals															●		N			
			Titanium alloy															●		S			
			Hard materials (~ 40HRC)																	H			
			Hard materials (40HRC ~)																				
Insert	Description	No. of edges	Dimension (mm)						Tolerance (mm)		Carbide							Cer- met	Applicable toolholder ☞ G13~G17 G89				
			CW	CDX	IC	S	D1	RE	CW min.	CW max.	PVD					-	PVD	-					
											PR1215	PR1625	PR2015	PR2025	PR905	PR930	KW10	PV7040		TN90			
		3	GBA32R 033-005	0.33	0.8				0.05	-0.03	+0.02	○	○	●	●								KGBAR...16 KGBAR...16JCT KGBASL...16 KIGBAL...16
			050-005	0.5	1.2				0.05	0	+0.05	○	○	●	●						●	●	
			075-005	0.75	2				0.05	-0.025	+0.025	○	○	●	●						●	●	
			095-005	0.95	2				0.05	-0.025	+0.025	○	○	●	●						●	●	
			100-005	1	2				0.05	-0.025	+0.025	○	○	●	●						●	●	
			110-005	1.1	2				0.05	-0.025	+0.025	○	○	●	●								
			120-005	1.2	2				0.05	-0.025	+0.025	○	○	●	●								
			125-020	1.25	2				0.2	-0.025	+0.025	○	○	●	●						●	●	
			130-020	1.3	2				0.2	-0.025	+0.025	○	○	●	●								
			140-020	1.4	2.5				0.2	-0.025	+0.025	○	○	●	●								
			145-020	1.45	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			150-020	1.5	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			160-020	1.6	2.5				0.2	-0.025	+0.025	○	○	●	●								
			170-020	1.7	2.5				0.2	-0.025	+0.025	○	○	●	●								
			175-020	1.75	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			200-020	2	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			225-020	2.25	2.5				0.2	-0.025	+0.025	○	○	●	●								
			250-020	2.5	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			300-020	3	2.5				0.2	-0.025	+0.025	○	○	●	●								
			GBA32L 033-005	0.33	0.8	9.525	3.18	4.4	0.05	-0.03	+0.02	○	○	●	●						●	●	KGBAL...16 KGBAL...16JCT KGBASR...16 KIGBAR...16
			050-005	0.5	1.2				0.05	0	+0.05	○	○	●	●								
			075-005	0.75	2				0.05	-0.025	+0.025	○	○	●	●								
			095-005	0.95	2				0.05	-0.025	+0.025	○	○	●	●								
			100-005	1	2				0.05	-0.025	+0.025	○	○	●	●								
			110-005	1.1	2				0.05	-0.025	+0.025	○	○	●	●								
			120-005	1.2	2				0.05	-0.025	+0.025	○	○	●	●								
			125-020	1.25	2				0.2	-0.025	+0.025	○	○	●	●								
			130-020	1.3	2				0.2	-0.025	+0.025	○	○	●	●								
			140-020	1.4	2.5				0.2	-0.025	+0.025	○	○	●	●								
			145-020	1.45	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			150-020	1.5	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			160-020	1.6	2.5				0.2	-0.025	+0.025	○	○	●	●								
			170-020	1.7	2.5				0.2	-0.025	+0.025	○	○	●	●								
			175-020	1.75	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			200-020	2	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			225-020	2.25	2.5				0.2	-0.025	+0.025	○	○	●	●								
			250-020	2.5	2.5				0.2	-0.025	+0.025	○	○	●	●						●	●	
			300-020	3	2.5				0.2	-0.025	+0.025	○	○	●	●								

Right-hand shown
CDX shows available grooving depth.

Recommended cutting conditions ➡ G141

● : Standard item ○ : Will be replaced with a new product □ : Expected to be discontinued in September 2026

GBA32

																P	
																M	
																K	
																N	
																S	
																H	
Insert	Description	No. of edges	Dimension (mm)						Tolerance (mm)		Carbide		Cermet	PCD	Applicable toolholder G13~G17 G89		
			CW	CDX	IC	S	D1	RE	LE	CW min.	CW max.	PVD				- KPD001 KPD010	
												PR1215	PR1625	PR2015			
	 Sharp edge	3	0.5	1				0.05		0	+0.05					●	KGBAR...16 KGBAR...16JCT KGBASL...16 KIGBAL...16
			0.75	2				0.05		-0.025	+0.025					●	
			0.95	2				0.05		-0.025	+0.025					●	
			1	2				0.05		-0.025	+0.025					●	
			1.25	2				0.2		-0.025	+0.025					●	
			1.45	2				0.2		-0.025	+0.025					●	
			1.5	2				0.2		-0.025	+0.025					●	
			1.75	2				0.2		-0.025	+0.025					●	
			2	2.5				0.2		-0.025	+0.025					●	
			2.5	2.5				0.2		-0.025	+0.025					●	
	GBA32L		0.5	1	9.525	3.18	4.4	0.05	-	0	+0.05					●	KGBAL...16 KGBAL...16JCT KGBASL...16 KIGBAR...16
			0.75	2				0.05		-0.025	+0.025					●	
			0.95	2				0.05		-0.025	+0.025					●	
			1	2				0.05		-0.025	+0.025					●	
			1.25	2				0.2		-0.025	+0.025					●	
			1.45	2				0.2		-0.025	+0.025					●	
			1.5	2				0.2		-0.025	+0.025					●	
			1.75	2				0.2		-0.025	+0.025					●	
	 Full R	3	2	3	2.5	9.525	3.18	4.4	1 1.5	-0.025	+0.025						KGBAR...16 KGBAR...16JCT KGBASL...16 KIGBAL...16
	 1-edge	1	1.25	2												●	KGBAR...16 KGBAR...16JCT KGBASL...16 KIGBAL...16
			1.5	2	9.525	3.18	4.4	0.1	1.7	-0.03	+0.03					●	
			2	2.5												●	

Right-hand shown
CDX shows available grooving depth.

Recommended cutting conditions  G141

● : Standard item ○ : Will be replaced with a new product


CBN & PCD Inserts are
sold in 1 piece boxes

G



Grooving

GBA43

		Carbon steel / Alloy steel																				P	
		Stainless steel																				M	
		Cast iron																				K	
		Non-ferrous metals																				N	
		Titanium alloy																				S	
		Hard materials (~ 40HRC)																				H	
Hard materials (40HRC ~)																							
Insert	Description	No. of edges	Dimension (mm)					Tolerance (mm)		Carbide					Cermet		Applicable toolholder G13~G17 G89						
			CW	CDX	IC	S	D1	RE	CW min.	CW max.	PVD					-		PVD	-				
											PR1215	PR1625	PR2015	PR2025	PR905	PR930		KW10	PV7040	TC40N	TN90		
 	GBA43R 125-010		1.25	2		4.76		0.1			○	○	●	●						KGBAR...22-15 KGBAR...22-15JCT KGBASL...22-15 KIGBAL...22			
	125-020		1.25	2		4.76		0.2			○	○	●	●			●	●	●				
	140-020		1.4	3.5		4.76		0.2			○	○	●	●			●	●	●				
	145-020		1.45	2		4.76		0.2			○	○	●	●			●	●	●				
	150-010		1.5	3.5		4.76		0.1			○	○	●	●			●	●	●				
	150-020		1.5	3.5		4.76		0.2			○	○	●	●			●	●	●				
	170-020		1.7	3.5		4.76		0.2			○	○	●	●			●	●	●				
	175-020		1.75	3.5		4.76		0.2			○	○	●	●			●	●	●				
	185-020		1.85	3.5		4.76		0.2			○	○	●	●			●	●	●				
	195-020		1.95	3.5		4.76		0.2			○	○	●	●			●	●	●				
	200-010		2	3.5		4.76		0.1			○	○	●	●			●	●	●				
	200-020		2	3.5		4.76		0.2			○	○	●	●			●	●	●				
	225-020		2.25	3.5		4.76		0.2			○	○	●	●			●	●	●				
	230-020		2.3	3.5		4.76		0.2			○	○	●	●			●	●	●				
	250-010		2.5	5		4.76		0.1			○	○	●	●			●	●	●				
	250-030	3	2.5	5	12.7	4.76	5.5	0.3	- 0.025	+ 0.025	○	○	●	●			●	●	●				
	265-030		2.65	4		4.76		0.3			○	○	●	●			●	●	●				
			5								○	○	●	●			●	●	●				
	280-030		2.8	4		4.76		0.3			○	○	●	●			●	●	●				
			5								○	○	●	●			●	●	●				
	300-010		3	5		4.76		0.1			○	○	●	●			●	●	●				
	300-030		3	4		4.76		0.3			○	○	●	●			●	●	●				
			5								○	○	●	●			●	●	●				
	325-030		3.25	5		4.76		0.3			○	○	●	●			●	●	●				
	330-030		3.3	4		4.76		0.3			○	○	●	●			●	●	●				
			5								○	○	●	●			●	●	●				
	350-010		3.5	5		4.76		0.1			○	○	●	●			●	●	●	KGBAR...22-35 KGBAR...22-35JCT KGBASL...22-35 KIGBAL...22			
	350-030		3.5	5		4.76		0.3			○	○	●	●			●	●	●				
	400-010		4	5		4.76		0.1			○	○	●	●			●	●	●				
	400-040		4	5		4.76		0.4			○	○	●	●			●	●	●				
	430-040		4.3	5		4.76		0.4			○	○	●	●			●	●	●				
	450-040		4.5	5		4.76		0.4			○	○	●	●			●	●	●				
	480-040		4.8	5		5		0.4			○	○	●	●			●	●	●				

Right-hand shown

CDX shows available grooving depth.


*1 : KGBAR...22-25T5, KGBAR...22-25JCT, KGBASL...22-25T5, KIGBAL...22

*2 : KGBAR...22-25, KGBAR...22-25T5, KGBAR...22-25JCT, KGBASL...22-25, KGBASL...22-25T5, KIGBAL...22

Recommended cutting conditions  G141

● : Standard item ○ : Will be replaced with a new product □ : Expected to be discontinued in September 2026

GBA43

		Carbon steel / Alloy steel																				P	
		Stainless steel																				M	
		Cast iron																				K	
		Non-ferrous metals																				N	
		Titanium alloy																				S	
		Hard materials (~ 40HRC)																				H	
		Hard materials (40HRC ~)																					
Insert	Description	No. of edges	Dimension (mm)						Tolerance (mm)		Carbide					Cermet			Applicable toolholder ➡ G13~G17 G89				
			CW	CDX	IC	S	D1	RE	CW min.	CW max.	PVD					-	PVD	-					
											PR1215	PR1625	PR2015	PR2025	PR905	PR930	KW10	PV7040		TC40N	TN90		
	GBA43L	125-010	1.25	2		4.76		0.1			○	○	●	●								KGBAL...22-15 KGBAL...22-15JCT KGBASR...22-15 KIGBAR...22	
		125-020	1.25	2		4.76		0.2			○	○	●	●									
		140-020	1.4	3.5		4.76		0.2			○	○	●	●									
		145-020	1.45	2		4.76		0.2			○	○	●	●									
				3.5																			
		150-010	1.5	3.5		4.76		0.1			○	○	●	●									
		150-020	1.5	3.5		4.76		0.2			○	○	●	●									
		170-020	1.7	3.5		4.76		0.2			○	○	●	●									
		175-020	1.75	3.5		4.76		0.2			○	○	●	●									
		185-020	1.85	3.5		4.76		0.2			○	○	●	●									
		195-020	1.95	3.5		4.76		0.2			○	○	●	●									
		200-010	2	3.5		4.76		0.1			○	○	●	●									
		200-020	2	3.5		4.76		0.2			○	○	●	●									
		225-020	2.25	3.5		4.76		0.2			○	○	●	●									
		230-020	2.3	3.5		4.76		0.2			○	○	●	●									
		250-010	2.5	5		4.76		0.1			○	○	●	●								*3	
		250-030	3	2.5	4	12.7	4.76	5.5	0.3	-0.025	+0.025	○	○	●	●							*4	
				5								○	○	●	●							*3	
		265-030	2.65	4		4.76		0.3			○	○	●	●								*4	
				5																		*3	
		280-030	2.8	4		4.76		0.3			○	○	●	●								*4	
				5																		*3	
		300-010	3	5		4.76		0.1			○	○	●	●								*3	
		300-030	3	4		4.76		0.3			○	○	●	●								*4	
				5																		*3	
		330-030	3.3	4		4.76		0.3			○	○	●	●								*4	
				5																		*3	
		350-010	3.5	5		4.76		0.1			○	○	●	●								KGBAL...22-35 KGBAL...22-35JCT KGBASR...22-35 KIGBAR...22	
		350-030	3.5	5		4.76		0.3			○	○	●	●									
		400-010	4	5		4.76		0.1			○	○	●	●									
		400-040	4	5		4.76		0.4			○	○	●	●									
		430-040	4.3	5		4.76		0.4			○	○	●	●									
		450-040	4.5	5		4.76		0.4			○	○	●	●									
		480-040	4.8	5		5		0.4			○	○	●	●									

Right-hand shown


CDX shows available grooving depth.

*3 : KGBAL...22-25T5, KGBAL...22-25JCT, KGBASR...22-25T5, KIGBAR...22

*4 : KGBAL...22-25, KGBAL...22-25T5, KGBAL...22-25JCT, KGBASR...22-25, KGBASR...22-25T5, KIGBAR...22

Recommended cutting conditions  G141

GBA43

			Carbon steel / Alloy steel										Cement	Applicable toolholder ➔ G13~G17 G89	
			Stainless steel												
			Cast iron												
			Non-ferrous metals												
			Titanium alloy												
			Hard materials (~ 40HRC)												
			Hard materials (40HRC ~)												
Insert	Description	No. of edges	Dimension (mm)						Tolerance (mm)		TNG20				
			CW	CDX	IC	S	D1	RE	LE	CW min.		CW max.			
 	GBA43R	125-020F	1.25	2		4.76		0.2					●	KGBAR...22-15 KGBAR...22-15JCT KGBASL...22-15 KIGBAL...22	
		145-020F	1.45	2		4.76		0.2					●		
		150-020F	1.5	3.5		4.76		0.2					●		
		175-020F	1.75	3.5		4.76		0.2					●		
		185-020F	1.85	3.5		4.76		0.2					●		
		200-020F	2	3.5		4.76		0.2					●		
		230-020F	2.3	3.5		4.76		0.2					●		
		250-030F	2.5	4		4.76		0.3					●	*2	
		265-030F	2.65	4		4.76		0.3					●		
		280-030F	2.8	4		4.76		0.3					●		
		300-030F	3	4		4.76		0.3					●		
		330-030F	3.3	4		4.76		0.3					●		
		350-030F	3.5	5		4.76		0.3					●	KGBAR...22-35 KGBAR...22-35JCT KGBASL...22-35 KIGBAL...22	
		400-040F	4	5		4.76		0.4					●		
	430-040F	4.3	5		4.76		0.4					●			
	450-040F	4.5	5	12.7	4.76	5.5	0.4	-	-0.025	+0.025	●				
	480-040F	4.8	5		5		0.4					●			
	GBA43L	125-020F	1.25	2				0.2						●	KGBAL...22-15 KGBAL...22-15JCT KGBASR...22-15 KIGBAR...22
		145-020F	1.45	2				0.2						●	
		150-020F	1.5	3.5				0.2						●	
		175-020F	1.75	3.5				0.2						●	
		185-020F	1.85	3.5				0.2						●	
		200-020F	2	3.5				0.2						●	
		230-020F	2.3	3.5		4.76		0.2						●	
		250-030F	2.5	4				0.3						●	*4
		265-030F	2.65	4				0.3						●	
		280-030F	2.8	4				0.3						●	
		300-030F	3	4				0.3						●	
		330-030F	3.3	4				0.3						●	
		350-030F	3.5	5				0.3						●	*6
		400-040F	4	5				0.4						●	

Right-hand shown

Recommended cutting conditions ➔ G141

CDX shows available grooving depth.


*2 : KGBAR...22-25, KGBAR...22-25T5, KGBAR...22-25JCT, KGBASL...22-25, KGBASL...22-25T5, KIGBAL...22

*4 : KGBAL...22-25, KGBAL...22-25T5, KGBAL...22-25JCT, KGBASR...22-25, KGBASR...22-25T5, KIGBAR...22

*6 : KGBAL...22-35, KGBAL...22-35JCT, KGBASR...22-35, KIGBAR...22

● : Standard item

GBA43

		Carbon steel / Alloy steel								○	○	●	●	●	P	
		Stainless steel								○	○	○	○	○	M	
		Cast iron													K	
		Non-ferrous metals													N	
		Titanium alloy													S	
		Hard materials (~ 40HRC)													H	
		Hard materials (40HRC ~)														
Insert	Description	No. of edges	Dimension (mm)						Tolerance (mm)		Carbide				Cermat	Applicable toolholder ➡ G13~G17 G89
			CW	CDX	IC	S	D1	RE	CW min.	CW max.	PVD					
											PR1215	PR1625	PR2015	PR2025		
  Molded Chipbreaker	GBA43R	140-010GM	1.4	3.5				0.1			○	○	●	●	KGBAR...22-15 KGBAR...22-15JCT KGBASL...22-15 KIGBAL...22	
		150-020GM	1.5	3.5				0.2			○	○	●	●		
		175-020GM	1.75	3.5				0.2			○	○	●	●		
		185-020GM	1.85	3.5				0.2			○	○	●	●		
		200-020GM	2	3.5				0.2			○	○	●	●		
	230-020GM	2.3	3.5				0.2			○	○	●	●	*1		
	250-030GM	2.5	5				0.3			○	○	●	●			
	265-030GM	2.65	5				0.3			○	○	●	●			
	300-030GM	3	5				0.3			○	○	●	●			
	330-030GM	3.3	5				0.3			○	○	●	●			
	350-030GM	3.5	5				0.3			○	○	●	●	*5		
	400-040GM	4	5				0.4			○	○	●	●			
	GBA43L	140-010GM	1.4	3.5	12.7	4.76	5.5	0.1	-0.025	+0.025	○	○	●	●	KGBAL...22-15 KGBAL...22-15JCT KGBASR...22-15 KIGBAL...22	
		150-020GM	1.5	3.5				0.2			○	○	●	●		
		175-020GM	1.75	3.5				0.2			○	○	●	●		
		185-020GM	1.85	3.5				0.2			○	○	●	●		
		200-020GM	2	3.5				0.2			○	○	●	●		
		230-020GM	2.3	3.5				0.2			○	○	●	●	*3	
		250-030GM	2.5	5				0.3			○	○	●	●		
		265-030GM	2.65	5				0.3			○	○	●	●		
		300-030GM	3	5				0.3			○	○	●	●		
		330-030GM	3.3	5				0.3			○	○	●	●		
		350-030GM	3.5	5				0.3			○	○	●	●	*6	
		400-040GM	4	5				0.4			○	○	●	●		

Right-hand shown

CDX shows available grooving depth.

*1 : KGBAR...22-25T5, KGBAR...22-25JCT, KGBASL...22-25T5, KIGBAL...22

*3 : KGBAL...22-25T5, KGBAL...22-25JCT, KGBASR...22-25T5, KIGBAR...22

*5 : KGBAR...22-35, KGBAR...22-35JCT, KGBASL...22-35, KIGBAL...22

*6 : KGBAL...22-35, KGBAL...22-35JCT, KGBASR...22-35, KIGBAR...22

Recommended cutting conditions ➡ G141



GBA43

		Carbon steel / Alloy steel										<									
--	--	----------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Right-hand shown

CDX shows available grooving depth.

*2 : KGBAR...22-25, KGBAR...22-25T5, KGBAR...22-25JCT, KGBASL...22-25, KGBASL...22-25T5, KIGBAL...22

*4 : KGBAL...22-25, KGBAL...22-25T5, KGBAL...22-25JCT, KGBASR...22-25, KGBASR...22-25T5, KIGBAL...22


*5 : KGBAR...22-35, KGBAR...22-35JCT, KGBASL...22-35, KIGBAL...22

*6 : KGBAL...22-35, KGBAL...22-35JCT, KGBASR...22-35, KIGBAL...22

Recommended cutting conditions G141

● : Standard item ○ : Will be replaced with a new product □ : Expected to be discontinued in September 2026

CBN & PCD Inserts are
sold in 1 piece boxes

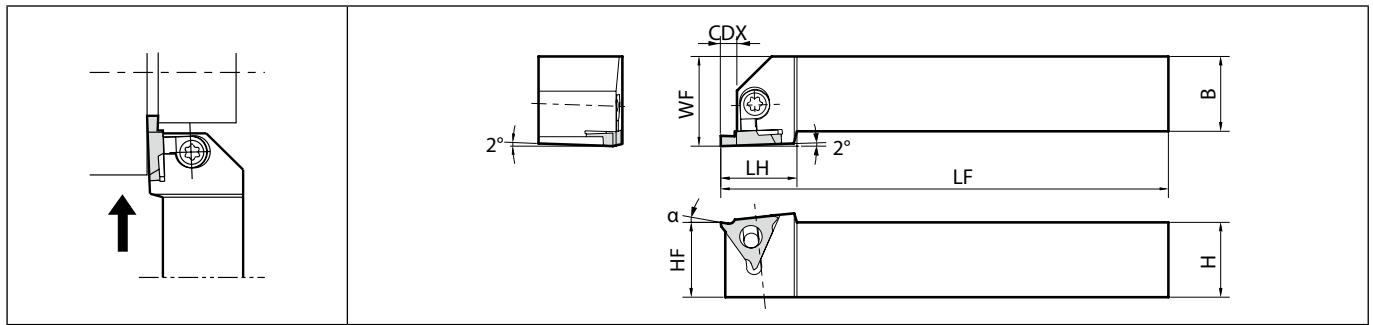KGBA (External grooving / Shallow grooving)

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability	Dimension (mm)										Spare parts		Applicable inserts  G6~G12
												Clamp set	Wrench	
		R	L	CDX	H	B	LH	HF	LF	WF				
KGBA [®] /L 2020K-16 2525M-16	   	2.5	20 25	20 25	24	20 25	125 150	25 30	LGBA-16 [®] /LS	FT-15	GBA32 [®] /L type			
KGBA [®] /L 2020H22-15 2020H22-25 2020H22-35 2020K22-15 2020K22-25 2020K22-25T5 2020K22-35 2525M22-15 2525M22-25 2525M22-25T5 2525M22-35	          	4 4.5 5.5 4 4.5 5.5 4 4.5 5.5	20 25	20 25	25.5	20 25	100 125 150	25 30	LGBA-22RS LGBA-22 [®] /LS	FT-15	GBA43 [®] /L type			

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

Clamp Set : LGBA-○○RS for Right-hand Toolholder and LGBA-○○LS for Left-hand Toolholder.

Rake Angle (α) after Installment of GBA insert

GBA32 [®] /L ○○○-○○○			GBA43 [®] /L ○○○-○○○			GBA43 [®] /L ○○○-○○○R (Full-R)		
α	Insert grades		α	Insert grades		α	Insert grades	
10°	TN620, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930 KPD001, KPD010		0°	KBN510, KBN525		10°	TN620, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930	
			10°	TN620, TC40N, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930 KPD001, KPD010		14°	TN620, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930	
	KW10		20°	KW10			KW10	
								Full-R Description
								050R~150R
								200R
								050R~200R


Rake Angle (α) after Installment of GBA-GM insert

α	Insert description
10°	GBA43 [®] /L 150-020GM
15°	GBA43 [®] /L 175-020GM
	GBA43 [®] /L 265-030GM
12°	GBA43 [®] /L 300-030GM
	GBA43 [®] /L 400-040GM

α indicates the rake angle at the center of the edge width, after installing insert.

● : Standard item

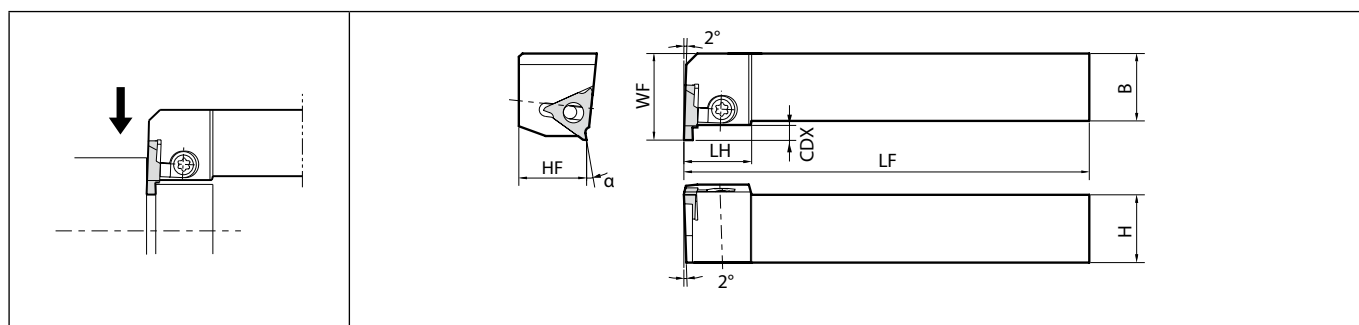

KGBAS (External grooving / Shallow grooving)

Right-hand shown | Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

Toolholder dimensions


Description	Availability		Dimension (mm)								Spare parts		Applicable inserts ➡ G6~G12
											Clamp set	Wrench	
	R	L	CDX	H	B	LH	HF	LF	WF				
KGBAS% 2020K-16 2525M-16	●	●	2.5	20	20	25	20	125	25	LGBA-16 ¹ / ₈ S	FT-15	GBA32 ¹ / ₈ type	
KGBAS% 2020K22-15 2020K22-25 2020K22-25T5 2020K22-35 2525M22-15 2525M22-25 2525M22-25T5 2525M22-35	●	●	4	20	20	25	20	125	27	LGBA-22 ¹ / ₈ S	FT-15	GBA43 ¹ / ₈ type	
	●	●	4.5										
	●	●	5.5										
	●	●	4	25	25	25	150	32					
	●	●	4.5										
	●	●	5.5										
	●	●	5.5										

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

See Page **G13** for Rake Angle (α) after Installment of Insert.

Clamp Set : LGBA-○○LS for Right-hand Toolholder and LGBA-○○RS for Left-hand Toolholder.

● : Standard item

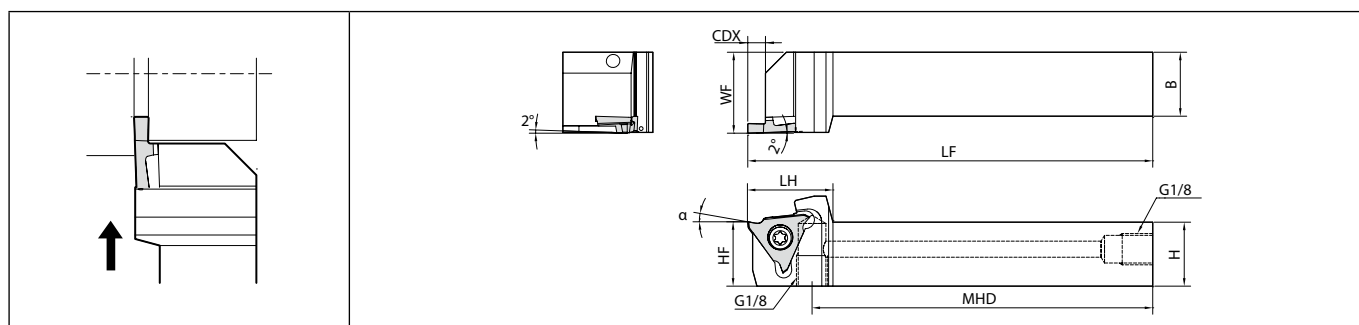KGBA-JCT (External grooving / Shallow grooving, Coolant-through holder)

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions


Description	Availability		Dimension (mm)								Coolant hole	Spare parts				Applicable inserts 🔧 G6~G12
												Plug	Screw	Wrench	Wrench	
	R	L	CDX	H	B	LH	MHD	HF	LF	WF						
KGBA ^{90°} 2020K-16JCT 2525K-16JCT	● ●	● ●	2.5 25	20 25	20 25	24	107.5	20 25	125 30	25 30	Yes	HSG1/8X8.0	SB-4085TR	FT-15	-	GBA32 ^{90°} L type
KGBA ^{90°} 2020K22-15JCT 2020K22-25JCT 2020K22-35JCT 2525K22-15JCT 2525K22-25JCT 2525K22-35JCT	● ● ● ● ● ●	● ● ● ● ● ●	4 5.5 4 5.5	20 20	20	26.5	105	20 25	25 30	25 30	Yes	HSG1/8X8.0	SB-5085TR	-	LTW-20	GBA43 ^{90°} L type

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

See Page **G13** for Rake Angle (α) after Installment of Insert.

KGBA-JCT toolholder is screw clamp type.

Please see page **H16** and **H17** for piping parts of coolant-through holders.

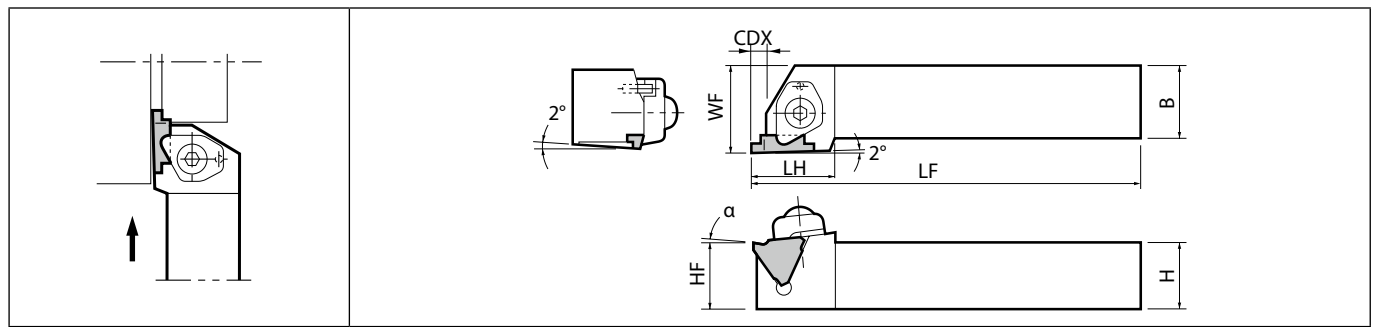KGB (External grooving / Shallow grooving)

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description		Availability		Dimension (mm)							Spare parts				Applicable inserts  G6~G12
											Clamp	Clamp bolt	Spring	Wrench	
		R	L	CDX	H	B	LH	HF	LF	WF					
KGB [®] /L	2020K-16			2.5	20	20	24	20	125	25	CGB [®] /L	BH6X25	SP-6	LW-4	GBA32 [®] /L type
	2525M-16				25	25		25	150	30					
KGB [®] /L	2020K22-15			4	20	20	25.5	20	125	25	CGB [®] /L	BH6X25	SP-6	LW-4	GBA43 [®] /L type
	2020K22-25			4.5				20	125	25					
	2020K22-35			5.5											
	2525M22-15			4	25	25		25	150	30					
	2525M22-25			4.5											
	2525M22-35			5.5											

KGB will be switched to KGBA=> **G13**


CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

KGB Clamp : CGBR for Right-hand Toolholder and CGBL for Left-hand Toolholder.

Alternative Toolholder Reference Table

KGBA	← (KGB)
KGBA ^{R/L} ...22-15	KGB ^{R/L} ...22-15
KGBA ^{R/L} ...22-25	KGB ^{R/L} ...22-25
KGBA ^{R/L} ...22-35	KGB ^{R/L} ...22-35
KGBA ^{R/L} ...22-25T5	KGB ^{R/L} ...22-25 (Available grooving depth has a limit)


· Short shank type is not available for KGB / KGBS.

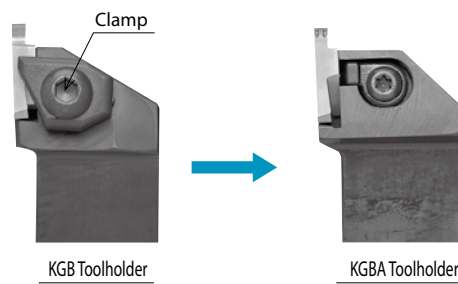

* KGB / KGBS toolholder will be switched to KGBA / KGBAS.
Better Chip flow.

○ : Check Availability

KGBS (External grooving / Shallow grooving)

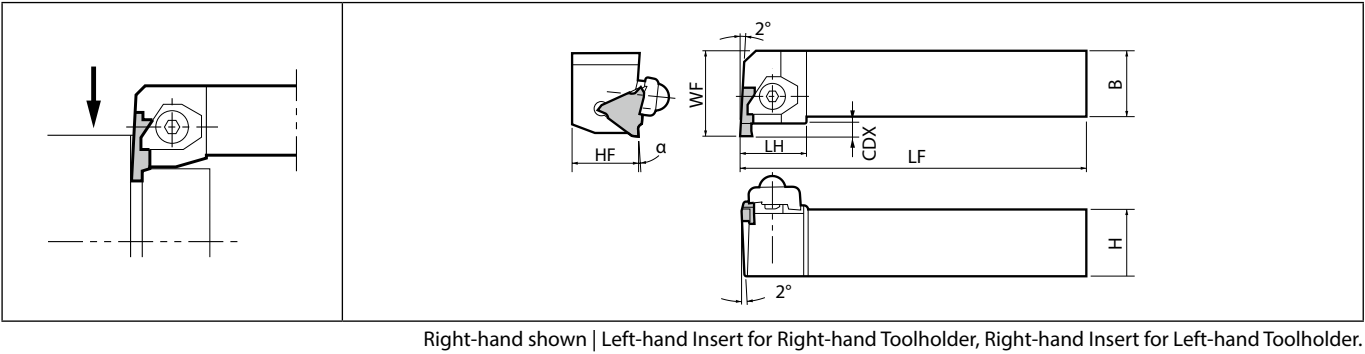

Right-hand shown | Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		Dimension (mm)								Spare parts				Applicable inserts ➡ G6~G12
											Clamp	Clamp bolt	Spring	Wrench	
	R	L	CDX	H	B	LH	HF	LF	WF						
KGBS ^{®/L} 2020K-16 2525M-16	○	○	2.5	20	20	25	20	125	25	CGB ^{1/8}	BH6X25	SP-6	LW-4	GBA32 ^{1/8} type	
	○	○		25	25		25	150	30						
KGBS ^{®/L} 2020K22-15 2020K22-25 2020K22-35 2525M22-15 2525M22-25 2525M22-35	○	○	4	20	20	25	20	125	27	CGB ^{1/8}	BH6X25	SP-6	LW-4	GBA43 ^{1/8} type	
	○	○	4.5				20	125	27						
	○	○	5.5	25	25		25	150	32						
	○	○	4												
	○	○	4.5												
	○	○	5.5												

KGBS will be switched to KGBAS=> **G14**
KGBS Clamp : CGBL for Right-hand Toolholder and CGBR for Left-hand Toolholder.

Alternative Toolholder Reference Table

KGBAS	← (KGBS)
KGBAS ^{R/L} ...22-15	KGBS ^{R/L} ...22-15
KGBAS ^{R/L} ...22-25	KGBS ^{R/L} ...22-25
KGBAS ^{R/L} ...22-35	KGBS ^{R/L} ...22-35
KGBAS ^{R/L} ...22-25T5	KGBS ^{R/L} ...22-25 (Available grooving depth has a limit)

○ : Check Availability

GBF (for automatic lathe)

High precision with edge width tolerance of $\pm 0.02\text{ mm}$
High efficiency MEGACOAT coating technology for long tool life

1

Stable chip control with GL chipbreaker

GL Chipbreaker controls chips stable at both grooving and turning.
(Turning is not recommended for GBF32R075-005GL)


G


Grooving

External

Internal

Face

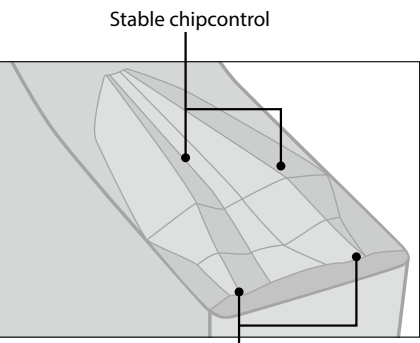

Chips are short, curled and break evenly in low feed machining.
Prevents chip clogging.

Chip control comparison (internal evaluation)

	GL chipbreaker	Competitor A
Grooving $f = 0.05\text{ mm/rev}$ $d = 1.5\text{ mm}$		
Turning $f = 0.04\text{ mm/rev}$ $ap = 0.2\text{ mm}$		


Cutting conditions: $V_c = 80\text{ m/min}$, edge width 1 mm
Workpiece material : SUS304

2

Good surface finish



GL chipbreaker controls chips stable at high feed machining,
Good surface finish of side wall

Surface roughness comparison (internal evaluation)

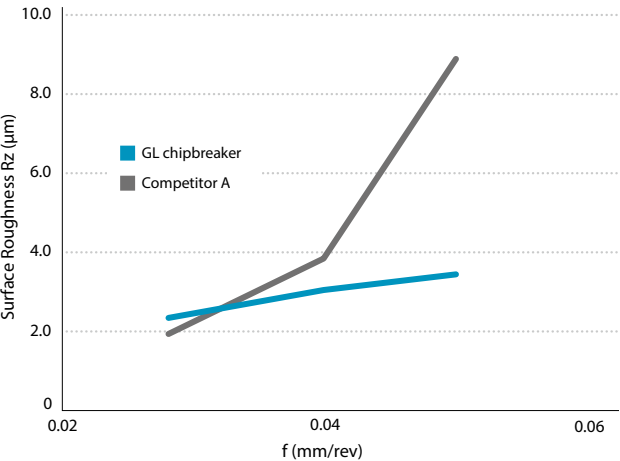


Cutting conditions: $V_c = 80\text{ m/min}$, $d = 1.5\text{ mm}$, $f = 0.03\sim 0.05\text{ mm/rev}$, edge width 1 mm
Workpiece material : SCM415

Chip control comparison (internal evaluation)

	$f = 0.03$	$f = 0.04$	$f = 0.05$
GL chipbreaker			
Competitor A (Molded chipbreaker)			

KGBF-JCTM (for automatic lathe)

Discharges coolant from the top of the insert



Coolant hole

Ample supply of coolant to the cutting edge.
Prevents coolant stream spreading which slows the coolant flow.


Direction of supply

Sufficient coolant between the chipbreaker and the chips
Stable chip curls and sufficient cooling of the insert

1 Excellent chip control provide long tool life

2 Superior cooling action improves tool life

External Grooving KGBF-JCTM

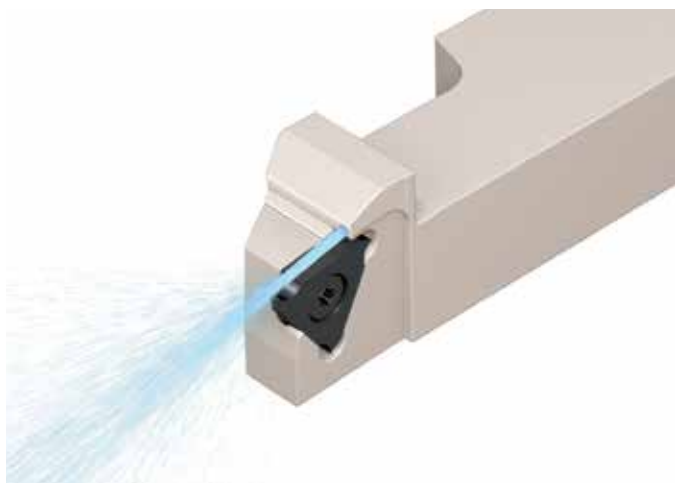

- Provides Coolant toward the Rake Surface of Insert
- Specification

Edge Width : 0.25 -3 mm


Ground Chipbreaker/Molded GL Chipbreaker

Maximum groove depth : 3 mm

Coolant Discharging Comparison (Internal evaluation)

Small chips and better cooling of the insert leads to longer tool life

- Cutting Edge
- Coolant Hole




G



Grooving

GBF


			Carbon steel / Alloy steel										☺☺		P		
			Stainless steel										☺☹		M		
			Cast iron										☹☹		K		
			Non-ferrous metals										☹☹		N		
			Titanium alloy										☹☺		S		
			Hard materials (~ 40HRC)												H		
			Hard materials (40HRC ~)														
Insert		Description		No. of edges	Dimension (mm)						Tolerance (mm)		Carbide		Applicable toolholder ☞ G23~G26		
					CW	CDX	IC	S	D1	RE	CW min.	CW max.	PVD				-
													PR1215	PR1535			
	 Sharp edge	GBF32R	025-000F	0.25	0.6	9.525	3.18	4.4	0	-0.02	+0.02	●	●	●	KGBFR...-16F KGBFR...-16FJCTM KGBFSL...-16 S...KGBFL16		
			030-000F	0.3	0.8					-0.02	+0.02	●	●	●			
			033-000F	0.33	0.8					-0.025	+0.015	●	●	●			
			043-000F	0.43	1					-0.025	+0.015	●	●	●			
			050-000F	0.5	1.2					-0.02	+0.02	●	●	●			
			053-000F	0.53	1.2					-0.025	+0.015	●	●	●			
			065-000F	0.65	1.2					-0.02	+0.02	●	●	●			
			075-000F	0.75	2					-0.02	+0.02	●	●	●			
			080-000F	0.8	2					-0.02	+0.02	●	●	●			
			095-000F	0.95	2					-0.02	+0.02	●	●	●			
			100-000F	1	2					-0.02	+0.02	●	●	●			
			110-000F	1.1	2					-0.02	+0.02	●	●	●			
			120-000F	1.2	2					-0.02	+0.02	●	●	●			
			125-000F	1.25	2					-0.02	+0.02	●	●	●			
			130-000F	1.3	2					-0.02	+0.02	●	●	●			
			140-000F	1.4	2.7					-0.02	+0.02	●	●	●			
			145-000F	1.45	2.7					-0.02	+0.02	●	●	●			
			150-000F	1.5	2.7					-0.02	+0.02	●	●	●			
			165-000F	1.65	2.7					-0.02	+0.02	●	●	●			
			170-000F	1.7	3					-0.02	+0.02	●	●	●			
		175-000F	1.75	3	-0.02	+0.02	●	●	●								
		200-000F	2	3	-0.02	+0.02	●	●	●								
		GBF32L	025-000F	0.25	0.6	9.525	3.18	4.4	0	-0.02	+0.02	●	●	●	KGBFL...-16F KGBFSR...-16		
			030-000F	0.3	0.8					-0.02	+0.02	●	●	●			
			033-000F	0.33	0.8					-0.025	+0.015	●	●	●			
			043-000F	0.43	1					-0.025	+0.015	●	●	●			
			050-000F	0.5	1.2					-0.02	+0.02	●	●	●			
			053-000F	0.53	1.2					-0.025	+0.015	●	●	●			
			065-000F	0.65	1.2					-0.02	+0.02	●	●	●			
			075-000F	0.75	2					-0.02	+0.02	●	●	●			
			080-000F	0.8	2					-0.02	+0.02	●	●	●			
			095-000F	0.95	2					-0.02	+0.02	●	●	●			
			100-000F	1	2					-0.02	+0.02	●	●	●			
			110-000F	1.1	2					-0.02	+0.02	●	●	●			
120-000F	1.2		2	-0.02	+0.02					●	●	●					
125-000F	1.25		2	-0.02	+0.02					●	●	●					
GBF32R	075-005GL	0.75	2	9.525	3.18	4.4	0.05	-0.02	+0.02	●	●	KGBFR...-16F KGBFR...-16FJCTM KGBFSL...-16 S...KGBFL16					
	095-005GL	0.95	2							●	●						
	100-005GL	1	2							●	●						
	150-010GL	1.5	2.7							●	●						
	200-010GL	2	3							●	●						
	300-010GL	3	3							●	●						

Right-hand shown
Max. Cutting Dia. : See Page G27

Recommended cutting conditions  G142

● : Standard item

GBF

			Carbon steel / Alloy steel										P			
			Stainless steel										M			
			Cast iron										K			
			Non-ferrous metals										N			
			Titanium alloy										S			
			Hard materials (~ 40HRC)										H			
			Hard materials (40HRC ~)													
Insert		Description		No. of edges	Dimension (mm)						Tolerance (mm)		Carbide		Applicable toolholder ➡ G23~G26	
					CW	CDX	IC	S	D1	RE	CW min.	CW max.	PVD			-
													PRI215	PRI535		
	GBF32R	025-005	0.25	0.6	3	9.525	3.18	4.4	0.05	-0.02	+0.02	●	●	KGBFR...-16F KGBFR...-16FJCTM KGBFSL...-16 S...KGBFL16		
	030-005	0.3	0.8	0.05					-0.02	+0.02	●	●				
	033-005	0.33	0.8	0.05					-0.025	+0.015	●	●				
	043-005	0.43	1	0.05					-0.025	+0.015	●	●				
	050-005	0.5	1.2	0.05					-0.02	+0.02	●	●				
	053-005	0.53	1.2	0.05					-0.025	+0.015	●	●				
	065-005	0.65	1.2	0.05					-0.02	+0.02	●	●				
	075-005	0.75	2	0.05					-0.02	+0.02	●	●				
	075-010	0.75	2	0.1					-0.02	+0.02	●	●				
	080-005	0.8	2	0.05					-0.02	+0.02	●	●				
	080-010	0.8	2	0.1					-0.02	+0.02	●	●				
	095-005	0.95	2	0.05					-0.02	+0.02	●	●				
	095-010	0.95	2	0.1					-0.02	+0.02	●	●				
	100-005	1	2	0.05					-0.02	+0.02	●	●				
	100-010	1	2	0.1					-0.02	+0.02	●	●				
	110-005	1.1	2	0.05					-0.02	+0.02	●	●				
	110-010	1.1	2	0.1					-0.02	+0.02	●	●				
	120-005	1.2	2	0.05					-0.02	+0.02	●	●				
	120-010	1.2	2	0.1					-0.02	+0.02	●	●				
	125-005	1.25	2	0.05					-0.02	+0.02	●	●				
	125-010	1.25	2	0.1					-0.02	+0.02	●	●				
	130-005	1.3	2	0.05					-0.02	+0.02	●	●				
	130-010	1.3	2	0.1					-0.02	+0.02	●	●				
	140-005	1.4	2.7	0.05					-0.02	+0.02	●	●				
	140-010	1.4	2.7	0.1					-0.02	+0.02	●	●				
	145-005	1.45	2.7	0.05					-0.02	+0.02	●	●				
	145-010	1.45	2.7	0.1					-0.02	+0.02	●	●				
	150-005	1.5	2.7	0.05					-0.02	+0.02	●	●				
	150-010	1.5	2.7	0.1					-0.02	+0.02	●	●				
	165-005	1.65	2.7	0.05					-0.02	+0.02	●	●				
	165-010	1.65	2.7	0.1					-0.02	+0.02	●	●				
	170-005	1.7	3	0.05					-0.02	+0.02	●	●				
	170-010	1.7	3	0.1					-0.02	+0.02	●	●				
	175-005	1.75	3	0.05					-0.02	+0.02	●	●				
	175-010	1.75	3	0.1					-0.02	+0.02	●	●				
	200-005	2	3	0.05					-0.02	+0.02	●	●				
	200-010	2	3	0.1					-0.02	+0.02	●	●				
	225-005	2.25	3	0.05					-0.02	+0.02	●	●				
	225-010	2.25	3	0.1					-0.02	+0.02	●	●				
	250-005	2.5	3	0.05					-0.02	+0.02	●	●				
	250-010	2.5	3	0.1					-0.02	+0.02	●	●				
	300-005	3	3	0.05					-0.02	+0.02	●	●				
	300-010	3	3	0.1					-0.02	+0.02	●	●				

Right-hand shown
Max. Cutting Dia. : See Page G27

Recommended cutting conditions G142


● : Standard item

G



Grooving

GBF


		Carbon steel / Alloy steel										●	●	P	
		Stainless steel										○	●	M	
		Cast iron											●	K	
		Non-ferrous metals											●	N	
		Titanium alloy										●	●	S	
		Hard materials (~ 40HRC)												H	
		Hard materials (40HRC ~)													
Insert	Description	No. of edges	Dimension (mm)						Tolerance (mm)		Carbide		Applicable toolholder ➡ G23,G25		
			CW	CDX	IC	S	D1	RE	CW min.	CW max.	PVD			-	
											PR1215	PR1535			GW15
	GBF32L 025-005	3	0.25	0.6	9.525	3.18	4.4	0.05	-0.02	+0.02	●	●	●	KGBFL...-16F KGBFSR...-16	
	030-005		0.3	0.8				0.05	-0.02	+0.02	●	●	●		
	033-005		0.33	0.8				0.05	-0.025	+0.015	●	●	●		
	043-005		0.43	1				0.05	-0.025	+0.015	●	●	●		
	050-005		0.5	1.2				0.05	-0.02	+0.02	●	●	●		
	053-005		0.53	1.2				0.05	-0.025	+0.015	●	●	●		
	065-005		0.65	1.2				0.05	-0.02	+0.02	●	●	●		
	075-005		0.75	2				0.05	-0.02	+0.02	●	●	●		
	075-010		0.75	2				0.1	-0.02	+0.02	●	●	●		
	080-005		0.8	2				0.05	-0.02	+0.02	●	●	●		
	080-010		0.8	2				0.1	-0.02	+0.02	●	●	●		
	095-005		0.95	2				0.05	-0.02	+0.02	●	●	●		
	095-010		0.95	2				0.1	-0.02	+0.02	●	●	●		
	100-005		1	2				0.05	-0.02	+0.02	●	●	●		
	100-010		1	2				0.1	-0.02	+0.02	●	●	●		
	110-005		1.1	2				0.05	-0.02	+0.02	●	●	●		
	110-010		1.1	2				0.1	-0.02	+0.02	●	●	●		
	120-005		1.2	2				0.05	-0.02	+0.02	●	●	●		
	120-010		1.2	2				0.1	-0.02	+0.02	●	●	●		
	125-005		1.25	2				0.05	-0.02	+0.02	●	●	●		
	125-010		1.25	2				0.1	-0.02	+0.02	●	●	●		
	130-005		1.3	2				0.05	-0.02	+0.02	●	●	●		
	130-010		1.3	2				0.1	-0.02	+0.02	●	●	●		
	140-005		1.4	2.7				0.05	-0.02	+0.02	●	●	●		
	140-010		1.4	2.7				0.1	-0.02	+0.02	●	●	●		
	145-005		1.45	2.7				0.05	-0.02	+0.02	●	●	●		
	145-010		1.45	2.7				0.1	-0.02	+0.02	●	●	●		
	150-005		1.5	2.7				0.05	-0.02	+0.02	●	●	●		
	150-010		1.5	2.7				0.1	-0.02	+0.02	●	●	●		
	165-005		1.65	2.7				0.05	-0.02	+0.02	●	●	●		
	165-010		1.65	2.7				0.1	-0.02	+0.02	●	●	●		
	170-005		1.7	3				0.05	-0.02	+0.02	●	●	●		
	170-010		1.7	3				0.1	-0.02	+0.02	●	●	●		
	175-005		1.75	3				0.05	-0.02	+0.02	●	●	●		
	175-010		1.75	3				0.1	-0.02	+0.02	●	●	●		
	200-005		2	3				0.05	-0.02	+0.02	●	●	●		
	200-010		2	3				0.1	-0.02	+0.02	●	●	●		
	225-005		2.25	3				0.05	-0.02	+0.02	●	●	●		
	225-010		2.25	3				0.1	-0.02	+0.02	●	●	●		
	250-005		2.5	3				0.05	-0.02	+0.02	●	●	●		
	250-010		2.5	3				0.1	-0.02	+0.02	●	●	●		
	300-005		3	3				0.05	-0.02	+0.02	●	●	●		
	300-010		3	3				0.1	-0.02	+0.02	●	●	●		

Right-hand shown
Max. Cutting Dia. : See Page G27

Recommended cutting conditions ● G142

● : Standard item

KGBF-F (External grooving / Shallow grooving)

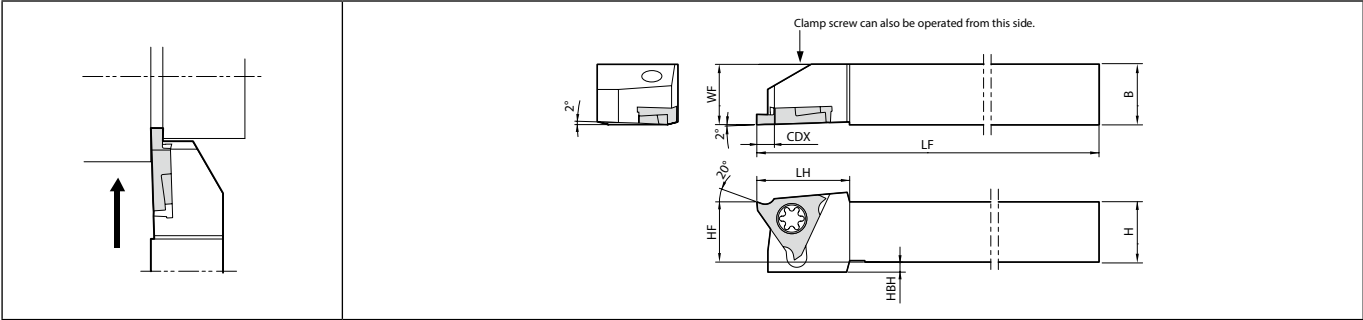

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions


Description	Availability		Dimension (mm)								Spare parts		Applicable inserts ➡ G20~G22
											Screw	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	LF	WF			
KGBF [®] /L 1010JX-16F	●	●	3	10	10	18.5	10	4	120	10	SB-4070TRW	FT-8	GBF32 [®] /L type
1212JX-16F	●	●		12	12		12	2		12			
1616JX-16F	●	●		16	16		16	-		16			
2020JX-16F	●	●		20	20		20	-		20			

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.



Grooving

KGBF-JCTM (External grooving / Shallow grooving, Coolant-through holder)

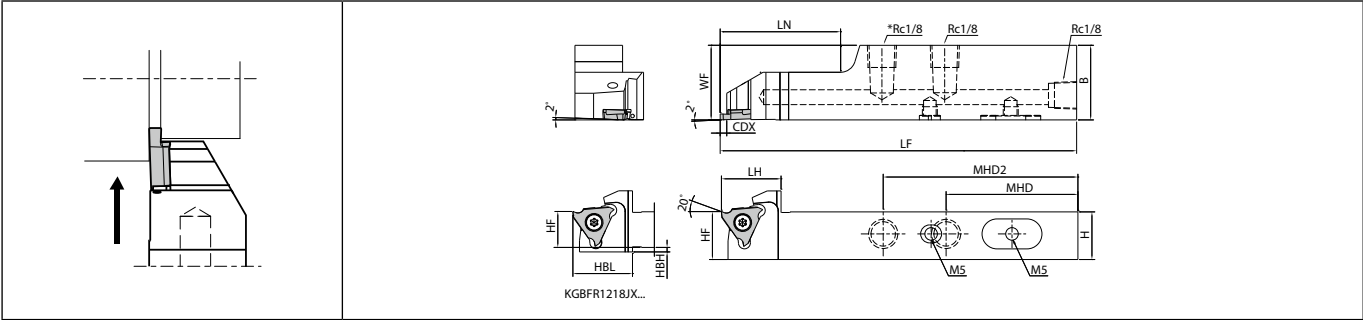

Right-hand shown | Right-hand Insert for Right-hand Toolholder. | KGBFR1218JX-16FJCTM : 2-Rc1/8


Toolholder dimensions

Description		Availability	Dimension (mm)												Coolant hole	Spare parts				Applicable inserts  G20,G21	
			R	CDX	H	B	LH	MHD	MHD2	HF	HBH	HBL	LF	LN		WF					
KGBFR	1218JX-16FJCTM	●	3	12	18	20	54	-	12	1.5	20	120	28	12	Yes	GP-1	H5SX4LP	SB-4070TRW	FT-8	GBF32R type	
	1625JX-16FJCTM	●		16	25		44	65	16	-	-		40	16							
	2025JX-16FJCTM	●		20					20					20							

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.
Please see page H16 and H17 for piping parts of coolant-through holders.

● : Standard item

KGBFS (External grooving / Shallow grooving)

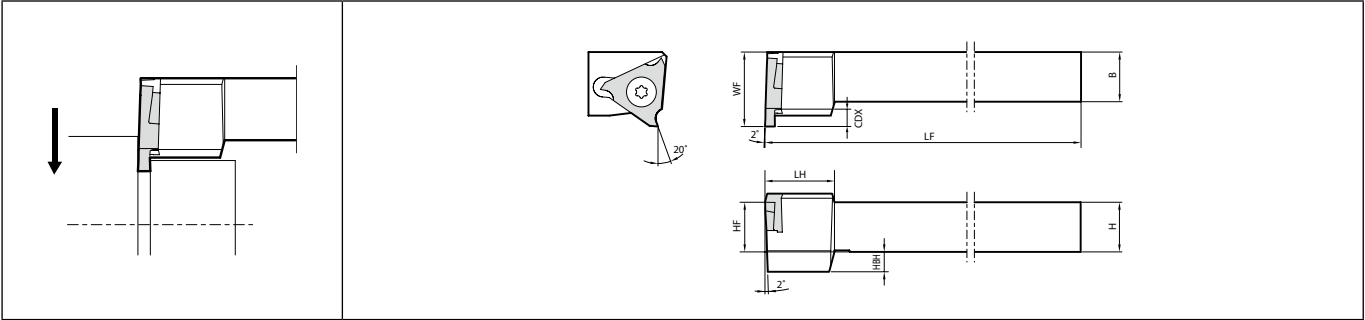

Right-hand shown | Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

Toolholder dimensions


Description	Availabi- lity		Dimension (mm)								Spare parts		Applicable inserts ➡ G20~G22
											Screw	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	LF	WF			
KGBFS% 1010JX-16	●	●	3	10	10	14	10	4	120	15	SB-4070TRW	FT-8	GBF32 ^L / _R type
1212JX-16	●	●		12	12		12	2		16			
1616JX-16	●	●		16	16		16	-		20			

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.



Grooving

S-KGBF (External grooving / Shallow grooving)

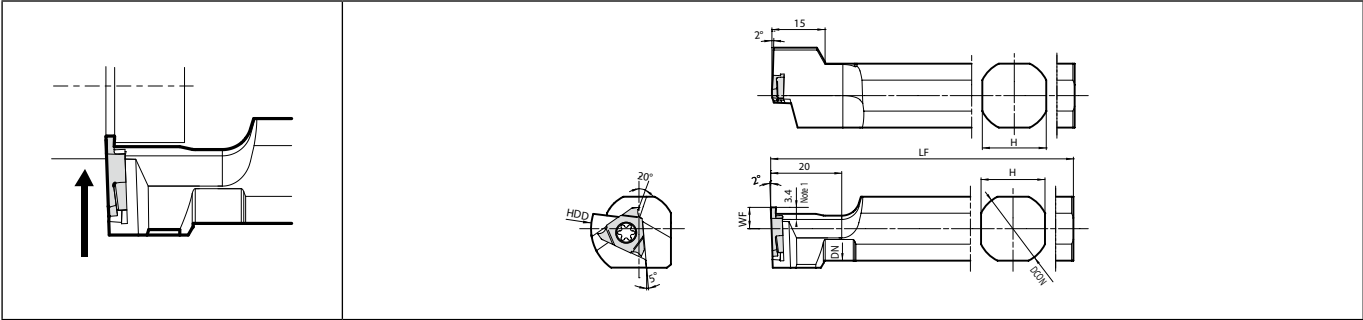

Left-hand shown | Right-hand Insert for Left-hand Toolholder. | Note 1) CDX shows available grooving depth.

Toolholder dimensions

Description	Availability	Dimension (mm)							Spare parts		Applicable inserts ➡ G20,G21
									Screw	Wrench	
		L	DCON	H	DN	HDD	LF	WF			
S12F- KGBFL16	●	12	11	11		80			SB-4070TRW	FT-8	GBF32R type
S14H- KGBFL16	●	14	13	13		100					
S15F- KGBFL16	●	15.875	15	15		85					
S16F- KGBFL16	●	16									
S19G- KGBFL16	●	19.05	17	18	27	90	6				
S19K- KGBFL16	●					120					
S20G- KGBFL16	●	20	18	19		90					
S20K- KGBFL16	●					120					
S22K- KGBFL16	●	22	20	21							
S25.0H- KGBFL16	●	25	23	24	32	100	10				
S25K- KGBFL16	●	25.4									

● : Standard item

Compatibility with GBF and GBA

1. GBF will fit KGBA / KGBAS toolholders.
 - Caution: The maximum groove depth for KGBA / KGBAS toolholders is 2.5 mm
2. GBA inserts will also fit KGBF-F toolholders
 - Caution: The rake angle after installation in the toolholder is 11°


KGBF-F toolholder with GBF insert maximum machining diameter

- 3 mm groove depth is available on workpiece diameters up to $\varnothing 51$ mm.
- 2.7 mm groove depth is available on workpiece diameters up to $\varnothing 100$ mm.
- 2.5 mm or less groove depth is available on workpiece diameters up to $\varnothing 200$ mm

The workpiece will interfere with the holder at maximum diameter or larger

Max. cutting diameter

Max. cutting diameter at 3 mm grooving depth

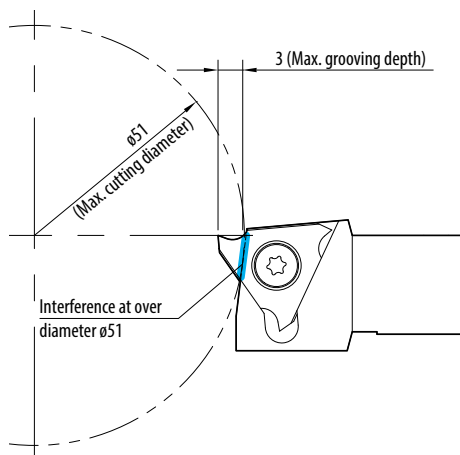

KGD External grooving

Various insert lineup for KGD toolholder

Smooth chip control

» Newly-introduced chipbreakers designed to cover a variety of workpiece materials.


High precision edge preparation

» High precision molding technology with tolerance ± 0.03 mm (Edge width 2, 3, 4 mm types)


Highly-reputed MEGACOAT technology

» Long tool life and high efficiency machining achieved by superior oxidation resistance and wear resistance.


Application map

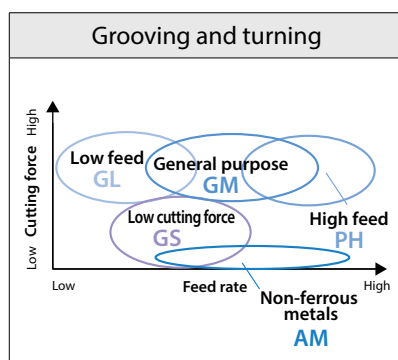

Chipbreaker selection

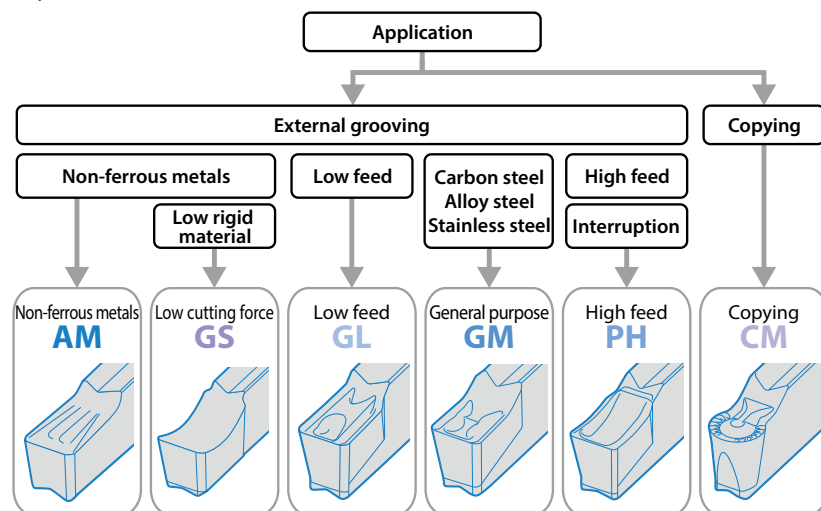

Comparison of chip control (SCM415, $V_c = 150$ m/min, $f = 0.15$ mm/rev)



GM chipbreaker



Competitor A





Competitor B

Smooth chip control

» Less chip biting troubles

Toolholder and insert combination of KGD type (new) and KGM type (conventional)

Insert setting angle for grooving toolholders

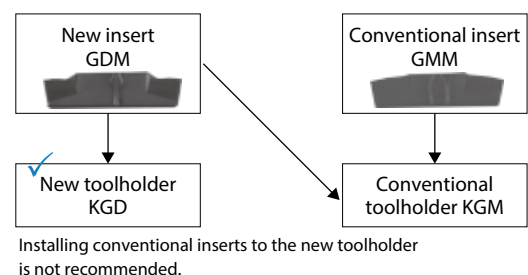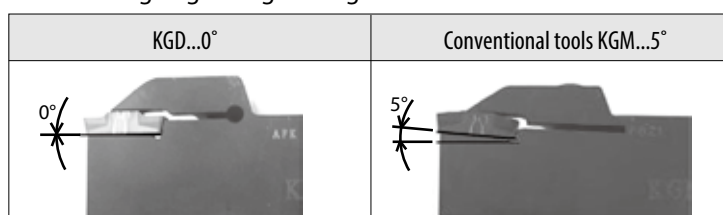

KGD grooving toolholder

Integral type and separate type (toolholder + blade) are available



Integral type




Separate type

High rigidity separate type toolholder

- Adaptable to wide applications by changing blades.
- Deals with various edge widths and cutting depths by changing the blade and toolholder combination.
- Even if the blade is broken, you only need to replace the broken part.


Toolholders for High Pressure Coolant

- Added coolant-through holder KGD-JCT/-JCTM with superior chip control and long tool life

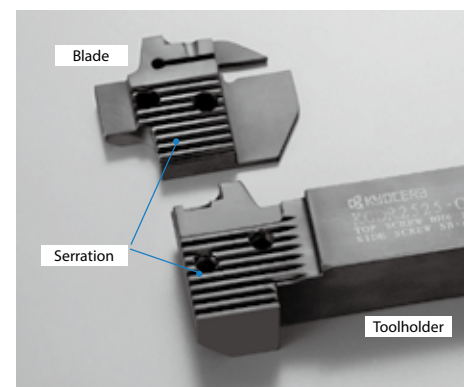

Structure of toolholder unit (toolholder + blade)

KGD-S (0° separate type)

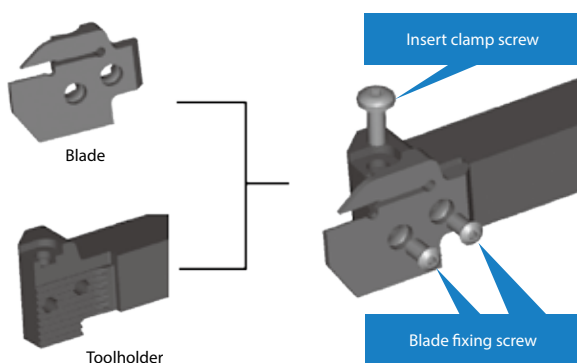

Note for the toolholder and blade combination of 0° separate type


Toolholder (KGD^R/L○○○○-C)

+

Blade (KGD^R/L-OT○○-C)

Right-hand blade for right-hand toolholder,
Left-hand blade for left-hand toolholder.

KGDS-S (90° separate type)

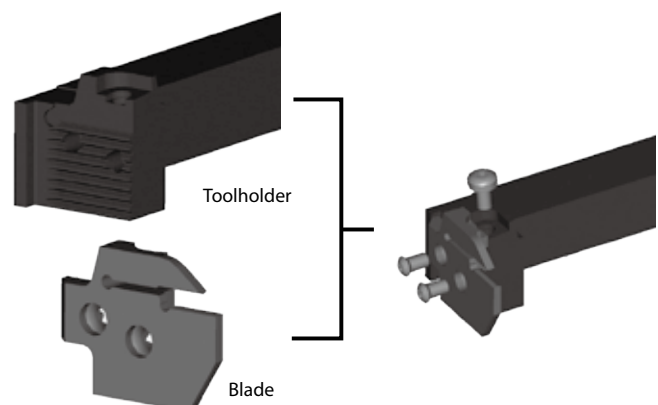

Note for the toolholder and blade combination of 90° separate type

Toolholder (KGDS^R/L○○○○-C)


+

Blade (KGD^{L/R}/OT○○-C)

Left-hand blade for right-hand toolholder,
Right-hand blade for left-hand toolholder.

												Carbon steel / Alloy steel				☺	☺	●	○	P
												Stainless steel				☺	☺	●	○	M
												Cast iron				☺	☺	●	○	K
												Non-ferrous metals								N
Insert		Description		No. of edges				Dimension (mm)				Tolerance (mm)		Carbide				Cer- met	Applicable toolholder ☺ G34~G42	
														PVD						
														PRI215	PRI225	PRI535	TN620			TN90
				CW	S	RE	INSL	CW min.	CW max.											
	 General purpose	GDM 2420N-020GM	2	2.4	4.3	0.2	20	- 0.03	+ 0.03	●	●	●	●	●	●	●	●	KGD [®] /L...2.4... KGD [®] /L...2...		
		GDM 3020N-020GM 3020N-040GM	2	3	4.3	0.2 0.4	20	- 0.03	+ 0.03	●	●	●	●	●	●	●	●	KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...		
		GDM 4020N-020GM 4020N-040GM 4020N-080GM	2	4	4.3	0.2 0.4 0.8	20	- 0.03	+ 0.03	●	●	●	●	●	●	●	●	KGD [®] /L...4... KGD [®] /L...3...		
		GDM 5020N-040GM 5020N-080GM	2	5	4.3	0.4 0.8	20	- 0.04	+ 0.04	●	●	●	●	●	●	●	●	KGD [®] /L...5... KGD [®] /L...4...		
		GDM 6020N-040GM 6020N-080GM	2	6	4.3	0.4 0.8	20	- 0.04	+ 0.04	●	●	●	●	●	●	●	●	KGD [®] /L...6... KGD [®] /L...5...		
		GDM 8030N-080GM	2	8	5.5	0.8	30	- 0.05	+ 0.05	●	●	●	●	●	●	●	●	KGD [®] /L...-8T25		
	 1-edge / General purpose	GDMS 2220N-020GM	1	2.2	4.3	0.2	20	- 0.03	+ 0.03	●	●	●	●	●	●	●	KGD [®] /L...2...			
		GDMS 3020N-040GM	1	3	4.3	0.4	20	- 0.03	+ 0.03	●	●	●	●	●	●	●	●	KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...		
		GDMS 4020N-040GM	1	4	4.3	0.4	20	- 0.03	+ 0.03	●	●	●	●	●	●	●	●	KGD [®] /L...4... KGD [®] /L...3...		
		GDMS 5020N-080GM	1	5	4.3	0.8	20	- 0.04	+ 0.04	●	●	●	●	●	●	●	●	KGD [®] /L...5... KGD [®] /L...4...		
		GDMS 6020N-080GM	1	6	4.3	0.8	20	- 0.04	+ 0.04	●	●	●	●	●	●	●	●	KGD [®] /L...6... KGD [®] /L...5...		

Inserts identification system

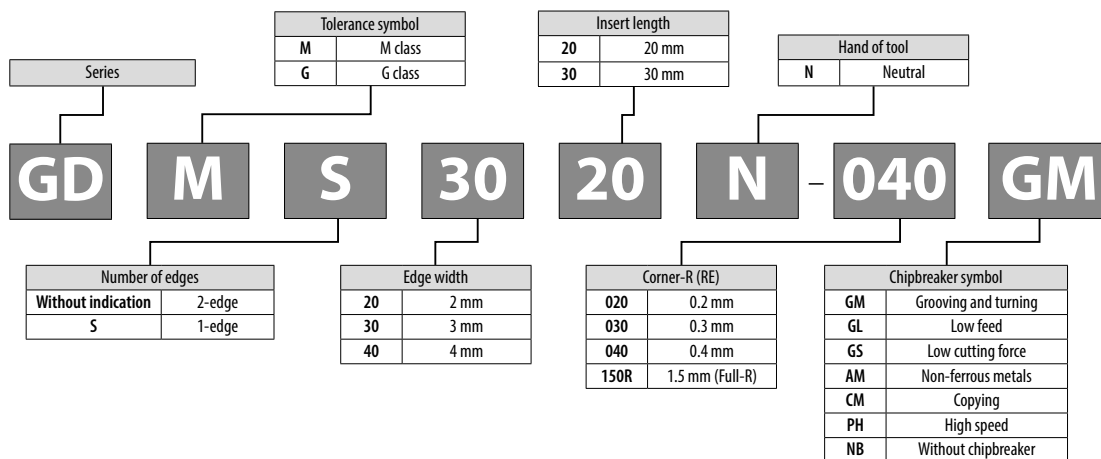




G30

				Carbon steel / Alloy steel												P		
				Stainless steel												M		
				Cast iron												K		
				Non-ferrous metals												N		
				Titanium alloy												S		
				Hard materials (~ 40HRC)												H		
Insert		Description		No. of edges		Dimension (mm)				Tolerance (mm)		Carbide				Cermet	Applicable toolholder G34~G42	
						CW	S	RE	INSL	CW min.	CW max.	PVD		DLC	-			-
												PR1215	PR1225					
 Low cutting force	GDG	2520N-020GS	2	2.5	4.3	0.2	20	- 0.02	+ 0.02								KGD [®] /L...2.4... KGD [®] /L...2...	
	GDG	3020N-020GS	2	3	4.3	0.2	20	- 0.02	+ 0.02								KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...	
	GDG	3520N-020GS	2	3.5	4.3	0.2	20	- 0.02	+ 0.02								KGD [®] /L...3...	
	GDG	4020N-040GS	2	4	4.3	0.4	20	- 0.02	+ 0.02								KGD [®] /L...4... KGD [®] /L...3...	
	GDG	5020N-040GS	2	5	4.3	0.4	20	- 0.02	+ 0.02								KGD [®] /L...5... KGD [®] /L...4...	
	GDG	6020N-040GS	2	6	4.3	0.4	20	- 0.02	+ 0.02								KGD [®] /L...6... KGD [®] /L...5...	
	GDG	8030N-040GS	2	8	5.5	0.4	30	- 0.02	+ 0.02								KGD [®] /L...8T25	
 Low feed	GDM	2420N-020GL	2	2.4	4.3	0.2	20	- 0.03	+ 0.03								KGD [®] /L...2.4... KGD [®] /L...2...	
	GDM	3020N-020GL 3020N-040GL	2	3	4.3	0.2 0.4	20	- 0.03	+ 0.03								KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...	
	GDM	4020N-020GL 4020N-040GL	2	4	4.3	0.2 0.4	20	- 0.03	+ 0.03								KGD [®] /L...4... KGD [®] /L...3...	
	GDM	5020N-040GL	2	5	4.3	0.4	20	- 0.04	+ 0.04								KGD [®] /L...5... KGD [®] /L...4...	
	GDM	6020N-040GL	2	6	4.3	0.4	20	- 0.04	+ 0.04								KGD [®] /L...6... KGD [®] /L...5...	
 Non-ferrous metals	GDG	3020N-020AM	2	3	4.3	0.2	20	- 0.02	+ 0.02									

Grooving

G31

GDM/GDMS/GDG



			Carbon steel / Alloy steel								☺☹		●●		○○		P
			Stainless steel								☺☹		☺☹				M
			Cast iron								☹☺						K
			Non-ferrous metals														N
			Titanium alloy										☹☹				S
			Hard materials (~ 40HRC)										○				H
			Hard materials (40HRC ~)														
Insert		Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide			Cermet	Applicable toolholder ☺ G34~G42			
				CW	S	RE	INSL	CW min.	CW max.	PVD			-				
										PR1215 PR1225 PR1335	TN620 TN90						
  High feed	GDM 2020N-020PH	2	2	4.3	0.2	20	- 0.03	+ 0.03	●	●				KGD [®] /L...2...			
	GDM 3020N-030PH	2	3	4.3	0.3	20	- 0.03	+ 0.03	●	●	●			KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...			
	GDM 4020N-030PH	2	4	4.3	0.3	20	- 0.03	+ 0.03	●	●	●			KGD [®] /L...4... KGD [®] /L...3...			
  1-edge / High feed	GDMS 2020N-020PH	1	2	4.3	0.2	20	- 0.03	+ 0.03	●	●	●			KGD [®] /L...2...			
	GDMS 3020N-030PH	1	3	4.3	0.3	20	- 0.03	+ 0.03	●	●	●			KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...			
	GDMS 4020N-030PH	1	4	4.3	0.3	20	- 0.03	+ 0.03	●	●	●			KGD [®] /L...4... KGD [®] /L...3...			
  Full R	GDM 3020N-150R-CM	2	3	4.3	1.5	20	- 0.03	+ 0.03	●	●	●	●	●	KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...			
	GDM 4020N-200R-CM	2	4	4.3	2	20	- 0.03	+ 0.03	●	●	●	●	●	KGD [®] /L...4... KGD [®] /L...3...			
	GDM 5020N-250R-CM	2	5	4.3	2.5	21	- 0.04	+ 0.04	●	●	●	●	●	KGD [®] /L...5... KGD [®] /L...4...			
	GDM 6020N-300R-CM	2	6	4.3	3	21	- 0.04	+ 0.04	●	●	●	●		KGD [®] /L...6... KGD [®] /L...5...			

GDM50/60-CM differs from other descriptions in length (INSL) to avoid interference of a toolholder with workpiece.

Recommended cutting conditions  G44

● : Standard item

GDGS


Cutting edge preparation				Carbon steel / Alloy steel												P				
				Stainless steel												M				
				Cast iron												K				
				Non-ferrous metals										●		N				
				Titanium alloy										●		S				
				Hard materials (~ 40HRC)												H				
				Hard materials (40HRC ~)										●						
				Sintered steel									●							
Insert		Description		Edge preparation type	No. of edges	Dimension (mm)					Tolerance (mm)		CBN			PCD	Applicable toolholder G34~G42			
						CW	S	RE	INSL	LE	CW min.	CW max.	KBN5M	KBN570	KPD001					
																		PVD	-	-
		GDGS	2020N-020NB	E08	1	2	4.3	0.2	20	2.9	-0.03	+0.03	●	●			KGD [®] /L...2...			
		GDGS	3020N-040NB	E08	1	3	4.3	0.4	20	2.9	-0.03	+0.03	●	●			KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...			
		GDGS	4020N-040NB	E08	1	4	4.3	0.4	20	2.9	-0.03	+0.03	●	●			KGD [®] /L...4... KGD [®] /L...3...			
		GDGS	5020N-040NB	E08	1	5	4.3	0.4	20	2.9	-0.03	+0.03	●	●			KGD [®] /L...5... KGD [®] /L...4...			
		GDGS	6020N-040NB	E08	1	6	4.3	0.4	20	2.9	-0.03	+0.03	●	●			KGD [®] /L...6... KGD [®] /L...5...			
		GDGS	2020N-020NB	F	1	2	4.3	0.2	20	2.9	-0.03	+0.03			●		KGD [®] /L...2...			
		GDGS	3020N-020NB	F	1	3	4.3	0.2	20	2.9	-0.03	+0.03			●		KGD [®] /L...3... KGD [®] /L...2.4... KGD [®] /L...2...			
		GDGS	4020N-020NB	F	1	4	4.3	0.2	20	2.9	-0.03	+0.03			●		KGD [®] /L...4... KGD [®] /L...3...			
		GDGS	5020N-020NB	F	1	5	4.3	0.2	20	2.9	-0.03	+0.03			●		KGD [®] /L...5... KGD [®] /L...4...			
		GDGS	6020N-020NB	F	1	6	4.3	0.2	20	2.9	-0.03	+0.03			●		KGD [®] /L...6... KGD [®] /L...5...			

Recommended cutting conditions ● G44

● : Standard item

CBN & PCD Inserts are
sold in 1 piece boxes

KGD (External grooving)

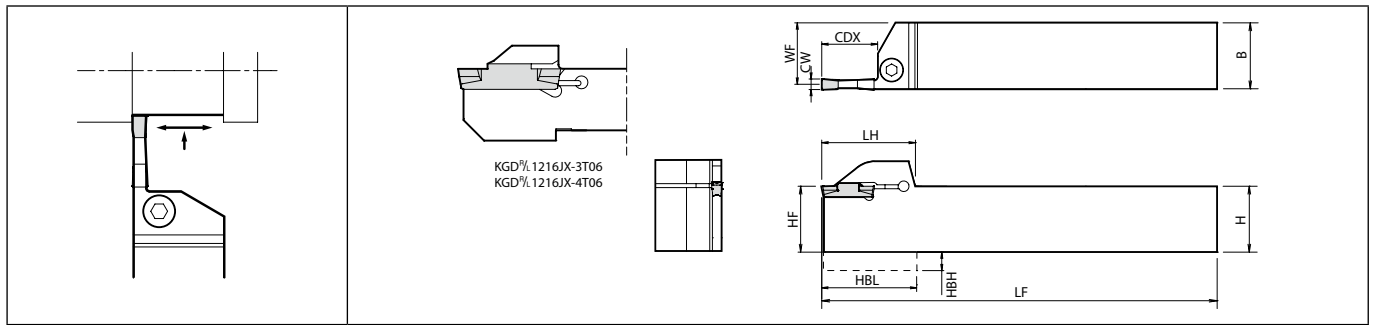

Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)												Spare parts				Applicable inserts ➔ G30~G33
															Clamp bolt	Screw	Wrench	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	HBL	LF	WF	CW min.	CW max.						
KGD%/ 1616H-2T06	●	●	6			27.7			28										GD..2020... GD..2220... GD..2420... GD..2520... GD..3020...
1616H-2T10	●	●	10	16	16	30.2	16	4	30.5	100	15.2								
1616H-2T17	●	●				31.2			31.5										
2012K-2T17	●	●	17		12	32.5					11.2								
2020K-2T06	●	●	6			28													
2020K-2T10	●	●	10	20	20	30.5	20			125	19.2	2	3			-	LW-4	-	
2020K-2T17	●	●	17			32.5													
2525M-2T06	●	●	6			28													
2525M-2T10	●	●	10	25	25	30.5	25			150	24.2								
2525M-2T17	●	●	17			32.5													
KGD%/ 2012K-2.4T17	●	●			12	32.5	20	-	-	125	11	2.4	3						GD..2420... , GD..2520... GD..3020...
2020K-2.4T17	●	●	17	20	20	32.5	20	-	-	125	19								
KGD%/ 1216JX-3T06	●	●	6	12		19.5	12	2	19	120									GD..3020... GD..3520... GD..4020...
1616H-3T06	●	●			16	27.7			28										
1616H-3T10	●	●	10	16		30.2	16	4	30.5	100									
1616H-3T20	●	●				34.2			34.5										
2012K-3T20	●	●	20		12	34.5					10.8								
2020K-3T06	●	●	6			28													
2020K-3T10	●	●	10	20	20	30.5	20			125	18.8	3	4			-	LW-4	-	
2020K-3T20	●	●	20			34.5													
2525M-3T06	●	●	6			28													
2525M-3T10	●	●	10	25	25	30.5	25			150	23.8								
2525M-3T20	●	●	20			35.5													
KGD%/ 1216JX-4T06	●	●	6	12	16	19.5	12	2	19	120	14.3								GD..4020... GD..5020...
2020K-4T10	●	●	10	20	20	30.5	20			125	18.3								
2020K-4T20	●	●	20			34.5													
2525M-4T10	●	●	10			30.5													
2525M-4T20	●	●	20	25	25	35.5	25			150	23.3								
2525M-4T25	●	●	25			40.5													
KGD%/ 2020K-5T10	●	●	10	20	20	30.5	20			125	17.8								GD..5020... GD..6020...
2020K-5T17	●	●	17			37.5													
2525M-5T10	●	●	10			30.5													
2525M-5T17	●	●	17	25	25	37.5	25			150	22.8	5	6			-	LW-4	-	
2525M-5T25	●	●	25			40.5													
KGD%/ 2525M-6T15	●	●	15	25	25	32.5	25	-	-	150	22.4	6	6						GD..6020...
2525M-6T30	●	●	30			45.5													
KGD%/ 2525M-8T25	●	●		25	25	43.3	25	7	44.2	150	22								GD..8030...
3232P-8T25	●	●		32	32		32	-	-	170	29	8	8						


CDX : Maximum depth to which processing can be made. (If the CDX is 20 mm or more, the maximum groove-depth of groove made by the 2-edge insert will be 18 mm.)

Recommended tightening torque of clamp bolt : 6.5N·m (HH5X○○), 8.0N·m (HH6X25), 2.5N·m (SE-50125TR)

Above toolholders are applicable to Cut-off, too.

● : Standard item

KGD (External grooving)

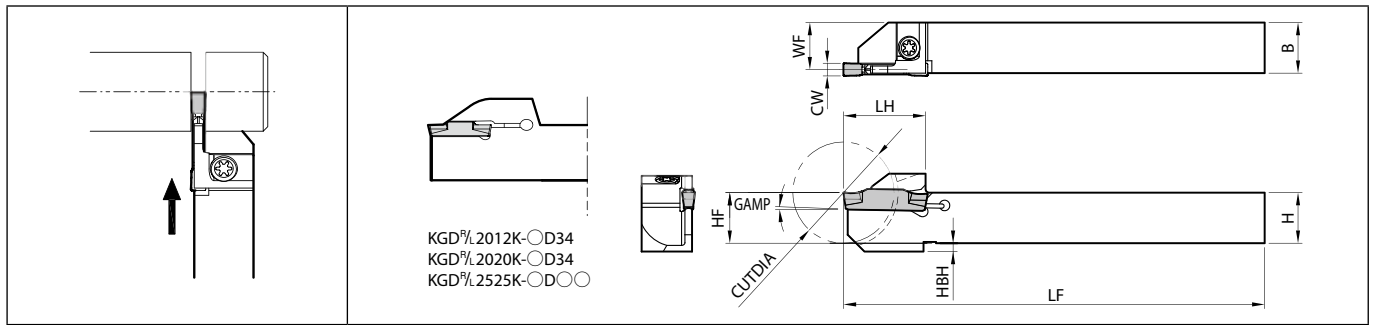

Right-hand shown

Toolholder dimensions


Description	Availability		Dimension (mm)											Angle (°)	Spare parts					Applicable inserts 🔧 G30~G33
															Clamp bolt	Screw	Screw	Wrench	Wrench	
	R	L	CUTDIA	H	B	LH	HF	HBH	LF	WF	CW min.	CW max.	GAMP							
KGD% 1010JX-2 1212F-2 1212JX-2 1616JX-2 2012K-2D34 2020K-2D34 2525K-2D34	●	●	20	10	10	18	10	2	120	9.2	2	3	1	-	SB-40120TR	-	LTW-15S	GD..2020... GD..2220... GD..2420... GD..2520... GD..3020...		
	●	●	24	12	12	19.5	12		85	11.2									120	15.2
	●	●	32	16	16	24.5	16	-	120	11.2	0	HH5X16	-	LW-4	-					
	●	●	34	20	12	20	125		19.2	24.2										
	●	●		20	12	20	125	19.2	24.2											
	●	●	20	12	12	19.5	12	85	11	120	15	2.4	3	1	-	SB-40120TR	-		LTW-15S	
	●	●	24	12	12	19.5	12	85	11	120	15	2.4	3	1	-	SB-40120TR	-		LTW-15S	
KGD% 1010JX-2.4 1212F-2.4 1212JX-2.4 1616JX-2.4 2012K-2.4D34 2020K-2.4D34 2525K-2.4D34	●	●	20	10	10	18	10	2	120	9	2.4	3	1	-	SB-40120TR	-	LTW-15S	GD..2420... GD..2520... GD..3020...		
	●	●	24	12	12	19.5	12		85	11									120	15
	●	●	32	16	16	24.5	16	-	120	11	0	HH5X16	-	LW-4	-					
	●	●	34	20	12	20	125		19	24										
	●	●		20	12	20	125	19	24											
	●	●	20	12	12	19.5	12	85	11	120	15	2.4	3	1	-	SB-40120TR	-		LTW-15S	
	●	●	24	12	12	19.5	12	85	11	120	15	2.4	3	1	-	SB-40120TR	-		LTW-15S	
KGD% 1212JX-3 1616JX-3 1616JX-3D38 1913K-3D38 2012JX-3D42 2012JX-3D51 2020JX-3D42 2020JX-3D51 2525K-3D51	●	●	24	12	12	19.5	12	2	120	10.8	3	3	1	-	SB-40120TR	-	LTW-15S	GD..3020...		
	●	●	32	16	16	24.5	16	-	120	14.8	3	4	1	-	SB-40120TR	-	LTW-15S	GD..3020... GD..3520... GD..4020...		
	●	●	38	19	13	29	19		125	11.8									120	18.8
	●	●	42	20	12	31	20	-	120	10.8	0	HH5X16	-	SE-50125TR	-	LTW-20				
	●	●	51		36	120			18.8											
	●	●	42	20	31	120	18.8													
	●	●	51	25	25	41.5	25	125	23.8	0	HH5X16	-	LW-4	-						
	●	●	51	25	25	41.5	25	125	23.8	0	HH5X16	-	LW-4	-						
	●	●	51	25	25	41.5	25	125	23.8	0	HH5X16	-	LW-4	-						
●	●	51	25	25	41.5	25	125	23.8	0	HH5X16	-	LW-4	-							

4mm width Insert cannot be installed in KGD% 1212JX-3

Recommended tightening torque of clamp screw : 2.0N·m (SB-40120TR), 2.5N·m (SE-50125TR), 6.5N·m (HH5X16)

When machining the material greater than ø36 mm with KGD% 1616JX-3D38, KGD% 1913K-3D38 and KGD% 2012JX-3D51 toolholders, please use 1-edge inserts.

Maximum cutting diameter for 2-edge inserts is ø36 mm.

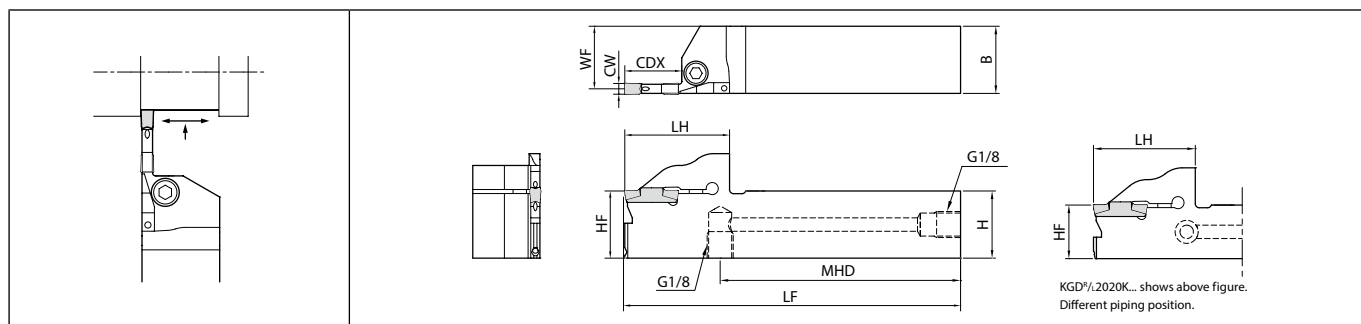
KGD-JCT (External grooving, Coolant-through holder)

Right-hand shown | Pressure Resistance : ~15MPa

Toolholder dimensions


Description	Availability		Dimension (mm)										Coolant hole	Spare parts			Applicable inserts G30~G33
														Clamp bolt	Plug	Wrench	
	R	L	CDX	H	B	LH	MHD	HF	LF	WF	CW min.	CW max.					
KGD%/ 2020K-3T06JCT	●	●	6	20	20	31.5	96.2	20	125	18.8	3	4	Yes	HH5X16	HSG1/8X8.0	LW-4	GD..3020... GD..3520... GD..4020...
2525K-3T06JCT	●	●		25	25		96.5	25		23.8				HH5X25			
KGD%/ 2020K-3T10JCT	●	●	10	20	20	34	94.2	20	125	18.8	3	4	Yes	HH5X16	HSG1/8X8.0	LW-4	
2525K-3T10JCT	●	●		25	25		94.5	25		23.8				HH5X25			
KGD%/ 2020K-3T20JCT	●	●	20	20	20	38	90.2	20	125	18.8	3	4	Yes	HH5X16	HSG1/8X8.0	LW-4	GD..4020... GD..5020...
2525K-3T20JCT	●	●		25	25	39	89.5	25		23.8				HH5X25			
KGD%/ 2020K-4T10JCT	●	●	10	20	20	34	94.2	20	125	18.3	4	5	Yes	HH5X16	HSG1/8X8.0	LW-4	
2525K-4T10JCT	●	●		25	25		94.5	25		23.3				HH5X25			
KGD%/ 2020K-4T20JCT	●	●	20	20	20	38	90.2	20	125	18.3	4	5	Yes	HH5X16	HSG1/8X8.0	LW-4	GD..4020... GD..5020...
2525K-4T20JCT	●	●		25	25	39	89.5	25		23.3				HH5X25			
KGD%/ 2525K-4T25JCT	●	●	25	25	25	44	84.5	25	125	23.3	4	5	Yes	HH5X25	HSG1/8X8.0	LW-4	

Toolholder identification system

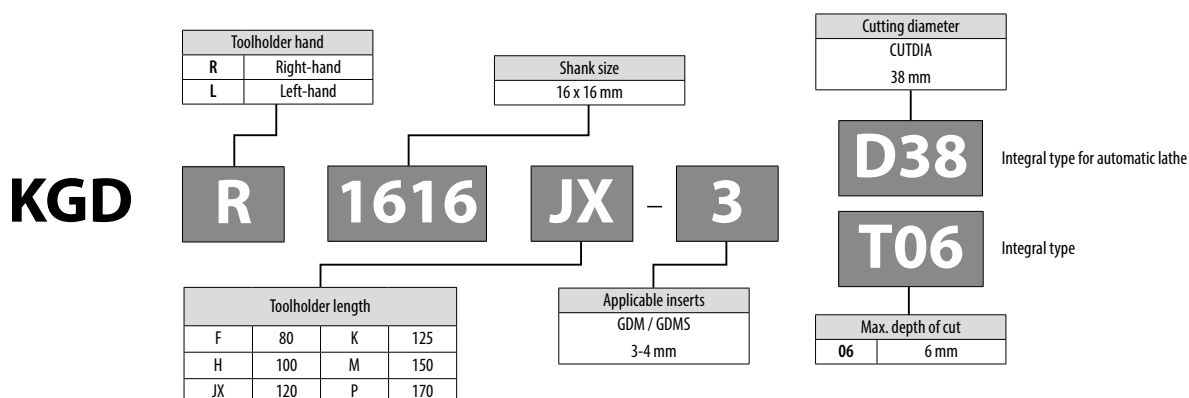


● : Standard item

Easy connection with high pressure hose and joint

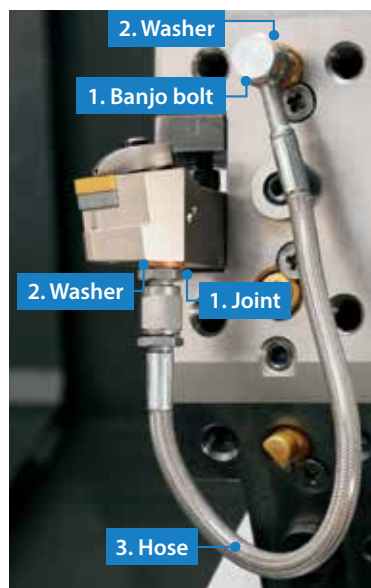

- Even without a high pressure pump, internal coolant can be used at a normal pressure
- Banjo bolt available for angled hose connection. Can be used in a variety of machines

Piping installation guide

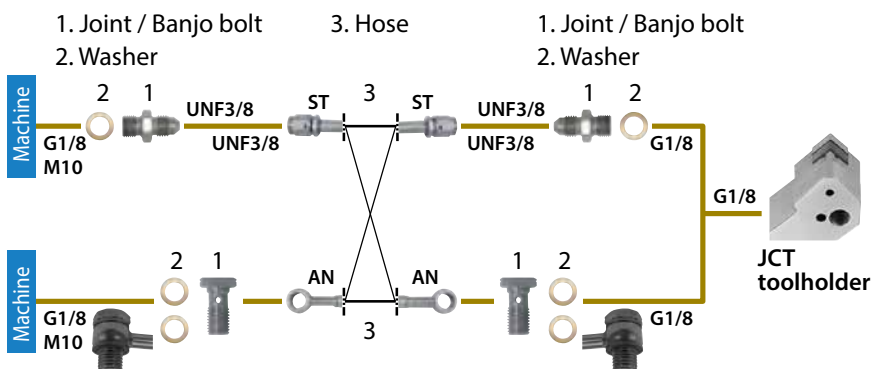

Piping parts

Optional piping parts available (sold separately)

Choose from parts below to match your machine specifications

1. Joint / Banjo bolt × 2 2. Washer × 2-4 3. Hose × 1

1. Joint / Banjo bolt

Applicable pressure: ~ 30 MPa

Shape	Description	Availability	Thread standard
			Thread connection to the machine
	J-G1/8-UNF3/8	●	G1/8
	J-M10X1.5-UNF3/8	●	M10X1.5
	BB-G1/8	●	G1/8
	BB-M10X1.5	●	M10X1.5

2. Washer

Applicable pressure: ~ 30 MPa

Shape	Description	Availability
	WS-10	●

* Use 2 washers for a banjo bolt

3. Hose

Applicable pressure: ~ 30 MPa

Shape	Description	Availability	Thread standard		Dimensions (mm)
					L
	HS-ST-ST-200	●	UNF3/8	UNF3/8	200
	HS-ST-ST-250	●			250
	HS-ST-AN-200	●	UNF3/8	Banjo bolt	200
	HS-ST-AN-250	●			250
	HS-AN-AN-200	●	Banjo bolt	Banjo bolt	200
	HS-AN-AN-250	●			250

Precautions

1. Make sure machine door is completely closed before use of these parts.
2. Use appropriate seal for the male thread of the piping parts and make sure the connection is secure. Use plugs to seal off unused coolant holes.
3. Connect and fasten the coolant hose firmly.
4. The use of copper washers may cause leakage but will have no effect on the performance.
5. Commercial piping parts can be used if the thread standards are same. Check the applicable pressure before use.
6. Regularly changing the coolant filter is recommended.

● : Standard item

KGD-JCTM (for automatic lathe)

Cut-off holders for high pressure coolant with long tool life

The optimized coolant hole position effectively cools the cutting edge

1 Optimized coolant hole position

2 Discharge coolant towards the flank face of the insert

G


Coolant discharging

KGD-JCTM

Sufficient cooling towards the cutting edge

Competitor A

Coolant does not flow directly towards the cutting edge

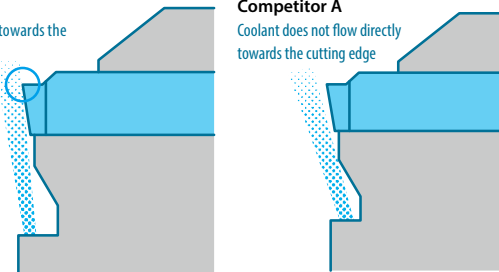

Effective cooling of the cutting edge

Applicable to Different Supply Styles. 2 Supports Internal Coolant with/without Piping System

Internal Coolant without Piping

***When the tool turret supports direct coolant**

Coolant is supplied directly from tool turret into the holder. No need for piping just by installing tools

Applicable to Wide Range of Machines

The tool turret is optional. Please contact our company sales representative for details.

CITIZEN MACHINERY CO., LTD. (L20, D25, M32)

STAR MICRONICS CO., LTD. (SB-R series, SR series, SV series)

TSUGAMI CORPORATION (S205/206-II □ 16 type, S205A/206A-II □ 16 type)

Compatible with various machine including the above. Toolholders can be customized as well.

(Random order)
Based on Kyocera Survey in January 2021



Point


Appropriate hole design to reduce energy loss based on deep analysis


Analysis Image (Internal evaluation)

High

Flow velocity

Low



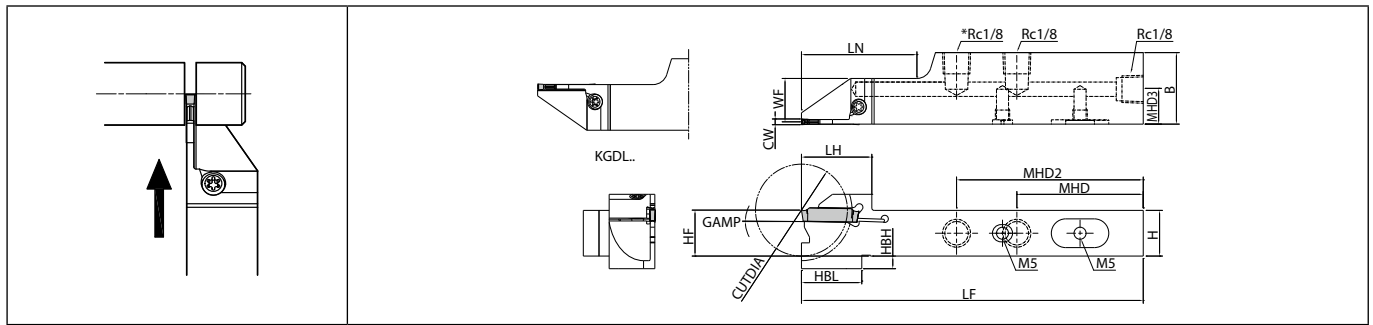
KGD-JCTM (External grooving, Coolant-through holder)Right-hand shown | KGD[®]/L12-JCTM : 2-Rc1/8

Toolholder dimensions

Description		Availabi- lity		Dimension (mm)														Angle (°)	Coolant hole	Applicable inserts 🔵 G30~G33		
		R	L	CUTDIA	H	B	LH	MHD	MHD2	MHD3	HF	HBH	HBL	LF	LN	WF	CW min.	CW max.			GAMP	
KGDR	1218JX-2JCTM	●		24	12	18	19.5	54	-	8.4	12	8.5	21	120	44	11.2	2	3	1	Yes	GD..2020... GD..2220... GD..2420... GD..2520... GD..3020...	
KGDL	1218JX-2JCTM		●																			
KGDR	1625JX-2JCTM	●		32	16	25	24.5	44	65	12.2	16	4.5	21	120	40	15.2						GD..2420... GD..2520... GD..3020...
KGDL	1625JX-2JCTM		●																			
KGDR	1218JX-2.4JCTM	●		24	12	18	19.5	54	-	8.4	12	8.5	21	120	44	11	2.4	3	1	Yes	GD..2420... GD..2520... GD..3020...	
KGDL	1218JX-2.4JCTM		●																			
KGDR	1625JX-2.4JCTM	●		32	16	25	24.5	44	65	12.2	16	4.5	21	120	40	15						GD..3020... GD..3520... GD..4020...
KGDL	1625JX-2.4JCTM		●																			
KGDR	1218JX-3JCTM	●		24	12	18	19.5	54	-	8.6	12	8.5	21	120	44	10.8	3	3	1	Yes	GD..3020... GD..3520... GD..4020...	
KGDL	1218JX-3JCTM		●																			
KGDR	1625JX-3JCTM	●		32	16	25	24.5	44	65	12.2	16	4.5	21	120	40	14.8	3	4				GD..3020... GD..3520... GD..4020...
KGDL	1625JX-3JCTM		●																			

Description	Spare parts			
	Plug	Plug	Screw	Wrench
KGDR 1218JX-2JCTM	GP-1	HS5X4LP	SB-40120TR	LTW-155
KGDL 1218JX-2JCTM				
KGDR 1625JX-2JCTM	GP-1	HS5X4LP	SB-40120TR	LTW-155
KGDL 1625JX-2JCTM				
KGDR 1218JX-2.4JCTM	GP-1	HS5X4LP	SB-40120TR	LTW-155
KGDL 1218JX-2.4JCTM				
KGDR 1625JX-2.4JCTM	GP-1	HS5X4LP	SB-40120TR	LTW-155
KGDL 1625JX-2.4JCTM				
KGDR 1218JX-3JCTM	GP-1	HS5X4LP	SB-40120TR	LTW-155
KGDL 1218JX-3JCTM				
KGDR 1625JX-3JCTM	GP-1	HS5X4LP	SB-40120TR	LTW-155
KGDL 1625JX-3JCTM				

● : Standard item

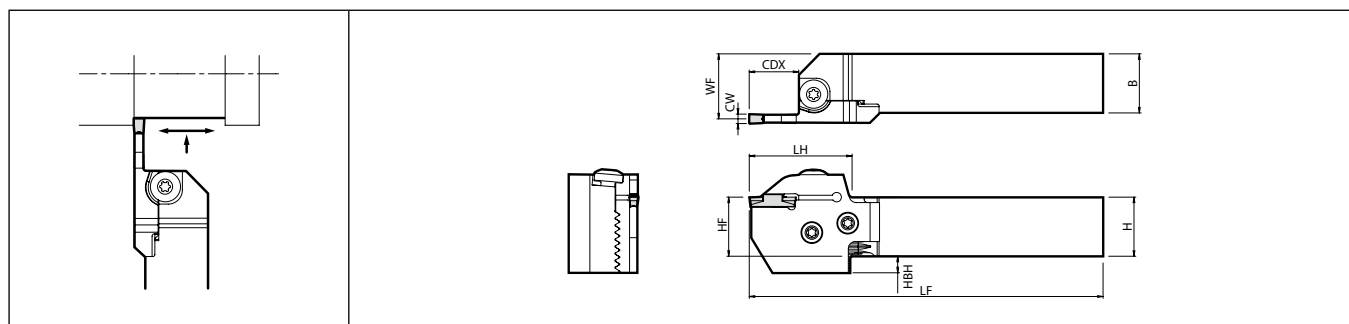KGD-S (External grooving / 0° separate type)

Right-hand shown (Right-hand blade and right-hand toolholder)

Toolholder dimensions (Blade and toolholder)

Shank angle	Width (mm)	Max. depth of cut (mm)	Shank size (mm)	Unit description	Availability		Blade description G42	Toolholder description G42	Dimension (mm)										Spare parts					
					R	L			CDX	H	B	LH	HF	HBH	LF	WF	CW min.	CW max.	Clamp bolt (for insert clamp)	Screw (for blade)	Wrench			
0°	2	17	☐ 20	KGD%L 2020X-2T17S	●		KGD%L-2T17-C	KGD%L 2020-C	17	20	20		20	12	122	23.4	2	3						
			☐ 25	2525X-2T17S	●	●		KGD%L 2525-C		25	25	40	25	7	147	28.4								
			☐ 32	No unit description ⇨						KGD%L 3232-C	32	32		32	-	167						35.4		
	3	10	☐ 20	KGD%L 2020X-3T10S	●		KGD%L-3T10-C	KGD%L 2020-C	10	20	20		20	12	115	23						3	4	
			☐ 25	2525X-3T10S	●			KGD%L 2525-C		25	25	33	25	7	140	28								
			☐ 32	No unit description ⇨						KGD%L 3232-C	32	32		32	-	160								35
		20	☐ 20	KGD%L 2020X-3T20S	●	●	KGD%L-3T20-C	KGD%L 2020-C	20	20	20		20	12	125	23								
			☐ 25	2525X-3T20S	●	●		KGD%L 2525-C		25	25	43	25	7	150	28								
			☐ 32	3232X-3T20S	●			KGD%L 3232-C		32	32		32	-	170	35								
	4	10	☐ 20	KGD%L 2020X-4T10S	●		KGD%L-4T10-C	KGD%L 2020-C	10	20	20		20	12	115	22.5						4	5	
			☐ 25	2525X-4T10S	●			KGD%L 2525-C		25	25	33	25	7	140	27.5								
			☐ 32	No unit description ⇨						KGD%L 3232-C	32	32		32	-	160								34.5
		20	☐ 20	KGD%L 2020X-4T20S	●		KGD%L-4T20-C	KGD%L 2020-C	20	20	20		20	12	125	22.5								
			☐ 25	2525X-4T20S	●	●		KGD%L 2525-C		25	25	43	25	7	150	27.5								
			☐ 32	3232X-4T20S	●			KGD%L 3232-C		32	32		32	-	170	34.5								
		25	☐ 20	KGD%L 2020X-4T25S	●	●	KGD%L-4T25-C	KGD%L 2020-C	25	20	20		20	12	130	22.5								
			☐ 25	2525X-4T25S	●	●		KGD%L 2525-C		25	25	48	25	7	155	27.5								
			☐ 32	3232X-4T25S	●			KGD%L 3232-C		32	32		32	-	175	34.5								
	5	10	☐ 20	KGD%L 2020X-5T10S	●	●	KGD%L-5T10-C	KGD%L 2020-C	10	20	20		20	12	115	22						5	6	
			☐ 25	2525X-5T10S	●			KGD%L 2525-C		25	25	33	25	7	140	27								
			☐ 32	No unit description ⇨						KGD%L 3232-C	32	32		32	-	160								34
		25	☐ 20	No unit description ⇨					KGD%L 2020-C	25	20	20		20	12	130								22
			☐ 25	KGD%L 2525X-5T25S	●	●	KGD%L 2525-C	25	25		48	25	7	155	27									
			☐ 32	3232X-5T25S	●		KGD%L 3232-C	32	32			32	-	175	34									

1. When using the toolholder in normal mounting position, the lower jaw of toolholder may interfere with the tool presetter.

2. The toolholder and blade descriptions are printed on the toolholder body. (Unit description is not printed.)

KGD-S: Right-hand blade for right-hand toolholder, left-hand blade for left-hand toolholder.

The toolholder is applicable for all blade with suitable hand.


3. When the unit description is not available (No unit description) and/or if stock status is blank, please purchase toolholder and blade separately.

4. CDX: Maximum depth to which processing can be made. (If the CDX is 20 mm or more, the maximum groove-depth of groove made by the 2-edge insert will be 18 mm.)

Above toolholders are applicable to Cut-off, too.

Applicable inserts G30~G33

● : Standard item

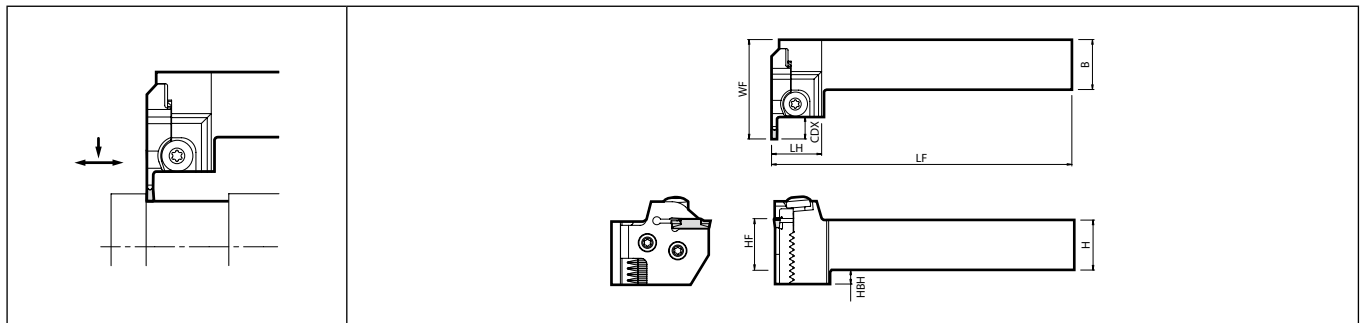KGDS-S (External grooving / 90° separate type)

Right-hand shown (Left-hand blade and right-hand toolholder)

Toolholder dimensions (Blade and toolholder)

Shank angle	Width (mm)	Max. depth of cut (mm)	Shank size (mm)	Blade description ➡ G42	Toolholder description ➡ G42	Unit description	Availability		Dimension (mm)										Spare parts										
							R	L	CDX	H	B	LH	HF	HBH	LF	WF	CW min.	CW max.											
																						Clamp bolt (for insert clamp)	Screw (for blade)	Wrench					
90°	2	17	 	KGDS% _R -2T17-C	KGDS% _L 2020-C KGDS% _L 2525-C	- -			17	20 25	20 25	27.7	20 25	12 7	125 150	56.7	2	3	BH6X10TR	SB-60120TR	LTW-25								
	3	10	 	KGDS% _R -3T10-C	KGDS% _L 2020-C KGDS% _L 2525-C	KGDS% _L 2020X-3T10S 2525X-3T10S	● ●	● ●	10	20 25	20 25		20 25	12 7	125 150	49.7	3	4											
		20	 	KGDS% _R -3T20-C	KGDS% _L 2020-C KGDS% _L 2525-C	- -			20	20 25	20 25		20 25	12 7	125 150	59.7													
		4	10	 	KGDS% _R -4T10-C	KGDS% _L 2020-C KGDS% _L 2525-C	- -			10	20 25		20 25	27.7	20 25	12 7	125 150	49.7				4	5						
			20	 	KGDS% _R -4T20-C	KGDS% _L 2020-C KGDS% _L 2525-C	- -			20	20 25		20 25		20 25	12 7	125 150	59.7											
	25		 	KGDS% _R -4T25-C	KGDS% _L 2020-C KGDS% _L 2525-C	- -			25	20 25	20 25		20 25		12 7	125 150	64.7												
	5		10	 	KGDS% _R -5T10-C	KGDS% _L 2020-C KGDS% _L 2525-C	- -			10	20 25		20 25		27.7	20 25	12 7	125 150						49.7	5	6			
			25	 	KGDS% _R -5T25-C	KGDS% _L 2020-C KGDS% _L 2525-C	- -			25	20 25		20 25			20 25	12 7	125 150						64.7					

1. When using the toolholder in normal mounting position, the lower jaw of toolholder may interfere with the tool presetter.

2. The toolholder and blade descriptions are printed on the toolholder body. (Unit description is not printed.)


KGDS-S : Left-hand Blade for Right-hand Toolholder, Right-hand Blade for Left-hand Toolholder.

The toolholder is applicable for all blade with suitable hand.

3. CDX : Maximum depth to which processing can be made. (If the CDX is 20 mm or more, the maximum groove-depth of groove made by the 2-edge insert will be 18 mm.)

Applicable inserts ➡ G30~G33

Toolholder identification system

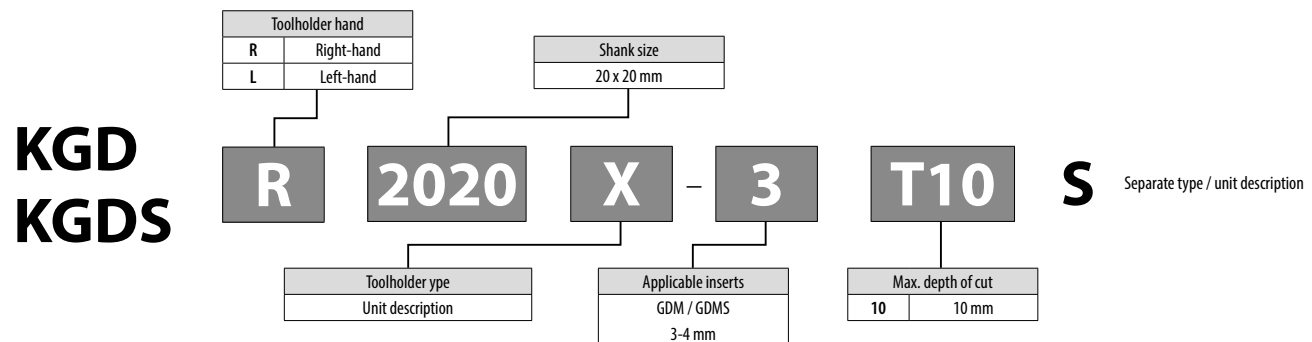


● : Standard item




Toolholder dimensions (Blade and toolholder)

KGD-C (0° Separate Type)

Drawing of 0° type Right-hand shown	Toolholder description	Availability		Dimension (mm)		
		R	L	L	B	H
	KGD [®] /L 2020-C	●	●	104	20	20
	2525-C	●	●	129	25	25
	3232-C	●	●	149	32	32

G

KGDS-C (90° Separate Type)

Drawing of 90° type Right-hand shown	Toolholder description	Availability		Dimension (mm)		
		R	L	L	B	H
	KGDS [®] /L 2020-C	●	●	122	20	20
	2525-C	●	●	147	25	25


Grooving

External

Internal

Face

Blade

Drawing of blade Right-hand shown	Blade description	Availability		Dimension (mm)		
		R	L	L	T	A
	KGD [®] /L -2T17-C	●	●	51.2	17.2	1.7
	-3T10-C	●	●	44.2	10.2	2.4
	-3T20-C	●	●	53.2	20.2	2.4
	-4T10-C	●	●	44.2	10.2	3.4
	-4T20-C	●	●	54.2	20.2	3.4
	-4T25-C	●	●	59.2	25.2	3.4
	-5T10-C	●	●	44.2	10.2	4.4
	-5T25-C	●	●	59.2	25.2	4.4


Spare parts

Unit description	Spare parts		
	Clamp bolt (for insert clamp)	Screw (for blade)	Wrench
			
KGD [®] /L ...S KGDS [®] /L ...S	BH6X10TR	SB-60120TR	LTW-25

● : Standard item


Setting the inserts

1. Use compressed air or other measures to remove chips from the insert mounting part (Ref. to Fig. 1).
2. Put the insert into the toolholder and push it makes contact with the back end of toolholder's surface (Ref. to Fig. 1 and 2).
3. Keeping the insert fit to the surface, tighten the insert clamp screw at an appropriate torque.
4. Make sure that there is no gap between the insert and the back end of the toolholder's surface and that the insert is set straight (Ref. to Fig. 2 and 3).

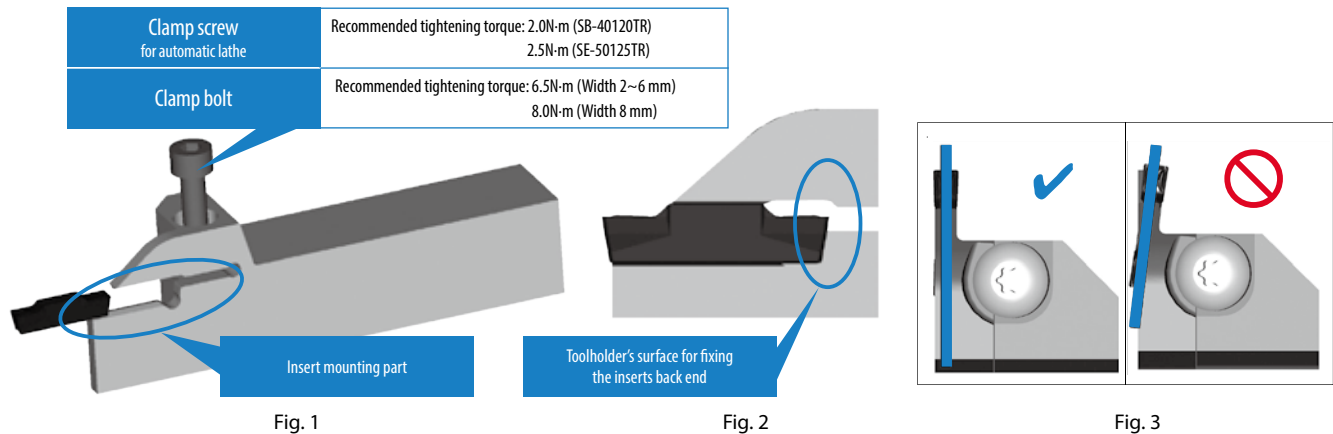


Setting the blade (Separate type toolholder)

1. Use compressed air or other measures to remove chips and dust from the serration part (Ref. to Fig. 1).
 2. Mate and fit the serrations of the blade and toolholder, and also fit the blade end to the toolholder. (Ref. to Fig. 2)
 3. Tighten the blade fixing screws at an appropriate torque. You can tighten them in any order. (Ref. to Fig. 2)
- Recommended tightening torque : 8N·m
4. Set the insert after setting the blade.

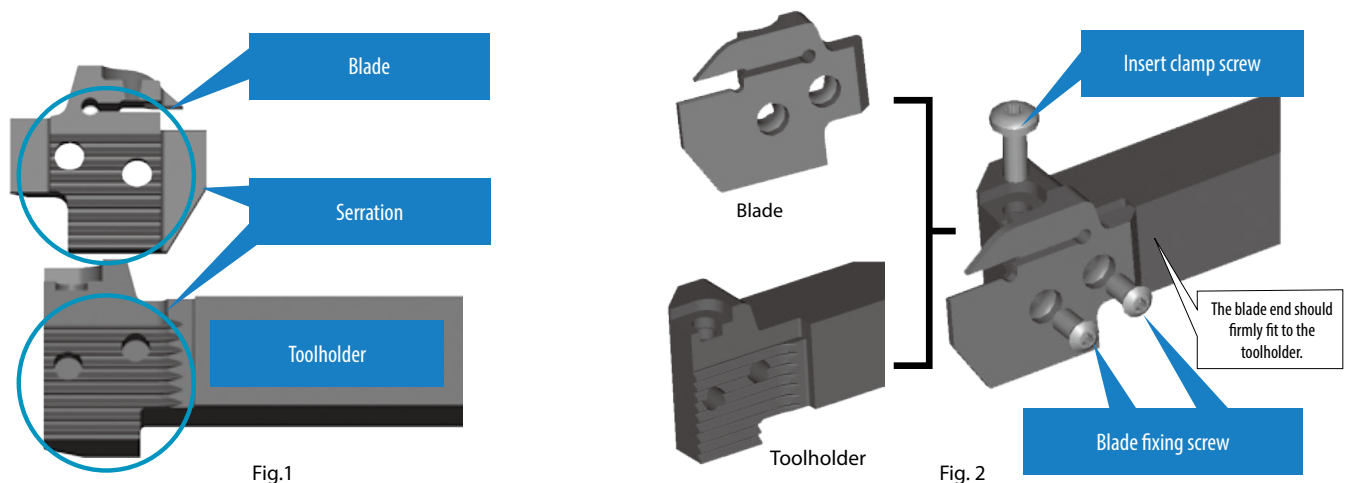

Separate type toolholder identification system and their setting to lathe

Firmly fit the lower jaw to the tool post of the lathe.

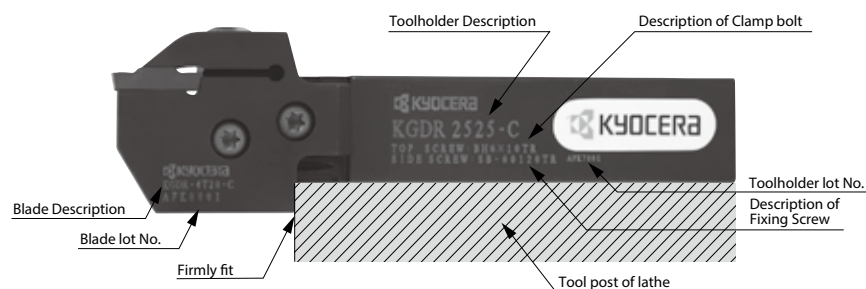


Recommended cutting conditions (cutting speed V_c)

Workpiece material	Chipbreaker	Recommended insert grades (V_c : m/min)										Remarks
		Cermet		MEGACOAT NANO	MEGACOAT		DLC	Carbide	MEGACOAT CBN	CBN	PCD	
		TN620	TN90	PR1535	PR1225	PR1215	PDL015	GW15	KBN05M	KBN570	KPD001	
Carbon steel	GM	☆ 80~220	☆ 100~220	☆ 80~200	★ 80~200	☆ 100~200	-	-	-	-	-	Coolant
Alloy steel	GL	☆ 70~200	☆ 80~200	☆ 70~180	★ 70~180	☆ 80~180	-	-	-	-	-	
Stainless steel	CM	-	-	★ 60~150	☆ 60~150	☆ 60~150	-	-	-	-	-	
Cast iron	PH	-	-	-	-	-	-	-	-	-	-	
Aluminum	GS	-	-	-	-	★ 100~200	-	-	-	-	-	
Brass	AM	-	-	-	-	-	★ 200~500	☆ 200~450	-	-	★ 150~2,000	
Hard materials	NB	-	-	-	-	-	-	-	★ 80~150	-	-	
Sintered steel	NB	-	-	-	-	-	-	-	-	★ 100~250	-	

★:1st recommendation ☆:2nd recommendation

Recommended cutting conditions (feed rate / a_p)


Workpiece material: S50C

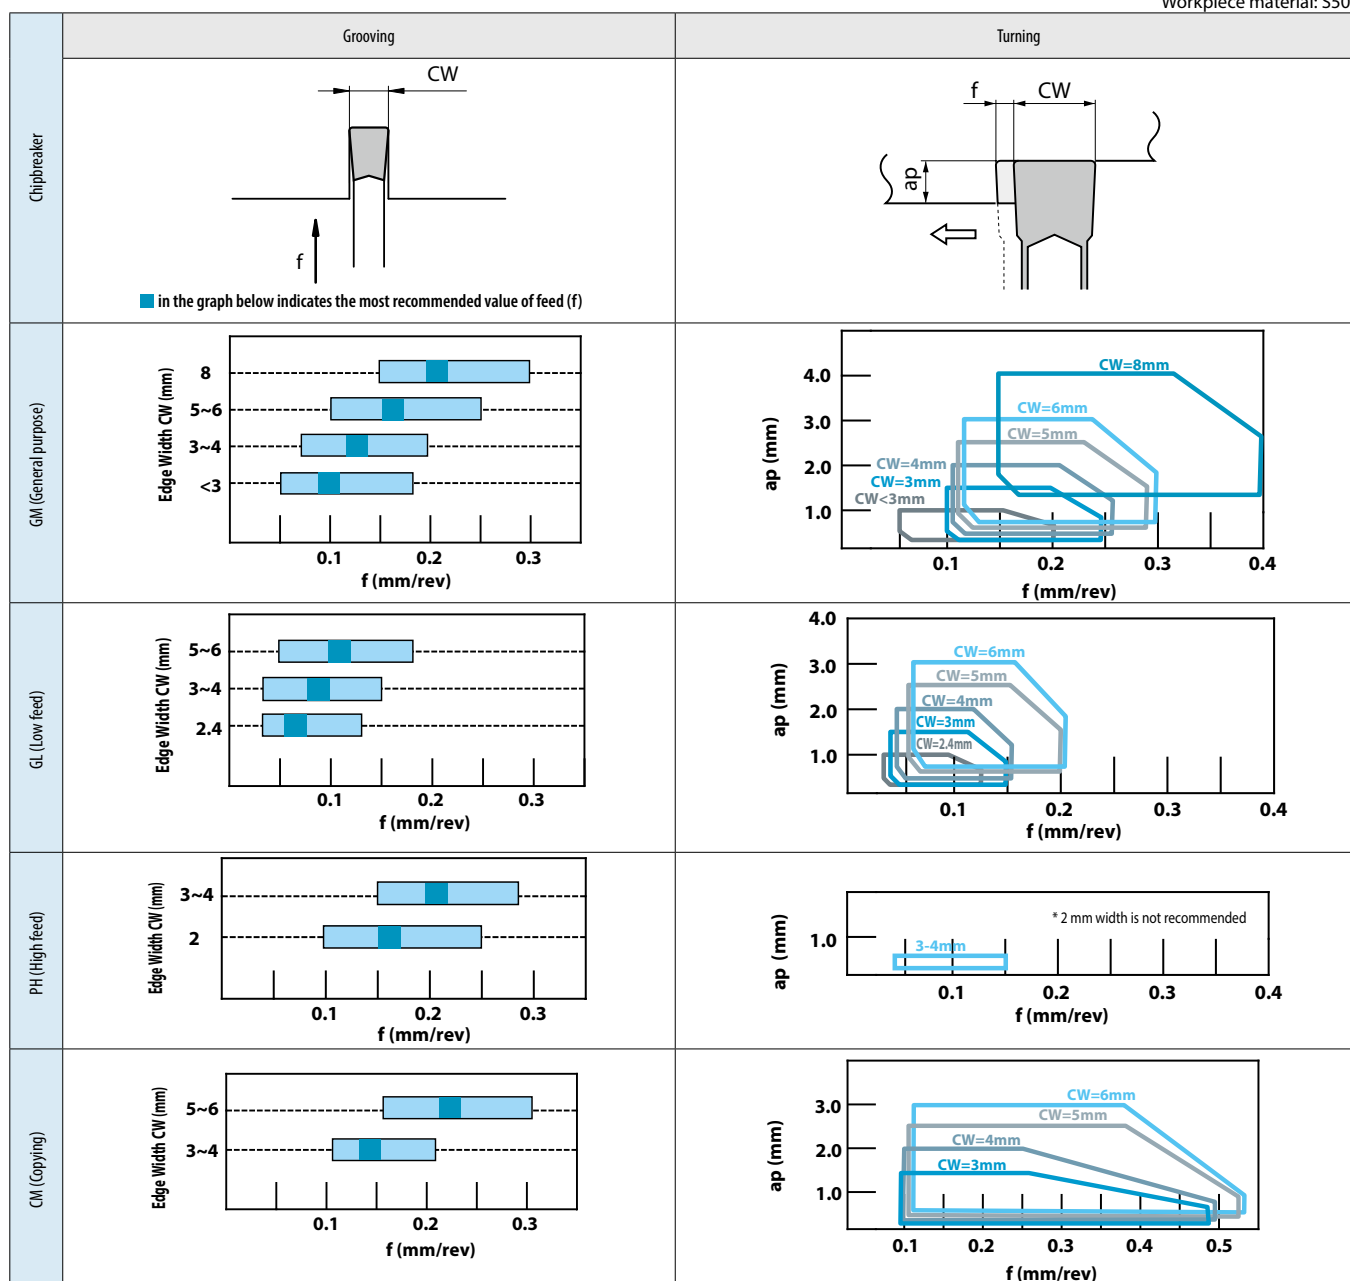



Note 1. The above values are based on the condition that CDX of toolholder is 17 mm or less.

2. If the toolholder is not for the 8 mm width insert and its dimension CDX is over 17 mm, set the values for turning to 90% or less of those above.

Recommended cutting conditions (feed rate / ap)

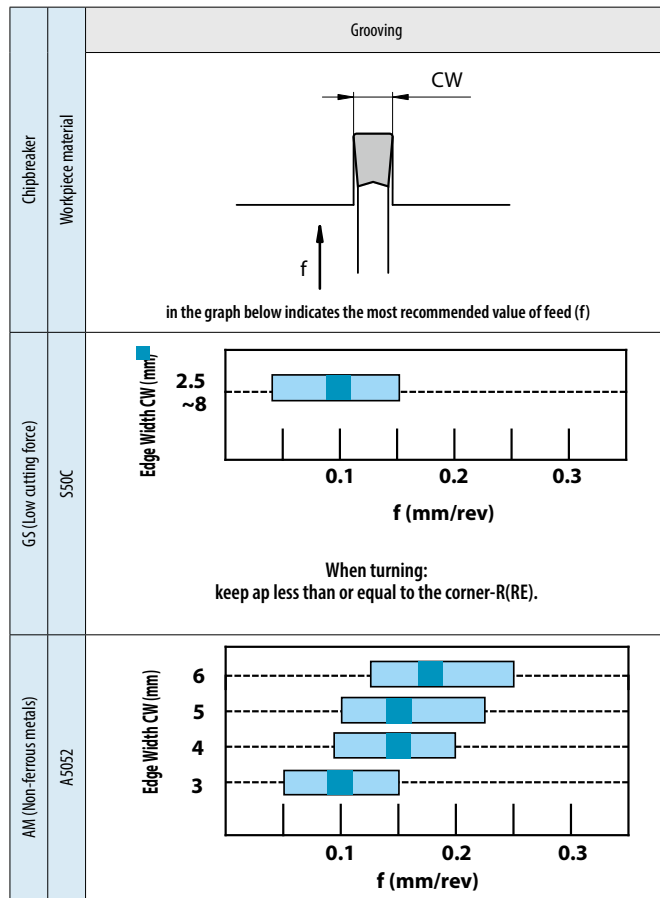


Note 1. The above values are based on the condition that CDX of toolholder is 17 mm or less.

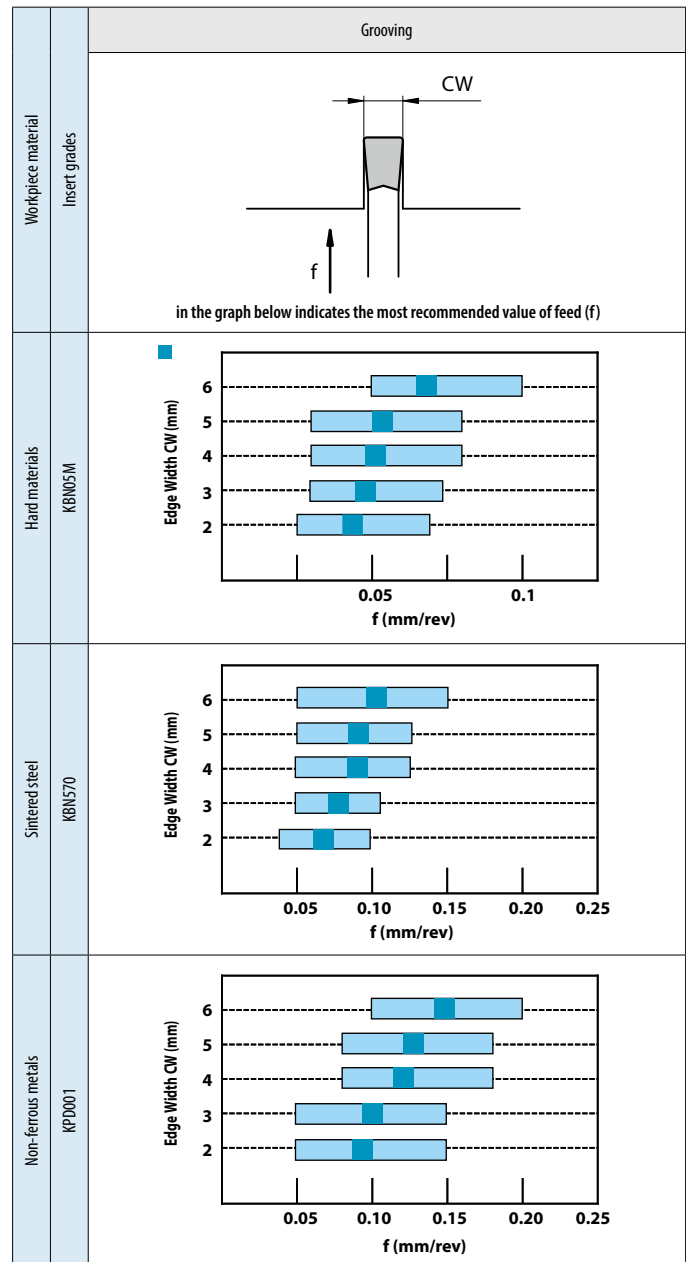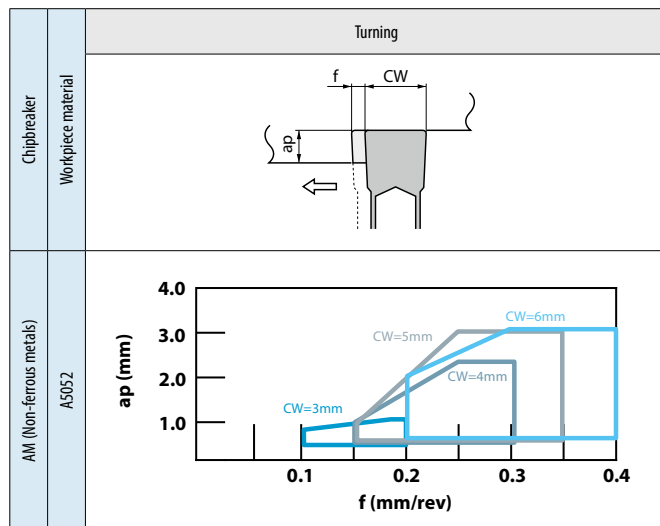

CM chipbreaker [Cutting amount (ap) in back copying]

Maximum ap in back copying

Description	Maximum ap (mm)				
	Toolholder description				
	KGD...-2T...	KGD...-3T...	KGD...-4T...	KGD...-5T...	KGD...-6T...
GDM 3020N-150R-CM	0.24	0.20	-	-	-
4020N-200R-CM	-	0.24	0.20	-	-
5020N-250R-CM	-	-	0.30	0.20	-
6020N-300R-CM	-	-	-	0.30	0.25

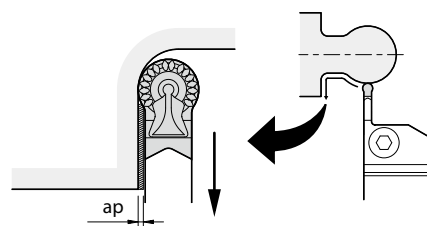

Guide for external grooving

Point 1 - Turning after grooving

1. Grooving depth over 0.5 mm: For roughing - refer to fig. 1

Before turning, pull the tool back about 0.1 mm after grooving, instead of turning subsequent to grooving.

Failure to pull the tool back before traverse machining will result in an unbalanced load applied on only one side of the cutting edge.

2. Grooving depth under 0.5 mm: For finishing - refer to fig. 2

Turning subsequent to grooving is possible because shallow groove depths relate a small load on the cutting edge.

Retention time is not necessary.

Point 2

1. When widening the groove width (Refer to Fig.3), apply the "Step Turning."

2. The widened groove and side walls should be finished last. For better chip control, ap over 0.5 mm is recommended. Note: If the workpiece is not supported at the center, reduce the feed rate when grooving towards center.

G

Grooving

External

Internal

Face




Fig. 1

Before turning, pull the tool back about 0.1 mm after grooving.
Grooving depth over 0.5 mm: At roughing




Fig. 2

Turning subsequent to grooving.
Grooving depth under 0.5 mm: At finishing




Fig. 3

Case Studies

SCr420H (Grooving)	
Gear $V_c = 113 \sim 164 \text{ m/min}$ $f = 0.06 \text{ mm/rev}$ Wet GDM4020N-040GM (PR1225) KGDL2525X-3T10S	
GM chipbreaker (PR1225)	1,500 pcs/c
Competitor K (PVD coated carbide)	250 pcs/c
• GM chipbreaker (PR1225) showed 6 times longer tool life than that of Competitor K. • Good chip control without burned chips. GM chipbreaker Competitor K	

Evaluation by the user




SCM420 (Grooving / Turning)	
Gear $V_c = 170 \text{ m/min}$ $f = 0.15 \text{ mm/rev}$ (Roughing) 0.10 mm/rev (Finishing) $a_p = 0.2 \text{ mm}$ (Finishing) Wet GDM4020N-040GM (PR1215) KGDR2525X-4T20S	
GM chipbreaker (PR1215)	250 pcs/c
Competitor L (Roughing: PVD coated carbide; Finishing: cermet)	200 pcs/c
• GM chipbreaker reduced occurrence rate of tangle of chips (occurrence rate 80% to 10%). The problem was persistent with Competitor L. • Machining productivity is improved. GM Chipbreaker (Finishing) Smooth chip control Competitor L (Finishing) Chips easily tangled	

Evaluation by the user



Grooving

GM/GMN/GMM/GMG/GMGA/FGG

		Carbon steel / Alloy steel												P				
		Stainless steel												M				
		Cast iron												K				
		Non-ferrous metals												N				
		Titanium alloy												S				
		Hard materials (~ 40HRC)												H				
		Hard materials (40HRC ~)																
Insert		Description		No. of edges	Dimension (mm)				Tolerance (mm)		Carbide				Cermat	Applicable toolholder ➔ G55~G58 G95		
					CW	S	RE	INSL	CW min.	CW max.	CVD		PVD				-	-
											CP9025	PR905	PR915	PR930				
	 Chip control oriented / M class	GMM 2420-020MW	2	2.4	4.3	0.2	20	-0.05	+0.05								KGM...2.5(...) KGM...2(...)	
		GMM 3020-020MW 3020-040MW	2	3	4.3	0.2 0.4	20	-0.05	+0.05								KGM...3(...) KGM...2.5(...) KGM...2(...)	
		GMM 4020-020MW 4020-040MW 4020-080MW	2	4	4.3	0.2 0.4 0.8	20	-0.05	+0.05								KGM...4(...) KGM...3(...)	
		GMM 5020-040MW 5020-080MW	2	5	4.3	0.4 0.8	20	-0.05	+0.05								KGM...5(...) KGM...4(...)	
		GMM 6020-040MW 6020-080MW	2	6	4.3	0.4 0.8	20	-0.05	+0.05								KGMR...6T30 KGM...5(...)	
		GMM 8030-080MW	2	8	5.5	0.8	30	-0.05	+0.05								KGM [®] /L 2525M-8 KIGM...6540B-8 KFMS...-8	
	 Sharp cutting oriented / M class	GMM 3020-020MS 3020-040MS	2	3	4.3	0.2 0.4	20	-0.05	+0.05								KGM...3(...) KGM...2.5(...) KGM...2(...)	
		GMM 4020-040MS	2	4	4.3	0.4	20	-0.05	+0.05								KGM...4(...) KGM...3(...)	
		GMM 5020-040MS	2	5	4.3	0.4	20	-0.05	+0.05								KGM...5(...) KGM...4(...)	
		GMM 6020-040MS	2	6	4.3	0.4	20	-0.05	+0.05								KGMR...6T30 KGM...5(...)	
	 Sharp cutting oriented / Precision class	GMG 3020-000MS 3020-020MS 3020-040MS	2	3	4.3	0 0.2 0.4	20	-0.02	+0.02								KGM...3(...) KGM...2.5(...) KGM...2(...)	
		GMG 4020-020MS 4020-040MS 4020-080MS	2	4	4.3	0.2 0.4 0.8	20	-0.02	+0.02								KGM...4(...) KGM...3(...)	
		GMG 5020-040MS 5020-080MS	2	5	4.3	0.4 0.8	20	-0.02	+0.02								KGM...5(...) KGM...4(...)	
		GMG 6020-080MS	2	6	4.3	0.8	20	-0.02	+0.02								KGMR...6T30 KGM...5(...)	






Recommended cutting conditions ➡ G143

○ : Will be replaced with a new product

				Carbon steel / Alloy steel								P			
				Stainless steel								M			
				Cast iron								K			
				Non-ferrous metals								N			
				Titanium alloy								S			
				Hard materials (~ 40HRC)								H			
				Hard materials (40HRC ~)											
Insert	Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide					Cermetal	Applicable toolholder G55~G60
			CW	S	RE	INSL	CW min.	CW max.	CVD	PVD	-	-			
													CR9025		
Sharp cutting oriented / Precision class (ground chipbreaker)	GMG 2520-030MG	2	2.5	4.3	0.3	20	- 0.03	+ 0.03							KGM...2.5(...) KGM...2(...)
	GMG 3020-030MG	2	3	4.3	0.3	20	- 0.03	+ 0.03							KGM...3(...) KGM...2.5(...) KGM...2(...)
	GMG 3520-030MG	2	3.5	4.3	0.3	20	- 0.03	+ 0.03							KGM...3(...)
	GMG 4020-040MG	2	4	4.3	0.4	20	- 0.03	+ 0.03							KGM...4(...) KGM...3(...)
	GMG 5020-040MG	2	5	4.3	0.4	20	- 0.03	+ 0.03							KGM...5(...) KGM...4(...)
	GMG 6020-040MG	2	6	4.3	0.4	20	- 0.03	+ 0.03							KGMR...6T30 KGM...5(...)
	GMG 8030-050MG	2	8	5.5	0.5	30	- 0.03	+ 0.03							KGM [®] /L 2525M-8 KIGM.6540B-8 KFMS...8
Chip control oriented / M class / Full R	GMM 3020-150R	2	3	4.3	1.5	20	- 0.05	+ 0.05							KGM...3(...) KGM...2.5(...) KGM...2(...)
	GMM 4020-200R	2	4	4.3	2	20	- 0.05	+ 0.05							KGM...4(...) KGM...3(...)
	GMM 5020-250R	2	5	4.3	2.5	20	- 0.05	+ 0.05							KGM...5(...) KGM...4(...)
	GMM 6020-300R	2	6	4.3	3	20	- 0.05	+ 0.05							KGMR...6T30 KGM...5(...)
Full R / Sharp cutting oriented / Precision class	GMG 3020-150R	2	3	4.3	1.5	20	- 0.02	+ 0.02							KGM...3(...) KGM...2.5(...) KGM...2(...)
	GMG 4020-200R	2	4	4.3	2	20	- 0.02	+ 0.02							KGM...4(...) KGM...3(...)
	GMG 5020-250R	2	5	4.3	2.5	20	- 0.02	+ 0.02							KGM...5(...) KGM...4(...)
Chip control oriented / Undercutting	GMG 3020-150RU	2	3	4.3	1.5	20	- 0.02	+ 0.02							KGM...3(...) KGM...2.5(...) KGM...2(...) KGMUR2525M
	GMG 4020-200RU	2	4	4.3	2	20	- 0.02	+ 0.02							KGM...4(...) KGM...3(...) KGMUR2525M

○: Will be replaced with a new product

GM/GMN/GMM/GMG/GMGA/FGG







			Carbon steel / Alloy steel		Stainless steel		Cast iron		Non-ferrous metals		Titanium alloy		Hard materials (~ 40HRC)		Hard materials (40HRC ~)			
			P		M		K		N		S		H					
Insert		Description		No. of edges	Dimension (mm)				Tolerance (mm)		Carbide			Cemet	Applicable toolholder ➡ G56~G58 G95			
					CW	S	RE	INSL	CW min.	CW max.	CVD G9025	PVD PR930	- KW10			- TN90		
		GMGA	6020-300R	2	6	4.3	3	20	- 0.02	+ 0.02				○		KGM®/L ...5 KGM®/L ...5T		
		GMGA	8030-400R	2	8	5.5	4	30	- 0.02	+ 0.02				○		KGM®/L 2525M-8 KIGM®/L 6540B-8 KIGMUR6540B-8 KFMS...-8		
		GMM	3014-04	2	3	4.3	0.4	14	- 0.05	+ 0.05			○	○	-			
		GMM	3014-15R	2	3	4.3	1.5	14	- 0.05	+ 0.05				○	-			
		FGGR	3020-02	2	3	4.3	0.2	20	- 0.02	+ 0.02	○	○	○		KGMMR2525M-3 KGMSR2525M-3			
		FGGL	3020-02								○	○	○					
		FGGR	4020-04	2	4	4.3	0.4	20	- 0.02	+ 0.02	○	○	○					
		FGGL	4020-04									○	○	○				
		FGGR	5020-04	2	5	4.3	0.4	20	- 0.02	+ 0.02	○	○	○					
		FGGL	5020-04								○	○	○					

Handed insert shows Right-hand

Recommended cutting conditions  G143

○ : Will be replaced with a new product

GM/GMN/GMM/GMG/GMGA/FGG

		Carbon steel / Alloy steel														P	
		Stainless steel														M	
		Cast iron														K	
		Non-ferrous metals														N	
		Titanium alloy														S	
		Hard materials (~ 40HRC)														H	
Hard materials (40HRC ~)																	
Insert	Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide				Cemet	Applicable toolholder ➔ G55~G58			
			CW	S	RE	INSL	CW min.	CW max.	CVD		PVD				-	-	
									CR9025	PR905	PR915	PR930					KW10
	 Sharp cutting oriented	GMM 1520-MT	2	1.5	4.3	0 0.05	20	-0.05	+0.05							KGM...1.5(...)	
		GMM 2020-MT	2	2	4.3	0 0.05	20	-0.05	+0.05							KGM...2(...) KGM...1.5(...)	
		GMM 2520-MT	2	2.5	4.3	0 0.05	20	-0.05	+0.05							KGM...2.5(...) KGM...2(...)	
		GMM 3020-MT	2	3	4.3	0 0.05	20	-0.05	+0.05							KGM...3(...) KGM...2.5(...) KGM...2(...)	
	 Sharp cutting oriented / Without Chipbreaker	GMM 1520-NB	2	1.5	4.3	0	20	-0.05	+0.05							KGM...1.5(...)	
		GMM 2020-NB	2	2	4.3	0	20	-0.05	+0.05							KGM...2(...) KGM...1.5(...)	
		GMM 2520-NB	2	2.5	4.3	0	20	-0.05	+0.05							KGM...2.5(...) KGM...2(...)	
		GMM 3020-NB	2	3	4.3	0	20	-0.05	+0.05							KGM...3(...) KGM...2.5(...) KGM...2(...)	
	 Stability oriented	GMM 2020-TK	2	2	4.3	0.2	20	-0.05	+0.05							KGM...2(...) KGM...1.5(...)	
		GMM 2520-TK	2	2.5	4.3	0.2	20	-0.05	+0.05							KGM...2.5(...) KGM...2(...)	
		GMM 3020-TK	2	3	4.3	0.25	20	-0.05	+0.05							KGM...3(...) KGM...2.5(...) KGM...2(...)	
	 1-edge / Stability oriented	GMN 2-TK	1	2	4.3	0.2	20	-0.05	+0.05							KGM...2(...) KGM...1.5(...)	
		GMN 3-TK	1	3	4.3	0.25	20	-0.05	+0.05							KGM...3(...) KGM...2.5(...) KGM...2(...)	
		GMN 4-TK	1	4	4.3	0.3	20	-0.05	+0.05							KGM...4(...) KGM...3(...)	
	 1-edge	GMN 2.2	1	2.2	4.3	0.17	20	-0.05	+0.05							KGM...2(...)	
		GMN 3	1	3	4.3	0.2	20	-0.05	+0.05								KGM...3(...) KGM...2.5(...) KGM...2(...)
		GMN 4	1	4	4.3	0.25	20	-0.05	+0.05								KGM...4(...) KGM...3(...)
		GMN 5	1	5	4.3	0.8	20	-0.05	+0.05								KGM...5(...) KGM...4(...)
		GMN 6	1	6	4.3	0.8	20	-0.05	+0.05								KGMR...6T30 KGM...5(...)

Handed insert shows Right-hand

Recommended cutting conditions ➡ G143





○ : Will be replaced with a new product

G



Grooving

GM/GMN/GMM/GMG/GMGA/FGG


		Carbon steel / Alloy steel														P				
		Stainless steel														M				
		Cast iron														K				
		Non-ferrous metals														N				
		Titanium alloy														S				
		Hard materials (~ 40HRC)														H				
		Hard materials (40HRC ~)																		
Insert		Description		No. of edges	Dimension (mm)				Angle (°)	Tolerance (mm)		Carbide				Cemet	Applicable toolholder ➡ G55~G58			
					CW	S	RE	INSL		PSIR°/L	CW min.	CW max.	CVD CB9025	PVD PR905	PVD PR915			PVD PR930	- KW10	- TN90
	 Sharp cutting oriented	GMM 1520R-MT-15D	2	1.5	4.3	0 0.05	20	15	- 0.05	+ 0.05							KGM...1.5(...)			
		GMM 2020R-MT-15D 2020R-MT-15D 2020L-MT-15D	2	2	4.3	0 0.05 0	20	15	- 0.05	+ 0.05	○							KGM...2(...) KGM...1.5(...)		
		GMM 2520R-MT-15D	2	2.5	4.3	0 0.05	20	15	- 0.05	+ 0.05								KGM...2.5(...) KGM...2(...)		
		GMM 3020R-MT-15D 3020R-MT-15D 3020L-MT-15D	2	3	4.3	0 0.05 0	20	15	- 0.05	+ 0.05	○							KGM...3(...) KGM...2.5(...) KGM...2(...)		
	 Stability oriented	GMM 2020R-TK-8D	2	2	4.3	0.2	20	8	- 0.05	+ 0.05							KGM...2(...) KGM...1.5(...)			
		GMM 2520R-TK-8D	2	2.5	4.3	0.2	20	8	- 0.05	+ 0.05								KGM...2.5(...) KGM...2(...)		
		GMM 3020R-TK-8D	2	3	4.3	0.25	20	8	- 0.05	+ 0.05	○							KGM...3(...) KGM...2.5(...) KGM...2(...)		
	 1-edge / Stability oriented	GMR 2-TK-8D	1	2	4.3	0.2	20	8	- 0.05	+ 0.05							KGM...2(...) KGM...1.5(...)			
		GMR 3-TK-8D	1	3	4.3	0.25	20	8	- 0.05	+ 0.05								KGM...3(...) KGM...2.5(...) KGM...2(...)		
		GMR 4-TK-8D	1	4	4.3	0.3	20	8	- 0.05	+ 0.05								KGM...4(...) KGM...3(...)		
	 1-edge / Sharp cutting oriented	GMR 2.2-8D GML 2.2-8D	1	2.2	4.3	0.17	20	8	- 0.05	+ 0.05	○						KGM...2(...)			
		GMR 2.2-15D	1	2.2	4.3	0	20	15	- 0.05	+ 0.05	○									
		GMR 3-4D GML 3-4D	1	3	4.3	0.2	20	4	- 0.05	+ 0.05	○							KGM...3(...) KGM...2.5(...) KGM...2(...)		
		GMR 4-4D GML 4-4D	1	4	4.3	0.25	20	4	- 0.05	+ 0.05	○							KGM...4(...) KGM...3(...)		

Handed insert shows Right-hand

Recommended cutting conditions  G143



○ : Will be replaced with a new product

GM/GMN/GMM/GMG/GMGA/FGG



Cutting edge preparation				Carbon steel / Alloy steel												P					
				Stainless steel												M					
				Cast iron												K					
				Non-ferrous metals										●		N					
				Titanium alloy										●		S					
				Hard materials (~ 40HRC)												H					
				Hard materials (40HRC ~)								○	●								
Symbol		Specification		Example																	
F		Sharp edge		F		Sharp edge															
E		R-honed		E008		R0.08mm honed															
Insert				Description		Edge preparation type		No. of edges		Dimension (mm)					Tolerance (mm)		CBN	PCD	Applicable toolholder ● G55~G58		
										CW	S	RE	INSL	LE	CW min.	CW max.					
		GMN 2	E008	1	2	4.3	0.2	20	2.9	-0.05	+0.05	○	○			KGM...2(...) KGM...1.5(...)					
		GMN 2	F	1	2	4.3	0.2	20	2.9	-0.05	+0.05			○	○						
		GMN 3	E008	1	3	4.3	0.4	20	2.9	-0.05	+0.05	○	○			KGM...3(...) KGM...2.5(...) KGM...2(...)					
		GMN 3	F	1	3	4.3	0.2	20	2.9	-0.05	+0.05			○	○						
		GMN 4	E008	1	4	4.3	0.4	20	2.9	-0.05	+0.05	○	○			KGM...4(...) KGM...3(...)					
		GMN 4	F	1	4	4.3	0.2	20	2.9	-0.05	+0.05			○	○						
		GMN 5	F	1	5	4.3	0.2	20	2.9	-0.05	+0.05			○	○	KGM...5(...) KGM...4(...)					
		GMN 6	F	1	6	4.3	0.2	20	2.9	-0.05	+0.05				○	KGMR...6T30 KGM...5(...)					

Recommended cutting conditions ➔ G146

Features of Chipbreaker

Series	Insert	Features
GMM MW		Excellent chip evacuation at Grooving, Turning, Cut-off
GMG MG		Low cutting force with ground chipbreaker
GMG MS GMM MS		Grooving / Turning / Cut-off operations are minimum cutting force at Positive Edge
GMM MT		Small corner-R(RE) and minimize the core which remains in the center of the face
GMM TK		Large corner-R(RE) and stable performance at cut-off
GMM NB		Flat rake face and non-chipbreak It works well for brass

Edge Preparation

Edge Prep.	Chamfered + R-honed Corner-R(RE) = 0.05	Chamfered + R-honed Sharp Corner
		
MT Chipbreaker	CR9025 / PR915	PR930 / KW10
Edge Prep.	Chamfered + R-honed Corner-R(RE) = 0.2 ~ 0.3	Sharp Edge Corner-R(RE) = 0.2 ~ 0.3
		
TK Chipbreaker	CR9025 / PR915	PR930 / KW10
Edge Prep.	R-honed Corner-R(RE) = 0.05	Sharp Edge Sharp Corner
		
Without Chipbreaker (-NB)	CR9025	PR930 / KW10


· Sharp Edge Spec. can reduce cutting force by 40% less than that of chamfer edge.

○ : Will be replaced with a new product

CBN & PCD Inserts are
sold in 1 piece boxes

Available Cutting Diameter of KGM (for automatic lathe) / KGM-T

· There is a limit to available grooving depth depending on the workpiece diameter.

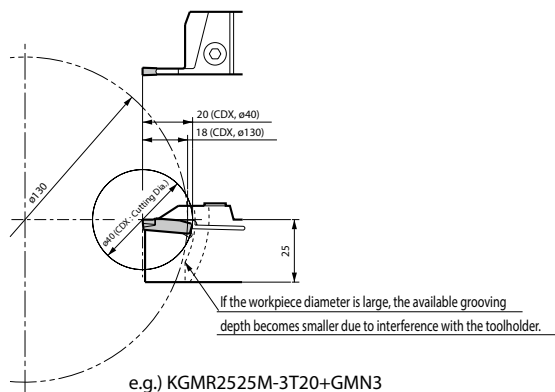

G

KGM (for automatic lathe) Possible Cutting Diameter and Available Grooving Depth Table

Toolholder Description		DCX (Cutting Dia.)															
KGM ^{R/L}	1010□-1.5...	-	-	-	-	-	-	-	18	21	26	38	76	∞			
	1212□-1.5...	-	-	-	-	23	27	37	71	∞	∞	∞	∞				
	1010□-2...	-	-	-	-	-	-	-	18	21	26	38	76				
	1212□-2...	-	-	-	-	23	27	37	71	∞							
	1616□-2...	30	37	47	68	89	131	∞	∞								
	1212□-2.5...	-	-	-	-	23	27	37	71								
	1616□-2.5...	30	37	47	68	89	131	∞	∞								
	1616□-3...																
Available Grooving Depth CDX (mm)		15	14	13	12	11.5	11	10	9	8	7	6	5	4	3	2	1

Grooving


External

Internal

Face

KGM-T Possible Cutting Diameter and Available Grooving Depth Table (GMN, GM^{R/L} when using 1-edge insert)

Toolholder Description		DCX (Cutting Dia.)													
KGM ^{R/L}	2012K-2T17	-	-	-	-	-	-	-	-	66	80	130	260	∞	
	2020K-2T17														
	2525M-2T17														
	1616H-3T20	-	-	-	-	-	40	54	70	100	180	∞	∞		∞
	2012K-3T20	-	-	-	-	-	40	90	130	240					
	2020K-3T20														
	2525M-3T20														
	2020K-4T20														
	2525M-4T20	-	-	50	140	240	∞	∞	∞	∞					
	2525M-4T25														
	2525M-5T25				280	600									
	3232P-5T25														
	2525M-6T30	100	300	∞	∞	∞									
	Available Grooving Depth CDX (mm)		30	27	25	23	22	20	19	18	17	16	15		14

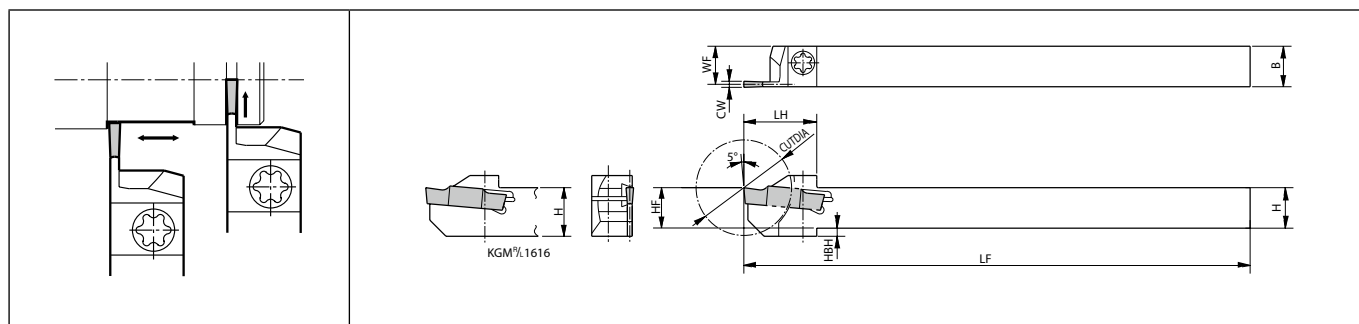KGM (External grooving / for automatic lathe)


Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)												Spare parts		Applicable inserts ➡ G48,G49 G51~G53
															Screw	Wrench	
	R	L	CUTDIA	H	B	LH	HF	HBH	LF	WF	CW min.	CW max.					
KGM%L 1010JX-1.5 1212F-1.5-85 1212JX-1.5	☐	☐	18	10	10	18	10	2	120	9.4	1.5	2	SE-40120TR	LTW-15S	GMM1520... GM.2 GM.20...		
	☐	☐	23	12	12	19	12		85	11.4							
	☐	☐							120								
KGM%L 1010JX-2 1212F-2-85 1212JX-2 1616JX-2	☐	☐	18	10	10	18	10	2	120	9.15	2	3	SE-40120TR	LTW-15S	GM.2 GM.20... GM.24... GM.25... GM.3 GM.30...		
	☐	☐	23	12	12	19	12		85	11.15							
	☐	☐							120	15.15			SE-50125TR	LTW-20			
	☐	☐	30	16	16	24.5	16	-									
KGM%L 1212F-2.5-85 1212JX-2.5 1616JX-2.5	☐	☐	23	12	12	19	12	2	85	11	2.4	3	SE-40120TR	LTW-15S	GM.24... GM.25... GM.3 GM.30...		
	☐	☐															
	☐	☐	30	16	16	24.5	16	-		SE-50125TR			LTW-20				
KGM%L 1616JX-3	☐	☐	30	16	16	24.5	16	-	120	14.8	3	4	SE-50125TR	LTW-20	GM.3, GM.30..., GM.35..., GM.4, GM.40...		

If using a full-R insert, you need to modify the corner of insert adapter part of toolholder.

KGM(for automatic lathe) will be switched to KGZ=> **H28**

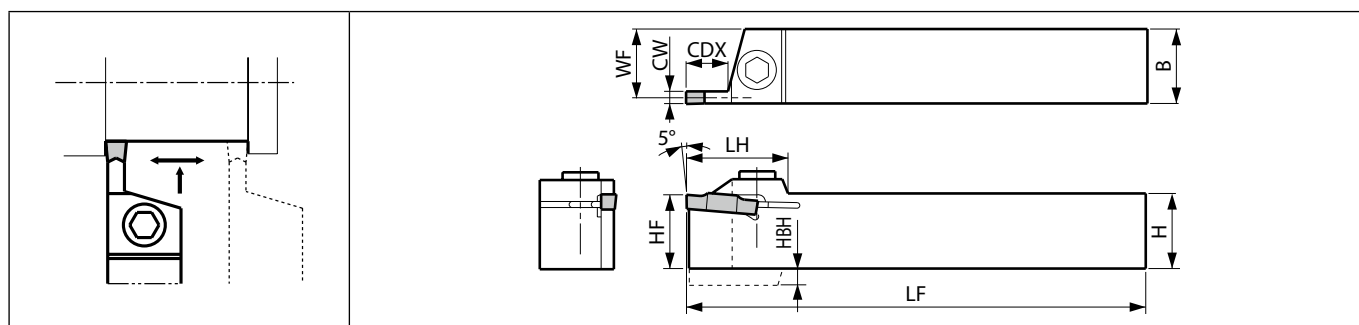KGM (External grooving)

Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)											Spare parts				Applicable inserts ➔ G48~G53
														Clamp bolt	Clamp screw (Torx)	Wrench	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	LF	WF	CW min.	CW max.						
KGM [®] /L 1212H-3	○			12	12		12	4	100	10.8		3	-	SB-5TR	-	LTW-20		GM.3 GM.30...
1616H-3	○		9	16	16	27	16			14.8		3	HH5X16	-	LW-4	-		GM.3 GM.30...
2020K-3	○	○		20	20		20	-	125	18.8		4	HH5X25	-	LW-4	-		GM.4 GM.40...
2525M-3	○	○		25	25		25		150	23.8								
KGM [®] /L 2020K-4	○		10	20	20	27	20	-	125	18.3		4	5	HH5X16	-	LW-4	-	GM.4 GM.40...
2525M-4	○	○		25	25		25		150	23.3				HH5X25	-	LW-4	-	GM.5 GM.50...
KGMR 2020K-5	○		10	20	20	27	20	-	125	17.8		5	6	HH5X16	-	LW-4	-	GM.5 GM.50...
2525M-5	○			25	25		25		150	22.8				HH5X25	-	LW-4	-	GM.6 GM.60...
KGM [®] /L 2525M-8	○	○	25	25	25	40	25	7.5	150	22	8	8		HH6X25	-	LW-5	-	GM..8030...


CDX shows available grooving depth.

4mm width Insert can be installed in KGM[®]/L 1212H-3, but is not recommended due to the toolholder's rigidity.

If using a full-R insert, you need to modify the corner of insert adapter part of toolholder.

KGM will be switched to KGD=> **G34**

○ : Will be replaced with a new product

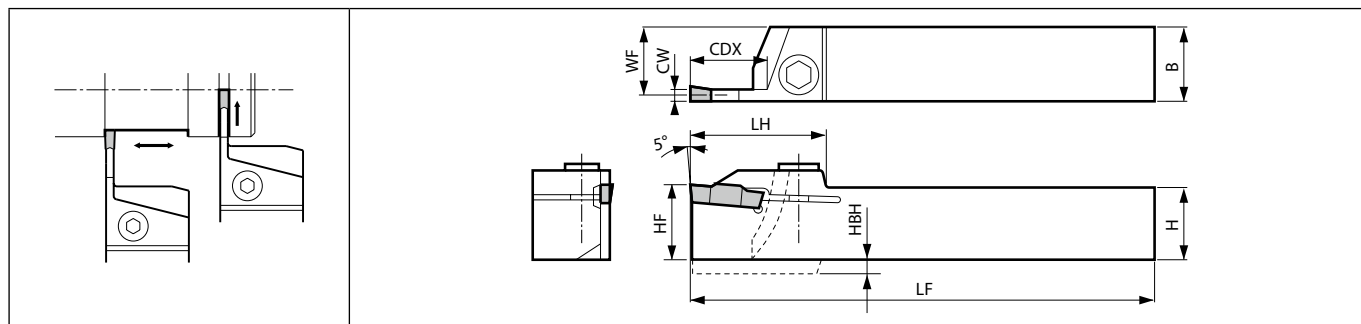KGM-T (External grooving / Deep grooving)

Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)										Spare parts				Applicable inserts ➡ G48~G53
													Clamp bolt	Clamp screw (Torx)	Wrench	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	LF	WF	CW min.	CW max.					
KGM [®] /L 2012K-2T17	○	○	17	20	12	33	20	-	125	11.15	2	3	-	SB-5TR	-	LTW-20	GM.2 GM.20... GM.24... GM.25... GM.30... GM.3
2020K-2T17	○	○		20	20		20	-	125	19.15			HH5X16	-	LW-4	-	
2525M-2T17	○	○		25	25		25	-	150	24.15			HH5X25	-	LW-4	-	
KGM [®] /L 1616H-3T20	○	○	20	16	16	36	16	4	100	14.8	3	4	HH5X16	-	LW-4	-	GM.3 GM.30... GM.35... GM.40... GM.4
2012K-3T20	○	○		20	12		20	-	125	10.8			-	SB-5TR	-	LTW-20	
2020K-3T20	○	○		20	20		20	-	125	18.8			HH5X16	-	LW-4	-	
2525M-3T20	○	○		25	25		25	-	150	23.8			HH5X25	-	LW-4	-	
KGM [®] /L 2020K-4T20	○	○	20	20	20	36	20	-	125	18.3	4	5	HH5X16	-	LW-4	-	GM.4 GM.40... GM.5 GM.50... GM.6
2525M-4T20	○	○		25	25		25	-	150	23.3			HH5X25	-	LW-4	-	
2525M-4T25	○	○		25	25		25	-	150	23.3			HH5X25	-	LW-4	-	
KGM [®] /L 2525M-5T25	○	○	25	25	25	42	25	-	150	22.8	5	6	HH5X25	-	LW-4	-	GM.5 GM.50... GM.6 GM.60... GM.6
3232P-5T25	○	○		32	32		32	-	170	29.8			HH5X25	-	LW-4	-	
KGMR 2525M-6T30	○	○	30	25	25	45	25	-	150	22.4	6	6	HH5X25	-	LW-4	-	GM.6 GM.60...

If using a full-R insert, you need to modify the corner of insert adapter part of toolholder.

CDX shows the distance from the toolholder to the cutting edge. Ref. to the Table (G54) for the relationship between the available grooving depth and the cutting dia.

When using GMG / GMM (2-edge) insert, set the groove depth under 15 mm.


KGM will be switched to KGD=> G34

○ : Will be replaced with a new product

G



Grooving

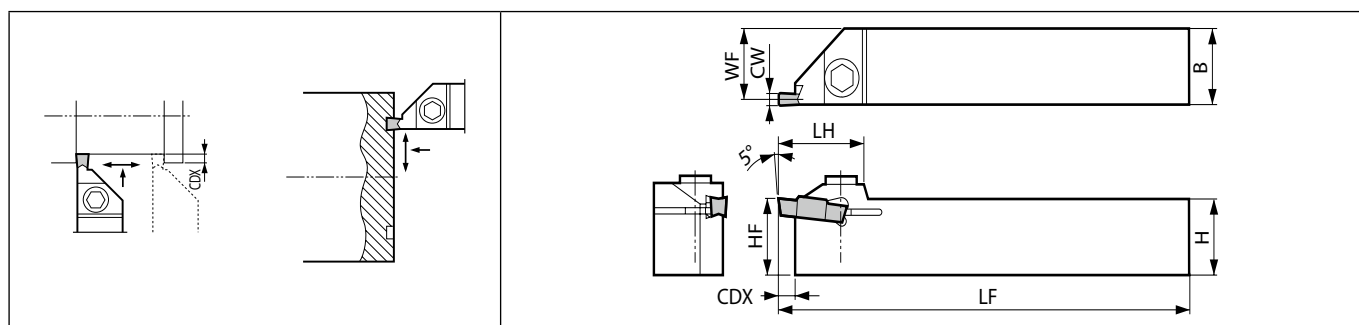KGMM (External grooving / Face grooving)

Right-hand shown

Toolholder dimensions

Description	Availability	Dimension (mm)										Spare parts		Applicable inserts ● G48~G53
												Clamp bolt	Wrench	
		R	CDX	H	B	LH	HF	LF	WF	CW min.	CW max.			
KGMMR 2525M-3	○	4.8	25	25	25	25	150	23.8	3	5		HH5X25	LW-4	FGG..., GM.3(...), GM.4(...), GM.5(...)


CDX shows available grooving depth. (Ref. to the table G59 for Face Grooving)

Grooving

External

Internal

Face

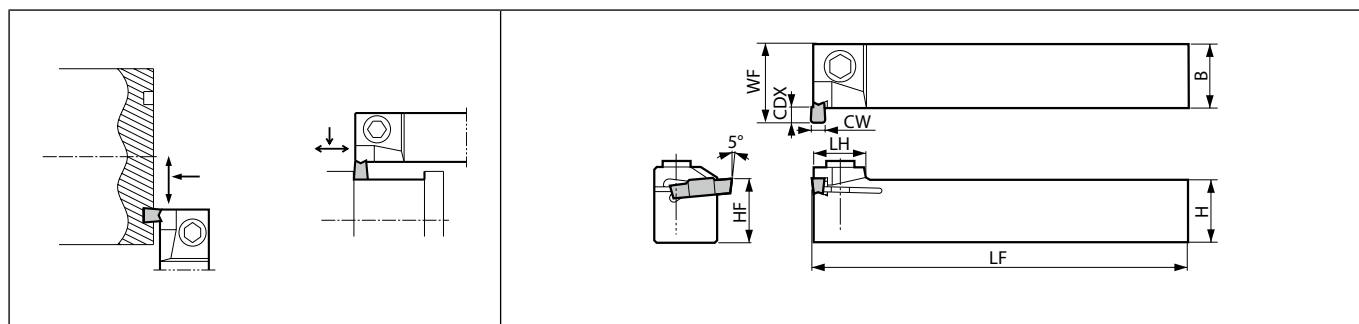KGMS (External grooving / Face grooving)

Right-hand shown

Toolholder dimensions



Description	Availability	Dimension (mm)										Spare parts		Applicable inserts ● G48~G53
												Clamp bolt	Wrench	
		R	CDX	H	B	LH	HF	LF	WF	CW min.	CW max.			
KGMSR 2525M-3	○	4.8	25	25	17	25	150	30	3	5		HH5X25	LW-4	FGG..., GM.3(...), GM.4(...), GM.5(...)

CDX shows available grooving depth. (Ref. to the table G59 for Face Grooving)

○ : Will be replaced with a new product

Selection of Insert & Toolholder (Face Grooving)

Case of KGMM

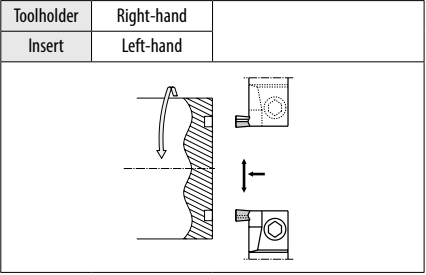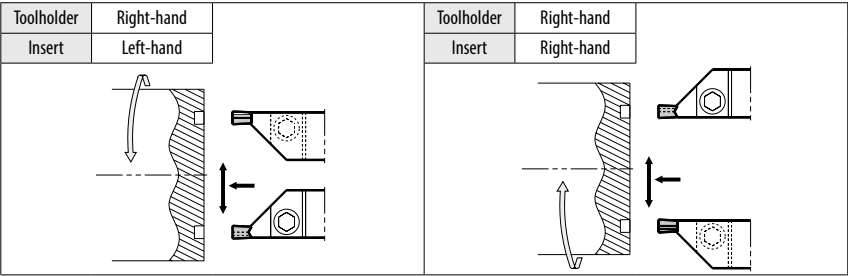

External dia. of the groove (min.) & Grooving Depth (Face Grooving)


KGMM / KGMS (Common) (mm)

Description	DAXN	CD
GMG/GMM3020-○○○○□□	ø100	4.8
GMG/GMM4020-○○○○□□		
GMG/GMM5020-○○○○□□		
FGG [®] /L 3020-02	ø22	4.3
FGG [®] /L 4020-04	ø28	4.8
FGG [®] /L 5020-04	ø30	
GMG3020-150RU	ø22	4.3
GMG4020-200RU	ø28	4.8



Grooving

KGMU (External grooving / Undercut grooving)

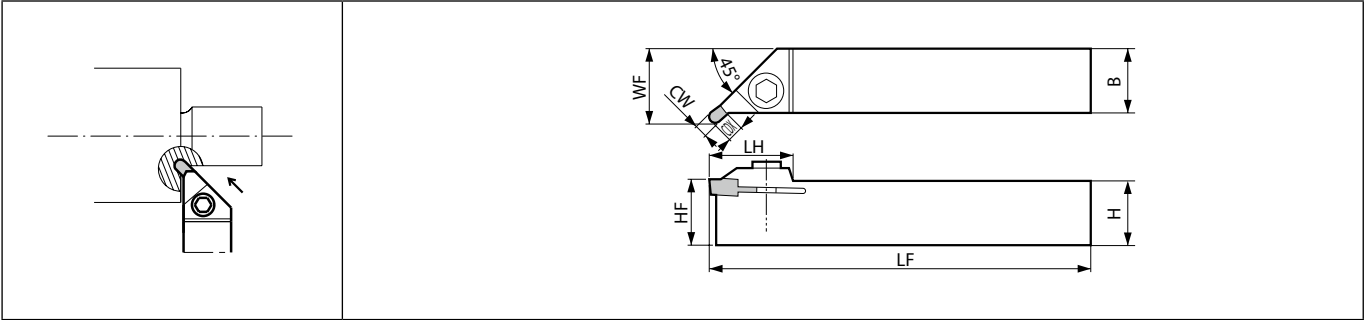

Right-hand shown

Toolholder dimensions

Description	Availability	Dimension (mm)										Spare parts		Applicable inserts ➡ G49
												Clamp bolt	Wrench	
		R	CDX	H	B	LH	HF	LF	WF	CW min.	CW max.			
KGMUR 2525M	○	4.8	25	25	28.5	25	150	28.6	3	5 (6)		HH5X25	LW-4	GMG3020..RU , GMG4020..RU






CDX shows the distance from the toolholder to the cutting edge. Ref. to the table below for the available grooving depth.
WF shows at GMM5020-RU. () indicates external grooving inserts when installed.
External grooving inserts (grooving width 3 mm~6 mm) will be attached. (In case of using GMG○○20-○○○○□□, GMM○○20-○○○○□□, GMN○ insert)

Undercut Depth CD

Description	Undercut Depth	Distance from the face of the workpiece
	CD (mm)	ap (mm)
GMG3020-150RU	3.5	1.8
GMG4020-200RU	4.0	1.9
* In case of undercutting for the diameter 100mm or over, Inserts for External Grooving GMG○○20-○○○○□□, GMM○○20-○○○○□□, GMN○ are also available.		

○ : Will be replaced with a new product


GH/GHU/GA

Cutting edge preparation				Carbon steel / Alloy steel								P													
				Stainless steel								M													
				Cast iron								K													
				Non-ferrous metals								N													
				Titanium alloy								S													
Symbol	Specification	Example		Hard materials (~ 40HRC)								Hard materials (40HRC ~)						H							
S	Chamfered and R-honed	S01020	0.10mm × 20° chamfered and R-honed																						
T	Chamfered	T01020	0.10mm × 20° chamfered																						
Insert				Description				Edge preparation type		No. of edges		Dimension (mm)				Tolerance (mm)		Carbide		Ceramic		Cermet		Applicable toolholder ➡ G62~G64	
												CW	S	RE	INSL	CW min.	CW max.	CVD	PVD	PVD	-	-	-		
		GH 4020-02 4020-05	-	2	4	7.5	0.2 0.5	20	-0.05	+0.05	●	●			●	●							KGH [®] /L ...4 KGHS [®] /L ...4		
		GH 4520-02 4520-05	-	2	4.5	7.5	0.2 0.5	20	-0.05	+0.05					●	●									
		GH 5020-02 5020-05	-	2	5	7.5	0.2 0.5	20	-0.05	+0.05	●	●			●	●							KGH [®] /L ...5 KGHS [®] /L ...5		
		GH 5520-02 5520-05	-	2	5.5	7.5	0.2 0.5	20	-0.05	+0.05					●	●									
		GH 6020-02 6020-05	-	2	6	7.5	0.2 0.5	20	-0.05	+0.05	●	●			●	●									
		GH 6520-02 6520-05	-	2	6.5	7.5	0.2 0.5	20	-0.05	+0.05					●	●									
		GH 7020-02 7020-05	-	2	7	7.5	0.2 0.5	20	-0.05	+0.05	●	●			●	●							KGH [®] /L ...7		
		GH 7520-02 7520-05	-	2	7.5	7.5	0.2 0.5	20	-0.05	+0.05					●	●									
		GH 8020-02 8020-05	-	2	8	7.5	0.2 0.5	20	-0.05	+0.05	●	●			●	●									
		GH 10025-05	-	2	10	7.5	0.5	25	-0.05	+0.05	●	●												KGH [®] /L ...10	
		GH 12025-05	-	2	12	7.5	0.5	25	-0.05	+0.05	●	●					●								
				GH 4020-05	S01020 T01020	2	4	7.5	0.5	20	-0.05	+0.05			●	●								KGH [®] /L ...4 KGHS [®] /L ...4	
GH 5020-05	S01020 T01020			2	5	7.5	0.5	20	-0.05	+0.05			●	●											
GH 6020-05	T01020			2	6	7.5	0.5	20	-0.05	+0.05							●						KGH [®] /L ...5 KGHS [®] /L ...5		
GH 7020-05	T01020			2	7	7.5	0.5	20	-0.05	+0.05							●								
		GHU 40-20		-	2	4	7.5	0.25	20	-0.05	+0.05	●								●		KGH [®] /L ...4 KGHS [®] /L ...4			
		GHU 50-20		-	2	5	7.5	0.3	20	-0.05	+0.05	●								●					
		GHU 60-20		-	2	6	7.5	0.3	20	-0.05	+0.05	●									●		KGH [®] /L ...5 KGHS [®] /L ...5		
		GA 30		-	2	3	5	0.2	25	-0.05	+0.05	○								○		KGA [®] /L ...3			
		GA 40		-	2	4	5	0.25	25	-0.05	+0.05	○								○		KGA [®] /L ...4			
		GA 50		-	2	5	5	0.3	30	-0.05	+0.05	○								○		KGA [®] /L ...5			

Recommended cutting conditions ● G65

● : Standard item ○ : Will be replaced with a new product

KGH (External grooving)

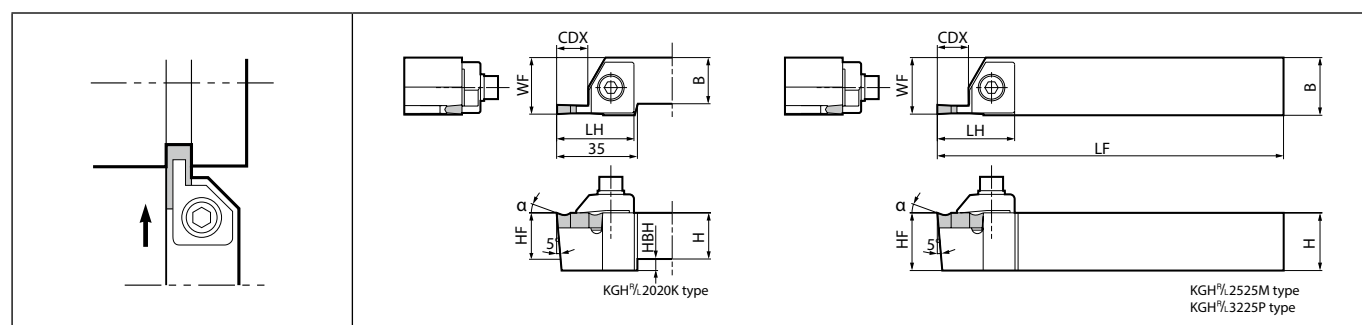

Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)															Applicable inserts 🔩 G61
													Clamp	Clamp bolt	Spring	Washer	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	LF	WF (min.)	WF (max.)							
KGH% 2020K-4 2525M-4	●	●	13	20	20	33.5	20	5	125	24.5	24.8	CGH-1%L	HH6X25	SP-6	W-6	LW-5	GH4.20-... , GHU40-20	
	●	●		25	25		25	-	150									
KGH% 2020K-5 2525M-5 3225P-5	●	●	13	20	20	33.5	20	5	125	25	25.8	CGH-1%L	HH6X25	SP-6	W-6	LW-5	GH5.20-... , GHU50-20 GH6.20-... , GHU60-20	
	●	●		25	25		25	-	150									
	●	●		32			32	-	170									
KGH% 2020K-7 2525M-7	●	●	13	20	20	33.5	20	7	125	24.5	25	CGH-2%L	HH6X25	SP-6	W-6	LW-5	GH7.20-... GH8020-...	
	●	●		25	25		25	-	150									
KGH% 2525M-10 3225P-10	●	●	17	25		41	25	-	150	25.5	26.5	CGH-3%L	HH6X25	SP-6	W-6	LW-5	GH10025-05 GH12025-05	
	●			32			32	-	170									


CDX shows available grooving depth.

WF of KGH% Toolholder depends on the insert's edge width.

Clamp : CGH-○R for Right-hand Toolholder and CGH-○L for Left-hand Toolholder.

● : Standard item

KGHS (External grooving)

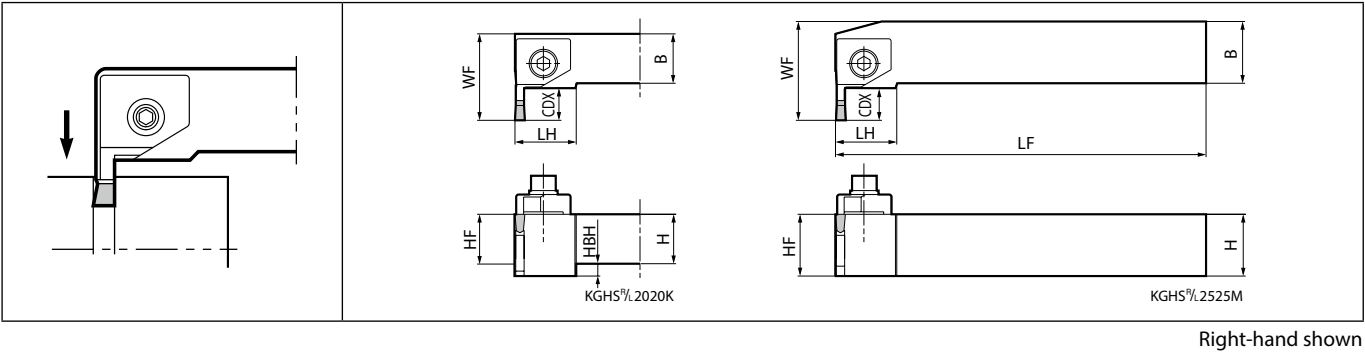

Toolholder dimensions

Description	Availability		Dimension (mm)									Spare parts					Applicable inserts ➡ G61
												Clamp	Clamp bolt	Spring	Washer	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	LF	WF							
KGHS%L 2020K-4 2525M-4	●	●	13	20	20	25	20	5	125	35	CGH-1½ _R	HH6X25	SP-6	W-6	LW-5	GH4.20-.., GHU40-20	
	●	●		25	25		25	-	150	40							
KGHS%L 2020K-5 2525M-5	●	●	13	20	20	25	20	5	125	35	CGH-1½ _R	HH6X25	SP-6	W-6	LW-5	GH5.20-.., GHU50-20 GH6.20-.., GHU60-20	
	●	●		25	25		25	-	150	40							


CDX shows available grooving depth.
Clamp : CGH-○L for Right-hand Toolholder and CGH-○R for Left-hand Toolholder.

Rake Angle (α) after Installment of GH / GHU insert

When using GH○○-○○		When using GHU○○-○○	
α	Insert Grades	α	Insert Grades
0°	A65, A66N, PT600M	10°	TN60 CR9025
10°	TC40N		
20°	TN90, TC60M PR930 KW10		

● : Standard item

KGA (External grooving / Deep grooving)

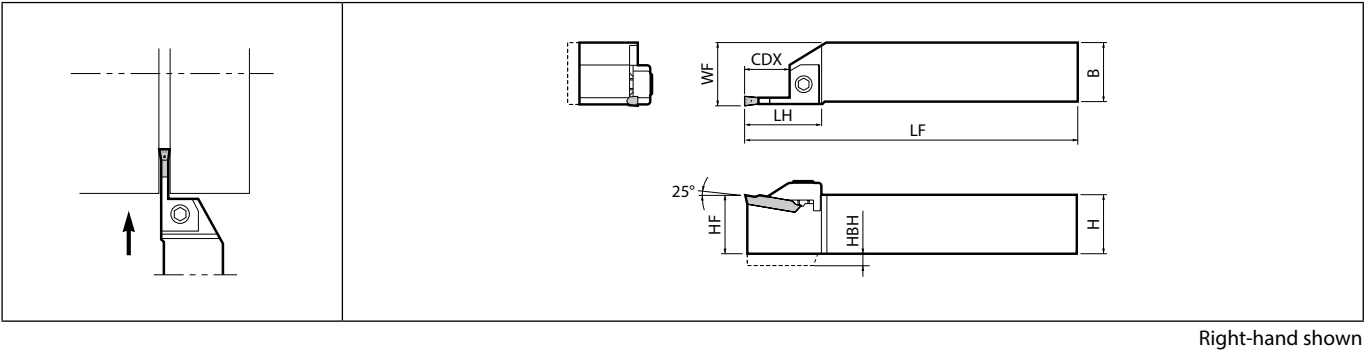

Toolholder dimensions

Description	Availability		Dimension (mm)									Spare parts				Applicable inserts ➡ G61
												Clamp bolt	Clamp	Spring	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	LF	WF						
KGA%L 2020K-3 2525M-3	○	○	20	20	20	37	20	5	125	21.5	HH6X20	CGA-3%L	SP-6	LW-5	GA30	
	○	○		25	25		25	-	150	26.5						
KGAR 2020K-4 2525M-4	○		20	20	20	37	20	5	125	21.5	HH6X20	CGA-4R	SP-6	LW-5	GA40	
	○			25	25		25	-	150	26.5						
KGAR 2020K-5 2525M-5	○		25	20	20	42	20	5	125	21.5	HH6X20	CGA-5R	SP-6	LW-5	GA50	
	○			25	25		25	-	150	26.5						

CDX shows available grooving depth.
Clamp : CGA-○R for Right-hand Toolholder and CGA-○L for Left-hand Toolholder.

○ : Will be replaced with a new product

Recommended cutting conditions

GH inserts - ground chipbreaker

Workpiece material	Recommended insert grades (Vc: m/min)							(1) f for grooving (mm/rev) (2) f for turning (mm/rev) (3) ap for turning (mm)				Remarks
	Cermet		PVD coated carbide	Carbide	Ceramic			GH 40~50...	GH 55~70...	GH 75~80...	GH 100~120...	
	TC40N	TC60M	PR930	KW10	A65	A66N	PT600M					
Carbon steel	☆ 150~220	☆ 100~150	★ 80~180	-	-	-	-	(1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0	(1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0	(1) 0.1~0.25 (2) 0.1~0.2 (3) Max. 1.5	(1) 0.15~0.3 (2) 0.15~0.25 (3) Max. 2.0	Coolant
Alloy steel	☆ 130~200	☆ 80~130	★ 80~160	-	-	-	-	(1) 0.07~0.18 (2) 0.07~0.13 (3) Max. 1.0	(1) 0.07~0.18 (2) 0.07~0.13 (3) Max. 1.0	(1) 0.1~0.23 (2) 0.1~0.18 (3) Max. 1.5	(1) 0.15~0.27 (2) 0.15~0.22 (3) Max. 2.0	
Stainless steel	-	☆ 60~100	★ 60~130	-	-	-	-	(1) 0.07~0.16 (2) 0.07~0.13 (3) Max. 1.0	(1) 0.07~0.16 (2) 0.07~0.13 (3) Max. 1.0	(1) 0.1~0.21 (2) 0.1~0.18 (3) Max. 1.5	(1) 0.15~0.25 (2) 0.15~0.22 (3) Max. 2.0	
Cast iron	-	-	-	★ 60~100	☆ 150~300	☆ 150~300	☆ 150~300	KW10 (1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0 A65/A66N (1) 0.03~0.07 (2) Not recom. (3) Not recom.	KW10 (1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0 A65/A66N (1) 0.03~0.07 (2) Not recom. (3) Not recom.	KW10 (1) 0.1~0.25 (2) 0.1~0.2 (3) Max. 1.5 A65/A66N (1) 0.05~0.09 (2) Not recom. (3) Not recom.	KW10 (1) 0.15~0.3 (2) 0.15~0.25 (3) Max. 2.0 A65/A66N (1) 0.05~0.09 (2) Not recom. (3) Not recom.	
Aluminum alloys	-	-	-	★ 150~400	-	-	-	(1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0	(1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0	(1) 0.1~0.25 (2) 0.1~0.2 (3) Max. 1.5	(1) 0.15~0.3 (2) 0.15~0.25 (3) Max. 2.0	
Brass	-	-	-	★ 150~300	-	-	-	(1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0	(1) 0.07~0.2 (2) 0.07~0.15 (3) Max. 1.0	(1) 0.1~0.25 (2) 0.1~0.2 (3) Max. 1.5	(1) 0.15~0.3 (2) 0.15~0.25 (3) Max. 2.0	
Hard materials	-	-	-	-	☆ 40~80	☆ 40~80	☆ 40~80	(1) 0.02~0.05 (2) 0.01~0.03 (3) Max. 0.1	(1) 0.02~0.05 (2) 0.01~0.03 (3) Max. 0.2	(1) 0.02~0.05 (2) 0.01~0.04 (3) Max. 0.2		

* Above cutting condition is for external grooving. Set both cutting speed and feed 10% lower for internal grooving.

★:1st recommendation ☆:2nd recommendation

GHU Inserts - molded chipbreaker

Workpiece material	Recommended insert grades (Vc: m/min)		(1) f for grooving (mm/rev) (2) f for turning (mm/rev) (3) ap for turning (mm)			Remarks
	Cermet	CVD coated carbide	GHU 40-20	GHU 50-20	GHU 60-20	
	TN60	CR9025				
Carbon steel	☆ 130~200	☆ 80~180	(1) 0.06~0.12 (2) 0.05~0.1 (3) Max. 1.0	(1) 0.06~0.12 (2) 0.05~0.1 (3) Max. 1.0	(1) 0.06~0.15 (2) 0.05~0.12 (3) Max. 1.5	Coolant
Alloy steel	☆ 100~180	☆ 80~160	(1) 0.06~0.12 (2) 0.05~0.1 (3) Max. 1.0	(1) 0.06~0.12 (2) 0.05~0.1 (3) Max. 1.0	(1) 0.06~0.15 (2) 0.05~0.12 (3) Max. 1.5	
Stainless steel	-	☆ 60~130	(1) 0.06~0.1 (2) 0.05~0.08 (3) Max. 0.8	(1) 0.06~0.1 (2) 0.05~0.08 (3) Max. 0.8	(1) 0.06~0.12 (2) 0.05~0.1 (3) Max. 1.2	

* Above cutting condition is for external grooving. Set both cutting speed and feed 10% lower for internal grooving.

★:1st recommendation ☆:2nd recommendation

GA inserts - molded chipbreaker


Workpiece material	Recommended insert grades (Vc: m/min)		(1) f for grooving (mm/rev) (2) f for turning (mm/rev) (3) ap for turning (mm)			Remarks
	Cermet	CVD coated carbide	GA 30	GA 40	GA 50	
	TN60	CR9025				
Carbon steel	☆ 130~200	★ 80~180	(1) 0.06~0.18 (2) 0.05~0.15 (3) Max. 0.8	(1) 0.06~0.21 (2) 0.05~0.17 (3) Max. 1.0	(1) 0.06~0.25 (2) 0.05~0.2 (3) Max. 1.3	Coolant
Alloy steel	☆ 100~180	★ 80~160	(1) 0.06~0.15 (2) 0.05~0.12 (3) Max. 0.3	(1) 0.06~0.18 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.06~0.22 (2) 0.05~0.18 (3) Max. 0.8	
Stainless steel	-	★ 60~130	(1) 0.06~0.1 (2) 0.05~0.08 (3) Max. 0.8	(1) 0.06~0.1 (2) 0.05~0.08 (3) Max. 0.8	(1) 0.06~0.12 (2) 0.05~0.1 (3) Max. 1.2	

★:1st recommendation ☆:2nd recommendation



Grooving

GMGW

			Carbon steel / Alloy steel									P		
			Stainless steel									M		
			Cast iron									K		
			Non-ferrous metals							●		N		
			Titanium alloy							●		S		
			Hard materials (~ 40HRC)									H		
			Hard materials (40HRC ~)											
Insert		Description		No. of edges	Dimension (mm)					Tolerance (mm)		PCD	Applicable toolholder G67	
					CW	S	RE	INSL	LE	CW min.	CW max.			KPD001
		GMGW 6030-30R		1	6	5.5	3	30	4.5	- 0.03	+ 0.03	●	KGMW®/L2525M-6	
		GMGW 8030-40R		1	8	5.5	4	30	6	- 0.03	+ 0.03	●	KGMW®/L2525M-8	
		GMGW 8030-40R-HR		1	8	5.5	4	30	5	- 0.03	+ 0.03	●	KGMW®/L2525M-8	

GMGW inserts are exclusively used for KGMW toolholder. It cannot be used for other toolholder because of its different installation angle.
GMGW inserts Edge Preparation : R-honed Cutting Edge.

Recommended cutting conditions ➡ G67

Grooving

G



External


Internal

Face

● : Standard item

G66

CBN & PCD Inserts are
sold in 1 piece boxes

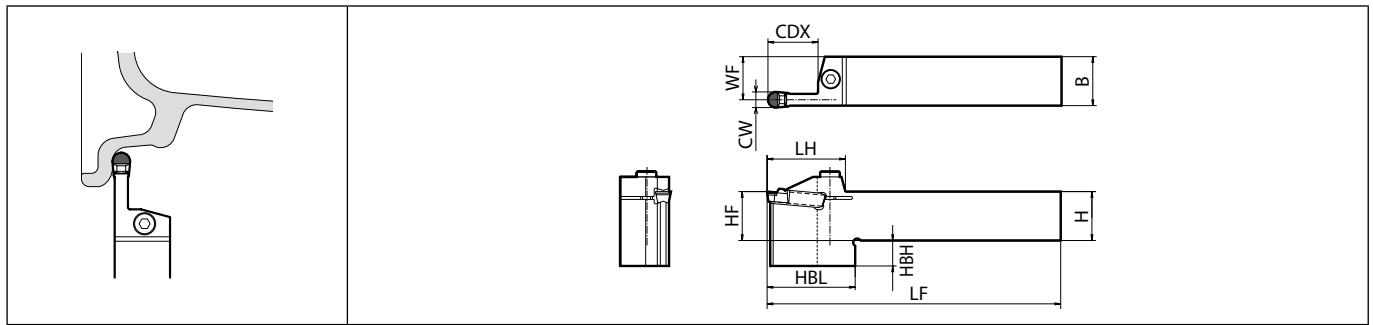KGMW (External grooving / Face grooving / Copying)

Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)										Spare parts		Applicable inserts ➡ G66
													Clamp bolt	Wrench	
	R	L	CDX	H	B	LH	HF	HBH	HBL	LF	WF				
KGMW [®] /L 2525M-6	●	●	25	25	25	40	25	13	55	150	22.8	HH6X25	LW-5		GMGW6030-30R
KGMW [®] /L 2525M-8	●	●	25	25	25	40	25	13	55	150	22	HH6X25	LW-5		GMGW8030-40R (-HR)

Recommended cutting conditions


Workpiece material	Recommended insert grades (Vc: m/min)	(1) f for grooving (mm/rev)
	PCD	(2) f for turning (mm/rev)
	KPD001	(3) ap for turning (mm)
Aluminum	★ 150~2,700	(1) 0.05 ~ 0.3 (2) 0.2 ~ 0.8 (3) Max. 3

★ : 1st recommendation

● : Standard item

Small diameter internal grooving


EZ bar and system tip-bars

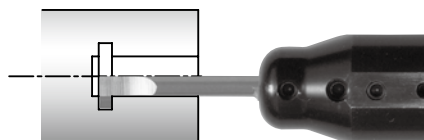

Type	EZG
Min. bore diameter	ø3~ø8
Edge width (mm)	0.5~2.0
Grooving depth (mm)	1.0~2.0
See Page	G70



EZ bars

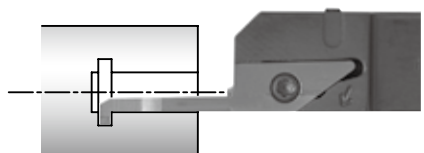

Type	VNG
Min. bore diameter	ø4~ø7
Edge width (mm)	1.0~2.0
Grooving depth (mm)	0.8~2.0
See Page	G72




System tip-bars


G

Grooving

Internal Grooving ø8~ - shallow grooving

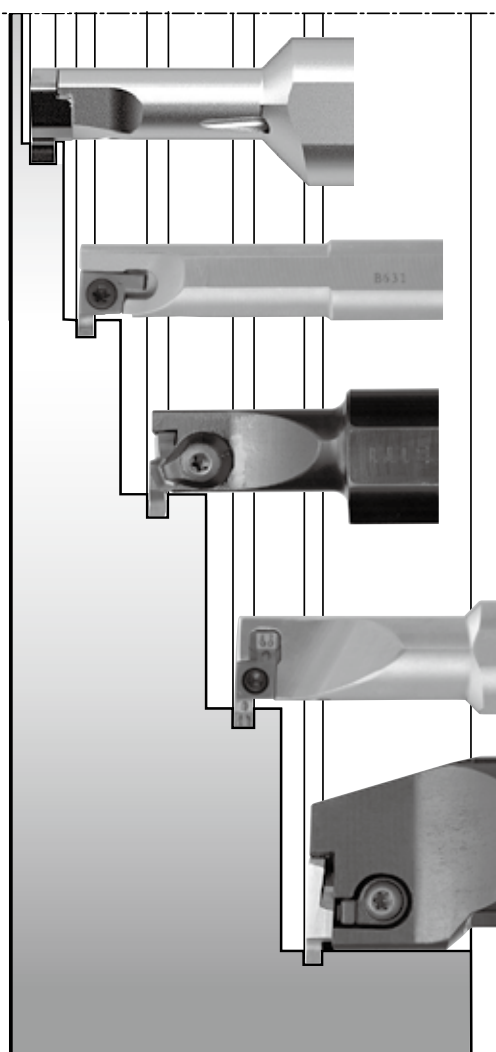


Type	SIGC
Min. bore diameter	ø8~ø12
Edge width (mm)	1.0~3.0
Grooving depth (mm)	1.5~2.2
See Page	G76,G77



1-edge

Ground chipbreaker

Type	SIGE
Min. bore diameter	ø8~ø12
Edge width (mm)	1.0~3.0
Grooving depth (mm)	1.5~2.2
See Page	G81~G83

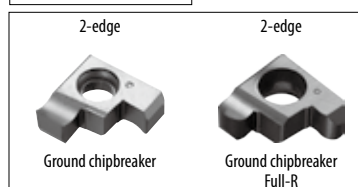


2-edge

2-edge

Ground chipbreaker

Ground chipbreaker Full-R

Type	GIV
Min. bore diameter	ø12~ø40
Edge width (mm)	1.0~5.0
Grooving depth (mm)	1.7~6.3
See Page	G86~G88

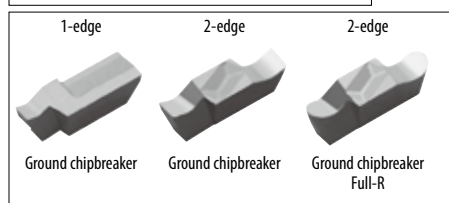

1-edge

2-edge


2-edge

Ground chipbreaker

Ground chipbreaker

Ground chipbreaker Full-R

Type	SIGE
Min. bore diameter	ø14~ø40
Edge width (mm)	1.0~5.0
Grooving depth (mm)	2.5~6.5
See Page	G81~G83

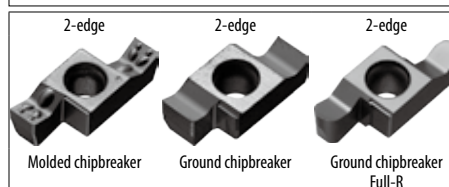

2-edge

2-edge


2-edge

Molded chipbreaker

Ground chipbreaker

Ground chipbreaker Full-R

Type	KIGBA
Min. bore diameter	ø35~ø40
Edge width (mm)	0.33~4.8
Grooving depth (mm)	0.8~2.8
See Page	G89

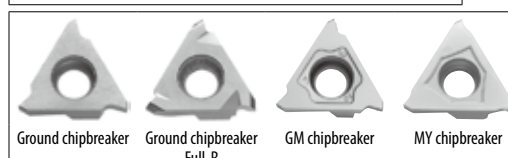


Ground chipbreaker

Ground chipbreaker Full-R

GM chipbreaker

MY chipbreaker

Summary deep grooving

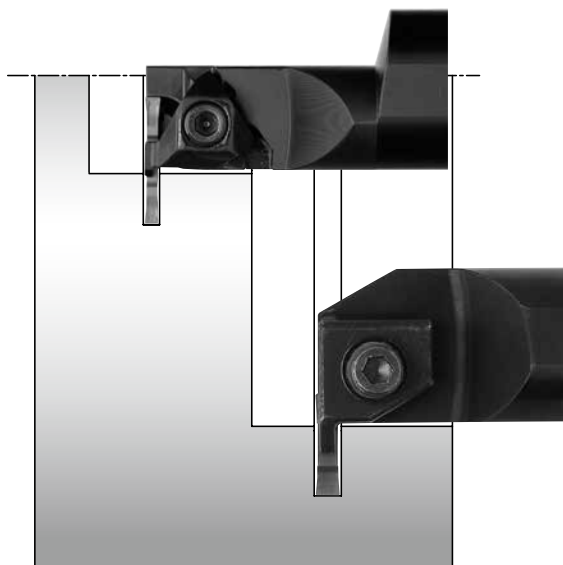

Type	KGIA
Min. bore diameter	ø32~ø66
Edge width (mm)	3.0~5.0
Grooving depth (mm)	10~15
See Page	G97


Type	KIGH
Min. bore diameter	ø45~ø65
Edge width (mm)	4.0~8.0
Grooving depth (mm)	12
See Page	G93



Molded chipbreaker



Ground chipbreaker




Molded chipbreaker



G

Grooving

Summary internal grooving & turning ø20~

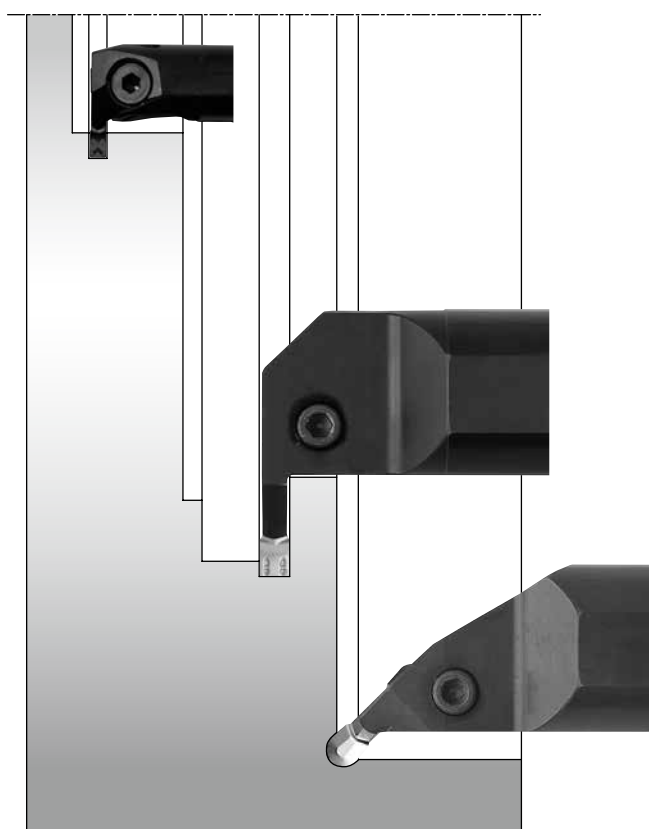

Type	KGDI
Min. bore diameter	ø18~ø40
Edge width (mm)	2.0~5.0
Grooving depth (mm)	4.5~11.0
See Page	G91

Type	KIGM-8
Min. bore diameter	ø65
Edge width (mm)	8.0
Grooving depth (mm)	20
See Page	G95

Type	KIGMU-8
Min. bore diameter	ø65
Edge width (mm)	8.0
Grooving depth (mm)	2.2
See Page	G95



GMI chipbreaker

Molded chipbreaker
Full-R


Molded chipbreaker



Ground chipbreaker

Molded chipbreaker
Full-R

EZG (Internal grooving)

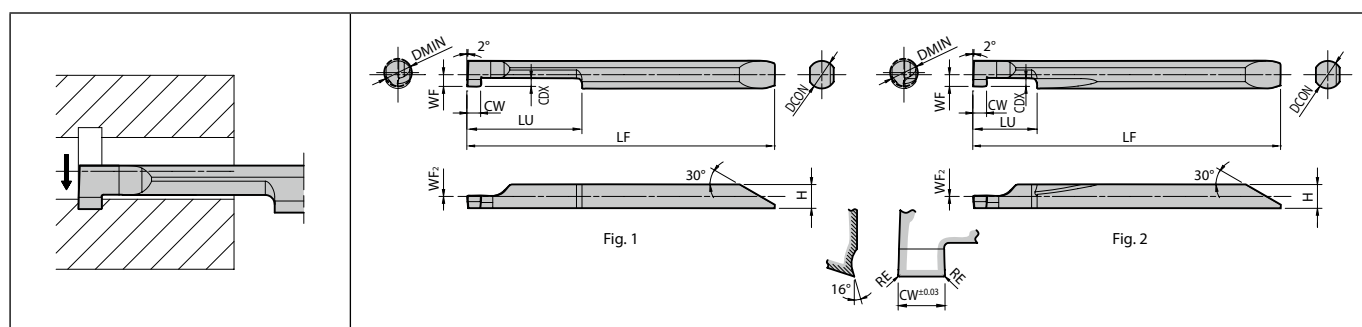

Right-hand shown

Dimensions

Description	No. of edges	Dimension (mm)										Fig.	Tolerance (mm)				Carbide		Applicable sleeve ➔ F38~F43
		DMIN	CW	CDX	RE	DCON	H	LF	LU	WF	WF ₂		CW min.	CW max.	RE min.	RE max.	PVD	-	
																	PR1225	GW05	
EZGR 040040-050 040040-100 040040-150 040040-200	1	4	0.5 1 1.5 2	1	0.05	4	3.45	44.7	12	1.7	0	2	-0.03	+0.03	-0.013	+0.013	● ● ● ●	● ● ● ●	EZH040...
EZGR 050050-100 050050-150 050050-200	1	5	1 1.5 2	1.5	0.05	5	4.3	52.8	20	2.15	0	1	-0.03	+0.03	-0.013	+0.013	● ● ● ●	● ● ● ●	EZH050...
EZGR 060060-100 060060-150 060060-200	1	6	1 1.5 2	2	0.05	6	5.15	60.7	20	2.65	0	1	-0.03	+0.03	-0.013	+0.013	● ● ● ●	● ● ● ●	EZH060...
EZGR 070070-100 070070-150 070070-200	1	7	1 1.5 2	2	0.05	7	6.2	63.7	25	3.05	0	1	-0.03	+0.03	-0.013	+0.013	● ● ● ●	● ● ● ●	EZH070...
EZGR 080070-100 080070-150 080070-200	1	8	1 1.5 2	2	0.05	7	6.2	63.7	25	3.45	0	1	-0.03	+0.03	-0.013	+0.013	● ● ● ●	● ● ● ●	EZH070...
EZGR 030030-050S 030030-100S	1	3	0.5 1	0.8	0.05	3	2.5	38.7	5	1.25	0	2	-0.03	+0.03	-0.013	+0.013	● ●		EZH030...
EZGR 040040-050S 040040-100S 040040-150S 040040-200S	1	4	0.5 1 1.5 2	1	0.05	4	3.45	44.7	8	1.7	0	2	-0.03	+0.03	-0.013	+0.013	● ● ● ●		EZH040...
EZGR 050050-100S 050050-150S 050050-200S	1	5	1 1.5 2	1.5	0.05	5	4.3	52.8	10	2.15	0	2	-0.03	+0.03	-0.013	+0.013	● ● ● ●		EZH050...
EZGR 060060-100S 060060-150S 060060-200S	1	6	1 1.5 2	2	0.05	6	5.15	60.7	10	2.65	0	2	-0.03	+0.03	-0.013	+0.013	● ● ● ●		EZH060...
EZGR 070070-100S 070070-150S 070070-200S	1	7	1 1.5 2	2	0.05	7	6.2	63.7	10	3.05	0	2	-0.03	+0.03	-0.013	+0.013	● ● ● ●		EZH070...
EZGR 080070-100S 080070-150S 080070-200S	1	8	1 1.5 2	2	0.05	7	6.2	63.7	10	3.45	0	2	-0.03	+0.03	-0.013	+0.013	● ● ● ●		EZH070...

CDX shows available grooving depth.


Recommended cutting conditions ● G144

● : Standard item

G70

EZ bars are
sold in 1 piece boxes

EZ Bars Identification System

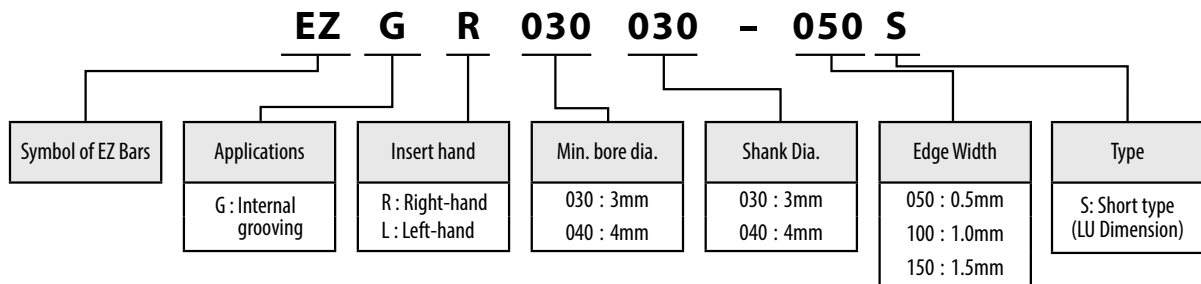

Applicable Sleeves

Sleeve				Applicable Insert for Small Dia. Internal Grooving		Applicable Machine Manufacturer
EZH-CT (Adjustable overhang length with coolant hole) F38, F39	EZH-HP (Adjustable overhang length) F40, F41	EZH-ST F42, F43	Sleeve Shank Dia. DCON(mm)	EZG	Shank Dia. DCON(mm)	
-	-	EZH 03012ST-80	12	EZG_ 030030-...	3	(General purpose)
		04012ST-80		EZG_ 040040-...	4	
		05012ST-80		EZG_ 050050-...	5	
		06012ST-80		EZG_ 060060-...	6	
		07012ST-80		EZG_ 070070-...	7	
		07012ST-80		EZG_ 080070-...	8	
-	EZH 03016HP-100	EZH 03016ST-100	16	EZG_ 030030-...	3	(General purpose)
	04016HP-100	04016ST-100		EZG_ 040040-...	4	
	05016HP-100	05016ST-100		EZG_ 050050-...	5	
	06016HP-100	06016ST-100		EZG_ 060060-...	6	
	07016HP-100	07016ST-100		EZG_ 070070-...	7	
	07016HP-100	07016ST-100		EZG_ 080070-...	8	
EZH 03019CT-120	EZH 03019HP-120	EZH 03019ST-120	19.05	EZG_ 030030-...	3	Citizen Machinery
04019CT-120	04019HP-120	04019ST-120		EZG_ 040040-...	4	
05019CT-120	05019HP-120	05019ST-120		EZG_ 050050-...	5	
06019CT-120	06019HP-120	06019ST-120		EZG_ 060060-...	6	
07019CT-120	07019HP-120	07019ST-120		EZG_ 070070-...	7	
07019CT-120	07019HP-120	07019ST-120		EZG_ 080070-...	8	
EZH 03020CT-120	EZH 03020HP-120	EZH 03020ST-120	20	EZG_ 030030-...	3	Eguro Tsugami Citizen Machinery (General purpose)
04020CT-120	04020HP-120	04020ST-120		EZG_ 040040-...	4	
05020CT-120	05020HP-120	05020ST-120		EZG_ 050050-...	5	
06020CT-120	06020HP-120	06020ST-120		EZG_ 060060-...	6	
07020CT-120	07020HP-120	07020ST-120		EZG_ 070070-...	7	
07020CT-120	07020HP-120	07020ST-120		EZG_ 080070-...	8	
EZH 03022CT-135	EZH 03022HP-135	EZH 03022ST-135	22	EZG_ 030030-...	3	Star Micronics Nomura DS Tsugami
04022CT-135	04022HP-135	04022ST-135		EZG_ 040040-...	4	
05022CT-135	05022HP-135	05022ST-135		EZG_ 050050-...	5	
06022CT-135	06022HP-135	06022ST-135		EZG_ 060060-...	6	
07022CT-135	07022HP-135	07022ST-135		EZG_ 070070-...	7	
07022CT-135	07022HP-135	07022ST-135		EZG_ 080070-...	8	
EZH 03025.0CT-135	EZH 03025.0HP-135	EZH 03025.0ST-135	25	EZG_ 030030-...	3	Eguro Tsugami Citizen Machinery (General purpose)
04025.0CT-135	04025.0HP-135	04025.0ST-135		EZG_ 040040-...	4	
05025.0CT-135	05025.0HP-135	05025.0ST-135		EZG_ 050050-...	5	
06025.0CT-135	06025.0HP-135	06025.0ST-135		EZG_ 060060-...	6	
07025.0CT-135	07025.0HP-135	07025.0ST-135		EZG_ 070070-...	7	
07025.0CT-135	07025.0HP-135	07025.0ST-135		EZG_ 080070-...	8	
EZH 03025.4CT-120	EZH 03025.4HP-120	EZH 03025.4ST-120	25.4	EZG_ 030030-...	3	Citizen Machinery
04025.4CT-120	04025.4HP-120	04025.4ST-120		EZG_ 040040-...	4	
05025.4CT-120	05025.4HP-120	05025.4ST-120		EZG_ 050050-...	5	
06025.4CT-120	06025.4HP-120	06025.4ST-120		EZG_ 060060-...	6	
07025.4CT-120	07025.4HP-120	07025.4ST-120		EZG_ 070070-...	7	
07025.4CT-120	07025.4HP-120	07025.4ST-120		EZG_ 080070-...	8	

- Choose sleeves (DCB) to meet with DCON dimension of Internal Grooving Inserts.

- Adjustment Pin cannot be installed to EZH-ST sleeves.


- To adjust overhang of the bar, please use EZH-CT / HP Sleeves.

- Machine manufacturers in random order.



Grooving

VNG

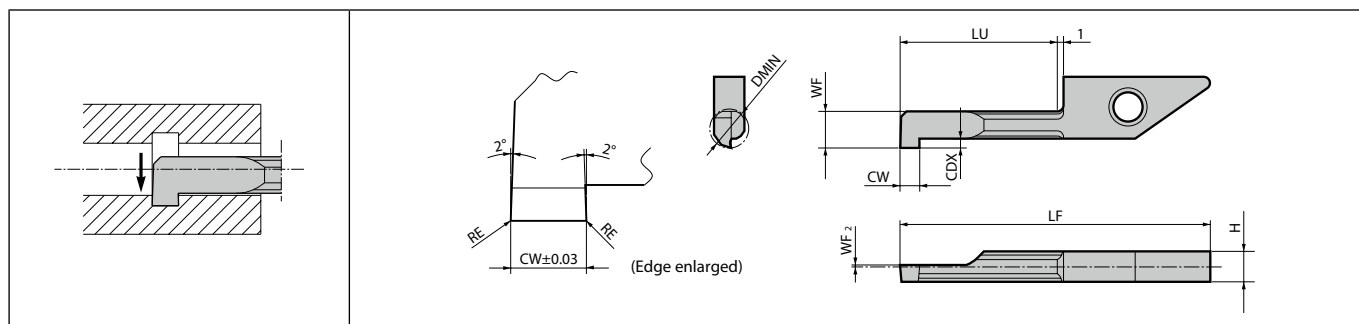

Right-hand shown

Dimensions

Description	No. of edges	Dimension (mm)										Tolerance (mm)		Carbide		Applicable toolholder 🔧 F48~F51
		DMIN	CW	CDX	RE	H	LF	LU	WF	WF ₂	CW min.	CW max.	PVD	-		
													PR1225	PR930	KW10	
VNGR 0410-11 0420-11	1	4	1 2	0.8	0.05	3.9	30.8	11	3.5	0.1	-0.03	+0.03	● ● ●	● ● ●	SVNR....-12N SVNSR....-12...N S....-SVNR12N S....-SVNR12SN	
VNGR 0510-11 0520-11	1	5	1 2	1	0.05	3.9	30.8	11	4.4	0.1	-0.03	+0.03	● ● ●	● ● ●		
VNGR 0610-20 0620-20	1	6	1 2	1.8	0.05	3.9	39.8	20	5.2	0.3	-0.03	+0.03	● ● ●	● ● ●		
VNGR 0710-20 0720-20	1	7	1 2	2	0.05	3.9	39.8	20	6.2	0.3	-0.03	+0.03	● ● ●	● ● ●		

CDX shows available grooving depth.

WF2 indicates the cutting edge is above the Tool's Center Position.

Recommended cutting conditions G144

G

Grooving

External

Internal


Face

● : Standard item

G72

System tip-bars are
sold in 5 piece boxes

VNG

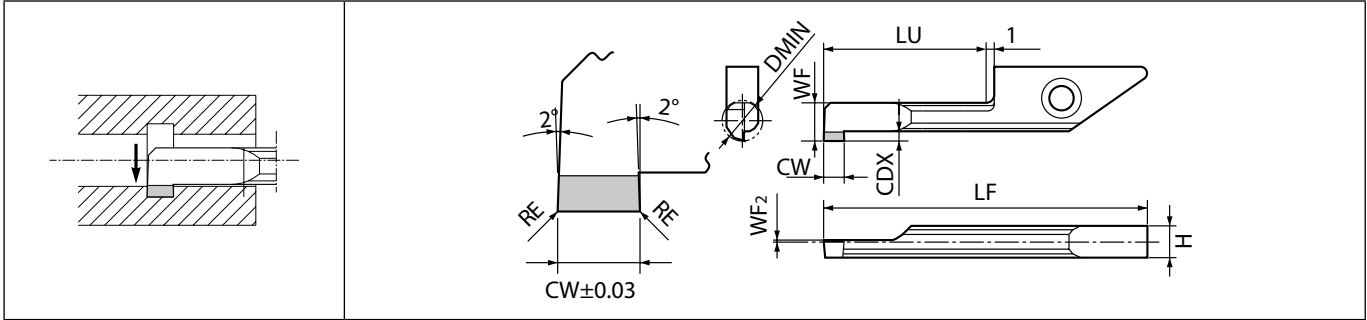

Right-hand shown

Dimensions

Description		No. of edges	Dimension (mm)										Tolerance (mm)		PCD	Applicable toolholder ➡ F48~F51
			DMIN	CW	CDX	RE	H	LF	LU	WF	WF ₂	CW min.	CW max.	-		
														KPD001		
VNGR	0410-11NB 0420-11NB	1	4	1 2	0.8	0.05	3.9	30.8	11	3.5	0.1	-0.03	+0.03	MT0 MT0	SVNR...-12N SVNSR...-12-.N S...-SVNR12N S...-SVNR12SN	
VNGR	0510-11NB 0520-11NB	1	5	1 2	1	0.05	3.9	30.8	11	4.4	0.1	-0.03	+0.03	MT0 MT0		
VNGR	0610-20NB 0620-20NB	1	6	1 2	1.8	0.05	3.9	39.8	20	5.2	0.3	-0.03	+0.03	MT0 MT0		
VNGR	0710-20NB 0720-20NB	1	7	1 2	2	0.05	3.9	39.8	20	6.2	0.3	-0.03	+0.03	MT0 MT0		

CDX shows available grooving depth.
WF₂ indicates the cutting edge is above the Tool's Center Position.



SIGC

Newly developed clamping system ensures a firm insert hold to provide high-precision machining. Excellent chip evacuation with double coolant holes and optimized flute shape with a $\varnothing 8$ mm minimum cutting diameter.

1 Firm insert clamping system provides high-precision machining

Firm clamping action by pulling the bottom surface of the insert in axial direction
Precise machining is achieved by ensuring a firm clamp on the insert


G

Grooving

External


Internal

Face

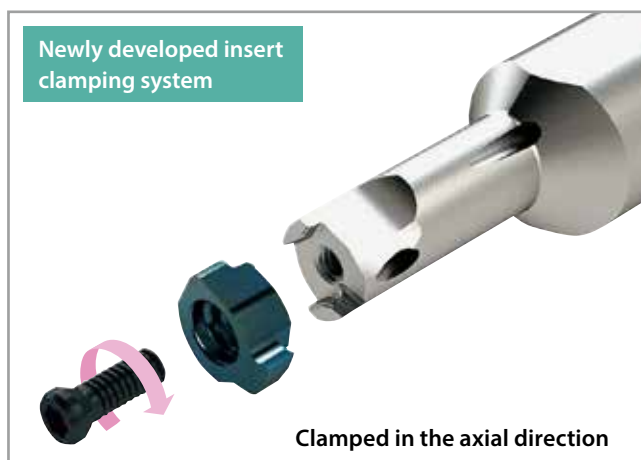


Clamping part (image)

Firm clamping is available due to large contact surface

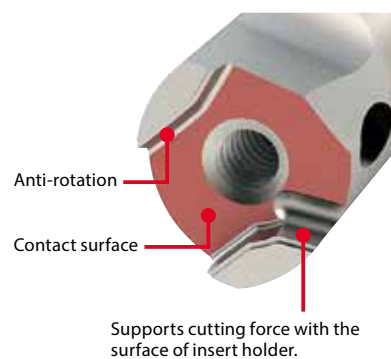


SIGC



Bottom surface contact

Competitor A




Point contact

2 Excellent chip evacuation

Excellent chip evacuation with double coolant holes and optimized flute shape


Double coolant holes

Promotes chip evacuation by aiming at bottom face of hole

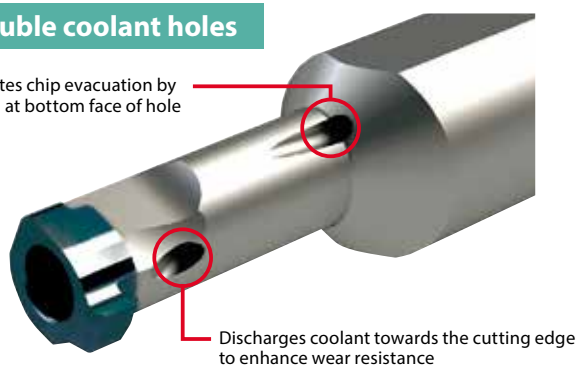



Flute shape

Smoothly evacuates chips towards the back of the toolholder

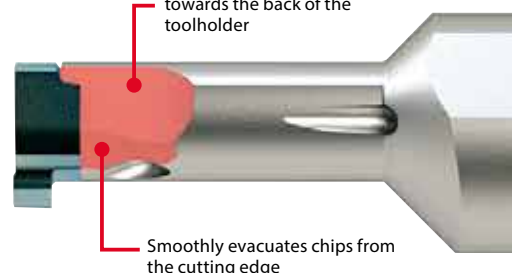

Provides a better solution when facing chip evacuation difficulties in small internal grooving.
Prevents chip crunching.

GC

			Carbon steel / Alloy steel										P		
			Stainless steel										M		
			Cast iron										K		
			Non-ferrous metals										N		
			Titanium alloy										S		
			Hard materials (~ 40HRC)										H		
			Hard materials (40HRC ~)												
Insert		Description	No. of edges	Dimension (mm)							Tolerance (mm)		Carbide	Applicable toolholder ➡ G76,G77	
				CW	CDX	S	D1	RE	INSL	W1	CW min.	CW max.	PVD		
													PR1535 PR1725		
		GC08R	100-005	1	1.5	3.5	2.7	0.05	7.7	3.4	- 0.025	+ 0.025	●●	SIGCR08...	
			120-005	1.2				0.05							
			125-005	1.25				0.05							
			150-010	1.5				0.1							
			200-010	2				0.1							
		GC08L	100-005	1	1.5	3.5	2.7	0.05	7.7	3.4	- 0.025	+ 0.025	●●	SIGCL08...	
			120-005	1.2				0.05							
			125-005	1.25				0.05							
			150-010	1.5				0.1							
			200-010	2				0.1							
		GC10R	100-005	1	2.2	4.4	3.5	0.05	9.6	4.7	- 0.025	+ 0.025	●●	SIGCR10...	
			120-005	1.2				0.05							
			125-005	1.25				0.05							
			145-010	1.45				0.1							
			150-010	1.5				0.1							
			200-010	2				0.1							
			250-020	2.5				0.2							
		GC10L	100-005	1	2.2	4.4	3.5	0.05	9.6	4.7	- 0.025	+ 0.025	●●	SIGCL10...	
			120-005	1.2				0.05							
			125-005	1.25				0.05							
			145-010	1.45				0.1							
			150-010	1.5				0.1							
			200-010	2				0.1							
			250-020	2.5				0.2							
GC12R	100-005	1	2.2	5.4	3.5	0.05	11.6	4.7	- 0.025	+ 0.025	●●	SIGCR12...			
	120-005	1.2				0.05									
	125-005	1.25				0.05									
	145-010	1.45				0.1									
	150-010	1.5				0.1									
	200-010	2				0.1									
	250-020	2.5				0.2									
GC12L	100-005	1	2.2	5.4	3.5	0.05	11.6	4.7	- 0.025	+ 0.025	●●	SIGCL12...			
	120-005	1.2				0.05									
	125-005	1.25				0.05									
	145-010	1.45				0.1									
	150-010	1.5				0.1									
	200-010	2				0.1									
	250-020	2.5				0.2									
		GC08R	100-050R	1	1	1.5	3.5	2.7	0.5	7.7	3.4	- 0.025	+ 0.025	●●	SIGCR08...
			200-100R	2			1								
		GC10R	100-050R	1	1	2.2	4.4	3.5	0.5	9.6	4.7	- 0.025	+ 0.025	●●	SIGCR10...
			200-100R	2				1							
		GC12R	100-050R	1	1	2.2	5.4	3.5	0.5	11.6	4.7	- 0.025	+ 0.025	●●	SIGCR12...
			200-100R	2				1							


Right-hand shown
CDX shows available grooving depth.

Recommended cutting conditions  G144

● : Standard item

GC type inserts are
sold in 5 piece boxes

SIGC Excellent bar (Internal grooving)

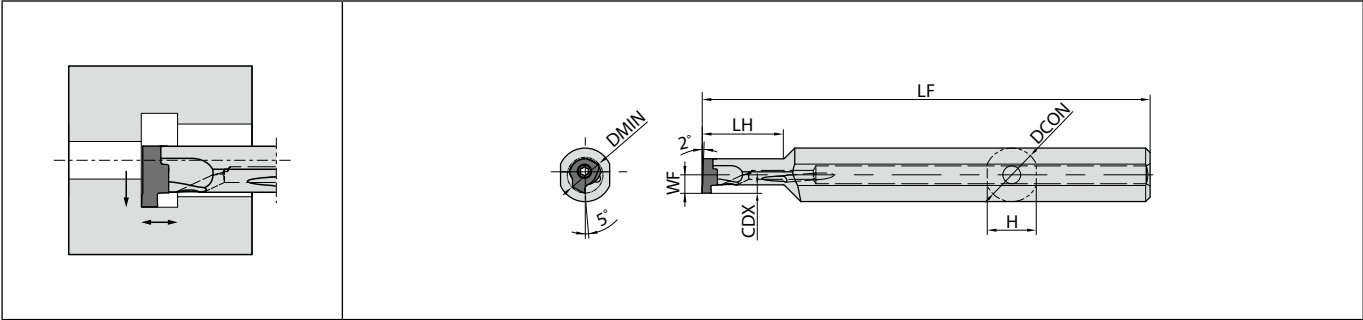

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		Dimension (mm)								Coolant hole	Spare parts		Applicable inserts  G75
												Screw	Wrench	
	R	L	DMIN	DCON	CDX	H	LH	LF	WF					
SIGC [®] /L 0812-EH	●	●	8	12	1.5	11	18	100	4.1	Yes	SB-2270T [®] /L	FT-7	GC08 [®] /L...	
SIGC [®] /L 1016-EH	●	●	10	16	2.2	15	21	100	5	Yes	SB-3070T [®] /L	FT-8	GC10 [®] /L...	
SIGC [®] /L 1216-EH	●	●	12	16	2.2	15	25	110	6	Yes	SB-3070T [®] /L	FT-8	GC12 [®] /L...	


Setting the insert

Use compressed air or other measures to remove chips from the insert pocket.
Mount the insert into the toolholder ensure the bottom makes contact with the end of the toolholder's surface.
Keeping the insert seated, tighten the insert clamp screw at an appropriate torque.
Recommended tightening torque : 0.8 N·m (SB-2270T[®]/L), 1.2 N·m (SB-3070T[®]/L)
L-hand clamp screw for L-hand toolholder

GC**R***	GC**L***
 Right-hand screw	 Left-hand screw
Toolholder : SIGCR..... Clamp Screw : SB-.....TR	Toolholder : SIGCL..... Clamp Screw : SB-.....TL

● : Standard item

SIGC Carbide shank bar (Internal grooving)

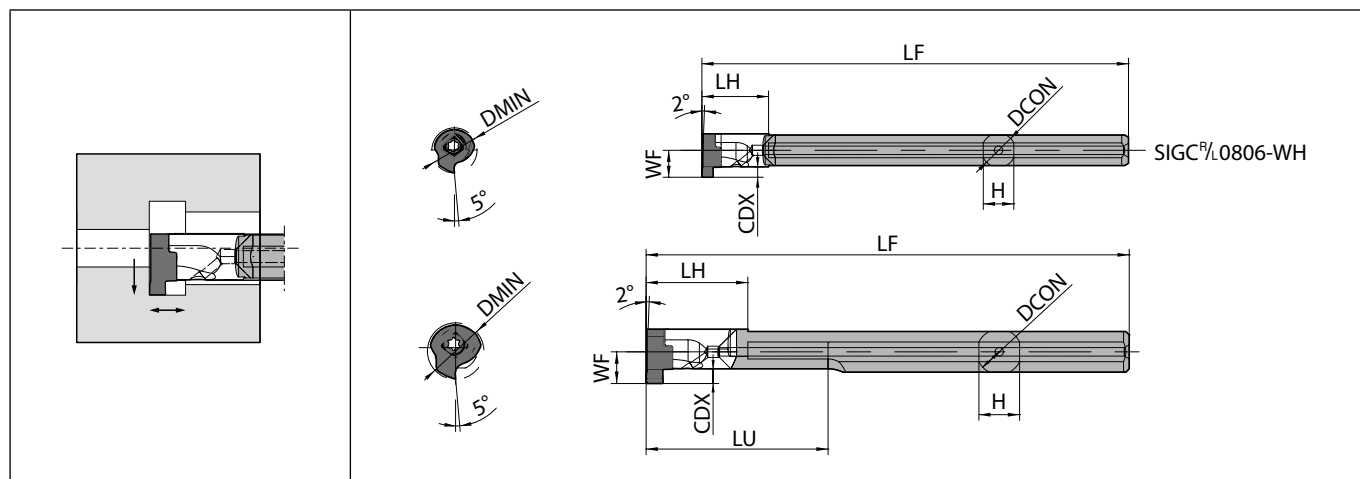

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		Dimension (mm)								Coolant hole	Spare parts		Applicable inserts ➔ G75
												Screw	Wrench	
	R	L	DMIN	DCON	CDX	H	LH	LF	LU	WF				
SIGC®/L 0806-WH	●	●	8	6	1.5	5.4	12	75	-	4.8	Yes	SB-2270T®/L	FT-7	GC08®/L...
SIGC®/L 1008-WH-L85	●	●	10	8	2.2	7.2	18	85	32	5.6	Yes	SB-3070T®/L	FT-8	GC10®/L...
SIGC®/L 1008-WH-L100	●	●						100	45			SB-3070TR		
SIGC®/L 1210-WH-L95	●	●	12	10	2.2	9.2	18	95	32	6.6	Yes	SB-3070T®/L	FT-8	GC12®/L...
SIGC®/L 1210-WH-L110	●	●						110	45					

Setting the insert

Use compressed air or other measures to remove chips from the insert pocket.

Mount the insert into the toolholder ensure the bottom makes contact with the end of the toolholder's surface.

Keeping the insert seated, tighten the insert clamp screw at an appropriate torque.

Recommended tightening torque : 0.8 N·m (SB-2270T®/L), 1.2 N·m (SB-3070T®/L)

L-hand clamp screw for L-hand toolholder

GC**R***	GC**L***
Right-hand screw	Left-hand screw
Toolholder : SIGCR..... Clamp Screw : SB-....TR	Toolholder : SIGCL..... Clamp Screw : SB-....TL




Applicable Sleeves

Shank Size (Hole Dia.: mm)	06 (6 mm)	08 (8 mm)	10 (10 mm)	12 (12 mm)	16 (16 mm)
Toolholder Description	SIGC®/L 0806-WH	SIGC®/L 1008-WH-L85 SIGCR 1008-WH-L100	SIGCR 1210-WH-L95 SIGC®/L 1210-WH-L110	SIGC®/L 0812-EH	SIGC®/L 1016-EH SIGC®/L 1216-EH
SH Sleeves (For Boring Bars)	SH 06...	SH 08...	SH 10...	SH 12...	SH 16...
SHC Sleeves (Coolant Sleeve)	—	SHC 08...	SHC 10...	SHC 12...	SHC 16...
SHA Sleeves	—	SHA 08...	SHA 10...	SHA 12...	—
EZH Sleeves (For EZ Bars)	EZH 06...ST/CT/HP...	EZH 08...ST/CT/HP...	—	—	—

* Remove the positioning pin when mounting SIGC to the EZH-CT/HP Sleeve
Positioning function is not available

● : Standard item

GE

			Carbon steel / Alloy steel											☺	☹	☹	☹	P	
			Stainless steel											☺	☹	☹	☹	M	
			Cast iron													☺		K	
			Non-ferrous metals													☹		N	
			Titanium alloy													☹		S	
			Hard materials (~ 40HRC)															H	
			Hard materials (40HRC ~)																
			Insert		Description	No. of edges	Dimension (mm)							Tolerance (mm)		Carbide			Cermat
CW	CDX	S					D1	RE	INSL	W1	CW min.	CW max.	PVD	-	-				
													PR125 PR2025	KW10	TiN6020				
		GER	100-005A	1				0.05							●	●	●	SIGER0808A-EH SIGER0808A-WH	
			120-005A	1.2				0.05						●	●	●			
			125-005A	1.25				0.05						●	●	●			
			150-010A	1.5				0.1						●	●	●			
			200-010A	2				0.1						●	●	●			
		GEL	100-005A	1	1.5	2.58	2.5		6.5	6.69	-0.025	+0.025			●	●	●	SIGEL0808A-EH SIGEL0808A-WH	
			120-005A	1.2				0.05						●	●	●			
			125-005A	1.25				0.05						●	●	●			
			150-010A	1.5				0.1						●	●	●			
			200-010A	2				0.1						●	●	●			
		GER	100-005B	1				0.05						●	●	●	SIGER....B-EH SIGER....B-WH SIGER....B-WH-90		
			120-005B	1.2				0.05						●	●	●			
			125-005B	1.25				0.05						●	●	●			
			145-010B	1.45				0.1						●	●	●			
			150-010B	1.5				0.1						●	●	●			
		GEL	100-005B	1	2.2	3.18	2.7		8.2	8.46	-0.025	+0.025			●	●	SIGEL....B-EH SIGEL....B-WH		
			120-005B	1.2				0.05						●	●	●			
			125-005B	1.25				0.05						●	●	●			
145-010B	1.45					0.1						●	●	●					
150-010B	1.5					0.1						●	●	●					
		GER	100-050AR	1				0.5						●	●	SIGER0808A-EH SIGER0808A-WH			
			200-100AR	2				1						●	●		●		
		GER	100-050BR	1	2.2	3.18	2.7		8.2	8.46	-0.025	+0.025			●	●	SIGER....B-EH SIGER....B-WH SIGER....B-WH-90		
			200-100BR	2				1						●	●	●			
				GER	150-010CM	1.5				0.1					●	●	SIGER....C-EH SIGER....C-WH SIGER....C-WH-90		
					200-010CM	2				0.1					●	●		●	
					250-020CM	2.5	2.5	4.05	2.8		11.48	5.8	-0.05	+0.05		●		●	●
					300-020CM	3				0.2					●	●		●	
					350-020CM	3.5				0.2					●	●		●	
				GER	150-010DM	1.5	3			0.1						●	●	SIGER2020D-EH	
					200-010DM	2	3.2			0.1						●	●		●
					230-020DM	2.3	3.2			0.2						●	●		●
					250-020DM	2.5	3.2	5.05	3.4	0.2	16.44	6.8	-0.05	+0.05		●	●		●
					300-020DM	3	4.5			0.2						●	●		●
					350-020DM	3.5	4.5			0.2					●	●	●		
					400-020DM	4	4.5			0.2						●	●		●







Right-hand shown
CDX shows available grooving depth.

Recommended cutting conditions ☺ G145

● : Standard item □ : Deleted from the next catalog

G78

GE



			Carbon steel / Alloy steel											☺	☹	☹	P
			Stainless steel											☺	☹	☹	M
			Cast iron												☺	☹	K
			Non-ferrous metals												☹	☹	N
			Titanium alloy												☹	☹	S
			Hard materials (~ 40HRC)														H
			Hard materials (40HRC ~)														
Insert		Description	No. of edges	Dimension (mm)							Tolerance (mm)		Carbide			Cermat	Applicable toolholder ☺ G81~G83
				CW	CDX	S	D1	RE	INSL	W1	CW min.	CW max.	PVD	-	-		
													PR125 PR2025	KW10	TiN6020		
  2-edge	 2-edge	GER 100-005C	1				0.05						●	●	●	SIGER.....C-EH SIGER.....C-WH SIGER.....C-WH-90	
		120-005C	1.2				0.05						●	●	●		
		125-005C	1.25				0.05						●	●	●		
		140-005C	1.4				0.05						●	●	●		
		145-010C	1.45				0.1						●	●	●		
		150-010C	1.5				0.1						●	●	●		
		170-010C	1.7				0.1						●	●	●		
		185-010C	1.85				0.1						●	●	●		
		195-010C	1.95				0.1						●	●	●		
		200-010C	2				0.1						●	●	●		
		250-020C	2.5	2.5	4.05	3.1	0.2	11.48	5.8	-0.03	+0.03	●	●	●			
		300-020C	3				0.2					●	●	●			
		350-020C	3.5				0.2					●	●	●			
		GEL 100-005C	1				0.05						●	●	●		SIGEL.....C-EH SIGEL.....C-WH
		120-005C	1.2				0.05						●	●	●		
125-005C	1.25				0.05						●	●	●				
145-010C	1.45				0.1						●	●	●				
150-010C	1.5				0.1						●	●	●				
200-010C	2				0.1						●	●	●				
250-020C	2.5				0.2						●	●	●				
300-020C	3				0.2						●	●	●				
350-020C	3.5				0.2						●	●	●				
  2-edge	 2-edge	GER 100-005D	1	2.5			0.05						●	●	●	SIGER2020D-EH	
		140-005D	1.4	2.5			0.05						●	●	●		
		145-010D	1.45	2.5			0.1						●	●	●		
		150-010D	1.5	3			0.1						●	●	●		
		170-010D	1.7	3			0.1						●	●	●		
		185-010D	1.85	3			0.1						●	●	●		
		195-010D	1.95	3			0.1						●	●	●		
		200-010D	2	3.2			0.1						●	●	●		
		225-010D	2.25	3.2			0.1						●	●	●		
		230-020D	2.3	3.2			0.2						●	●	●		
		250-020D	2.5	3.2			0.2						●	●	●		
		280-020D	2.8	3.2			0.2						●	●	●		
		300-020D	3	4.5			0.2						●	●	●		
		330-020D	3.3	4.5	5.05	3.6	0.2	16.44	6.8	-0.03	+0.03	●	●	●			
		350-020D	3.5	4.5			0.2						●	●	●		
		400-020D	4	4.5			0.2						●	●	●		
		GEL 100-005D	1	2.5			0.05						●	●	●		SIGEL2020D-EH
		140-005D	1.4	2.5			0.05						●	●	●		
		145-010D	1.45	2.5			0.1						●	●	●		
		150-010D	1.5	3			0.1						●	●	●		
		170-010D	1.7	3			0.1						●	●	●		
		200-010D	2	3.2			0.1						●	●	●		
		225-010D	2.25	3.2			0.1						●	●	●		
		230-020D	2.3	3.2			0.2						●	●	●		
250-020D	2.5	3.2			0.2						●	●	●				
300-020D	3	4.5			0.2						●	●	●				
400-020D	4	4.5			0.2						●	●	●				
  2-edge / Full R	 2-edge / Full R	GER 200-100CR	2	2			1	11.48	5.8	-0.03	+0.03	●	●	●	SIGER.....C-EH SIGER.....C-WH(-..)		
		250-125CR	2.5	2.5	4.05	3.1	1.25					●	●	●			
		300-150CR	3				1.5					●	●	●			
		GER 200-100DR	2	2	3.2	5.05	3.6	1	16.44	6.8	-0.03	+0.03	●	●	●	SIGER2020D-EH	
		300-150DR	3	4.5			1.5					●	●	●			
												●	●	●			

Right-hand shown
CDX shows available grooving depth.

Recommended cutting conditions G145

● : Standard item □ : Deleted from the next catalog

GE/GER


		Carbon steel / Alloy steel											☺	☹	☹	☹	☹	P
		Stainless steel											☺	☹	☹	☹	☹	M
		Cast iron													☺	☹	☹	K
		Non-ferrous metals													☹	☹	☹	N
		Titanium alloy													☹	☹	☹	S
		Hard materials (~ 40HRC)																H
		Hard materials (40HRC ~)																
Insert		Description	No. of edges	Dimension (mm)							Tolerance (mm)		Carbide			Cermat	Applicable toolholder ☺ G81	
				CW	CDX	S	D1	RE	INSL	W1	CW min.	CW max.	PVD	-	-			
													PR125 PR2025	KW10	TN6020			
	 2-edge / Molded Chipbreaker	GER 150-010EM	2	1.5	3			0.1						●	●		Siger....E-EH	
		200-010EM		2	3.2			0.1						●	●			
		250-020EM		2.5	4.5			0.2						●	●			
		300-020EM		3	4.5			0.2						●	●			
		350-020EM		3.5	5.5	5.55	4.4	0.2	21.66	9.54	-0.05	+0.05	●	●				
		400-020EM		4	5.5			0.2						●	●			
		450-020EM		4.5	6.5			0.2						●	●			
		500-020EM		5	6.5			0.2						●	●			
	 2-edge	GER 100-005E	2	1	2.5			0.05						●	●	●	Siger....E-EH	
		150-010E		1.5	3			0.1						●	●	●		
		170-010E		1.7	3			0.1						●	●	●		
		185-010E		1.85	3			0.1						●	●	●		
		195-010E		1.95	3			0.1						●	●	●		
		200-010E		2	3.2			0.1						●	●	●		
		225-010E		2.25	3.2			0.1						●	●	●		
		230-020E		2.3	3.2			0.2						●	●	●		
		250-020E		2.5	4.5			0.2						●	●	●		
		275-020E		2.75	4.5			0.2						●	●	●		
		280-020E		2.8	4.5			0.2						●	●	●		
		300-020E		3	4.5			0.2						●	●	●		
		330-020E		3.3	4.5			0.2						●	●	●		
		350-020E		3.5	5.5			0.2						●	●	●		
		400-020E		4	5.5			0.2						●	●	●		
		430-020E		4.3	5.5			0.2						●	●	●		
	450-020E		4.5	6.5	5.55	4.6	0.2	21.66	9.54	-0.03	+0.03	●	●	●	Siger....E-EH			
	460-020E		4.6	6.5			0.2						●	●		●		
	500-020E		5	6.5			0.2						●	●		●		
	GEL 100-005E		1	2.5			0.05						●	●		●		
	150-010E		1.5	3			0.1						●	●		●		
	170-010E		1.7	3			0.1						●	●		●		
	185-010E		1.85	3			0.1						●	●		●		
	195-010E		1.95	3			0.1						●	●		●		
	200-010E		2	3.2			0.1						●	●		●		
	230-020E		2.3	3.2			0.2						●	●		●		
	250-020E		2.5	4.5			0.2						●	●		●		
	280-020E		2.8	4.5			0.2						●	●		●		
	300-020E		3	4.5			0.2						●	●		●		
	330-020E		3.3	4.5			0.2						●	●		●		
	350-020E		3.5	5.5			0.2						●	●		●		
	400-020E		4	5.5			0.2						●	●		●		
	500-020E		5	6.5			0.2						●	●		●		

Right-hand shown
CDX shows available grooving depth.

Recommended cutting conditions  G145

● : Standard item □ : Deleted from the next catalog

SIGE Excellent bar (Internal grooving)

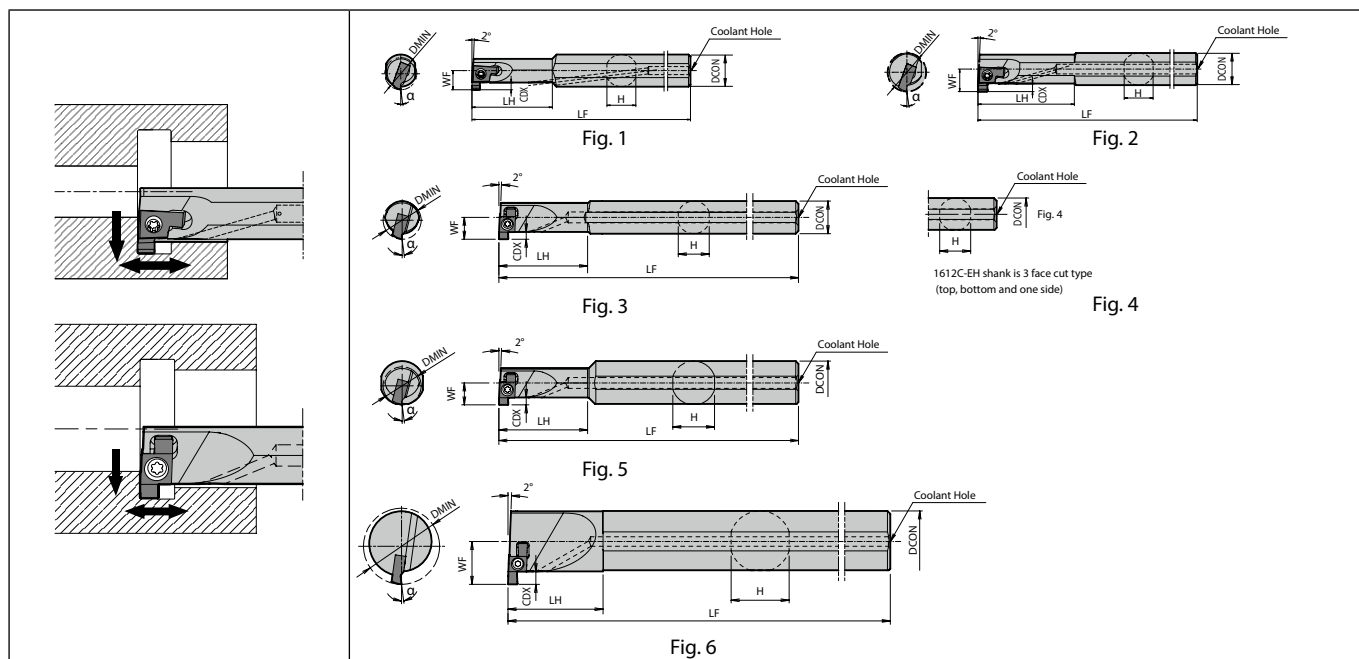

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		Dimension (mm)								Coolant hole	Fig.	Spare parts				Applicable inserts ➡ G78~G80
													Screw	Wrench	Wrench	Wrench	
	R	L	DMIN	DCON	CDX	H	LH	LF	WF								
SIGE%L 0808A-EH	●	●	8	8	1.5	7.2	20	100	4.8	Yes	1	SB-2045TRN	-	-	FT-6	GE%...A / AR	
SIGE%L 1010B-EH	●	●	10	10	2.2	9	25	125	6.2	Yes	1	SB-2255TR	-	DT-7	-	GE%...B GE%...BR	
1210B-EH	●	●	12						7		2						
SIGE%L 1412C-EH	●	●	14	12	2.5	11.4	33	150	8	Yes	3	SB-2570TR	-	-	FT-8	GE%...C GE%...CM GE%...CR	
1612C-EH	●	●	16						8.5		4						
1616C-EH	●	●		16	9	5											
SIGE%L 2020D-EH	●	●	20	20	4.5	19	40	180	12.1	Yes	5	SB-3080TR	-	-	FT-10	GE%...D / DM / DR	
SIGE%L 2525E-EH	●	●	25	25	6.5	30.4	24	45	200	15.6	Yes	5	SB-4085TR	FT-15	-	-	GE%...E GE%...EM
3232E-EH	●	●	32	55			220	19	5								
4032E-EH	●	●	40	45			250	23	6								

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

Applicable sleeve ➡ F155, F156

Features


Large chip pocket screw clamp toolholder design enables excellent chip evacuation



Cost effective chip control from a molded chipbreaker




Cutting edge is free from contact face



An 8mm minimum bore diameter with a 2-edge design

● : Standard item

SIGE Carbide shank bar (Internal grooving)

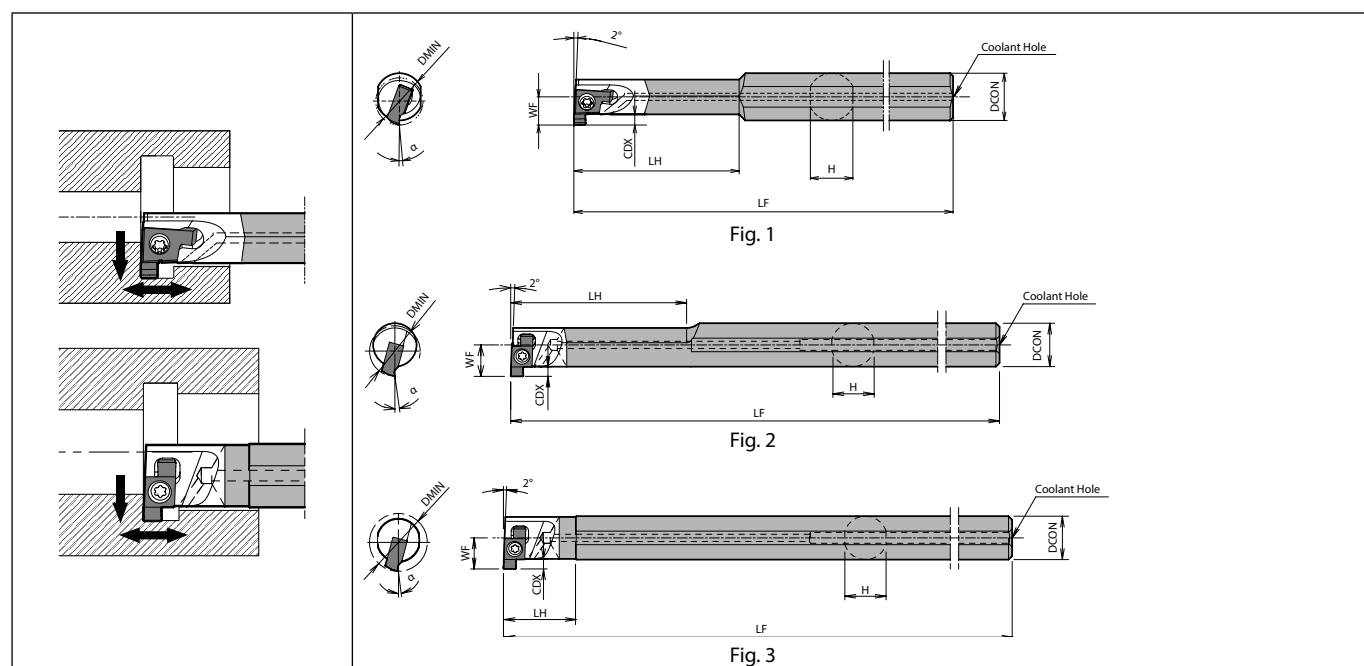

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions


Description		Availability		Dimension (mm)							Coolant hole	Fig.	Spare parts			Applicable inserts  G78,G79
													Screw	Wrench	Wrench	
		R	L	DMIN	DCON	CDX	H	LH	LF	WF						
SIGE%L 0808A-WH	●	●	8	8	1.5	7.2	28	125	4.8	Yes	1	SB-2045TRN	-	FT-6	GE%L...A / AR	
SIGEL%L 1010B-WH 1210B-WH	●	●	10	10	2.2	9	35	125	6.2	Yes	1	SB-2255TR	DT-7	-	GE%L...B GE%L...BR	
	●	●	12				45	140	7							
SIGEL%L 1412C-WH 1612C-WH	●	●	14	12	2.5	11.4	50	150	8.7	Yes	2 3	SB-2570TR	-	FT-8	GE%L...C GE%L...CM GE%L...CR	
	●	●	16				20	180	8.5							

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

Applicable sleeve F155, F156

● : Standard item

SIGE Carbide shank bar (Internal grooving / for automatic lathe)

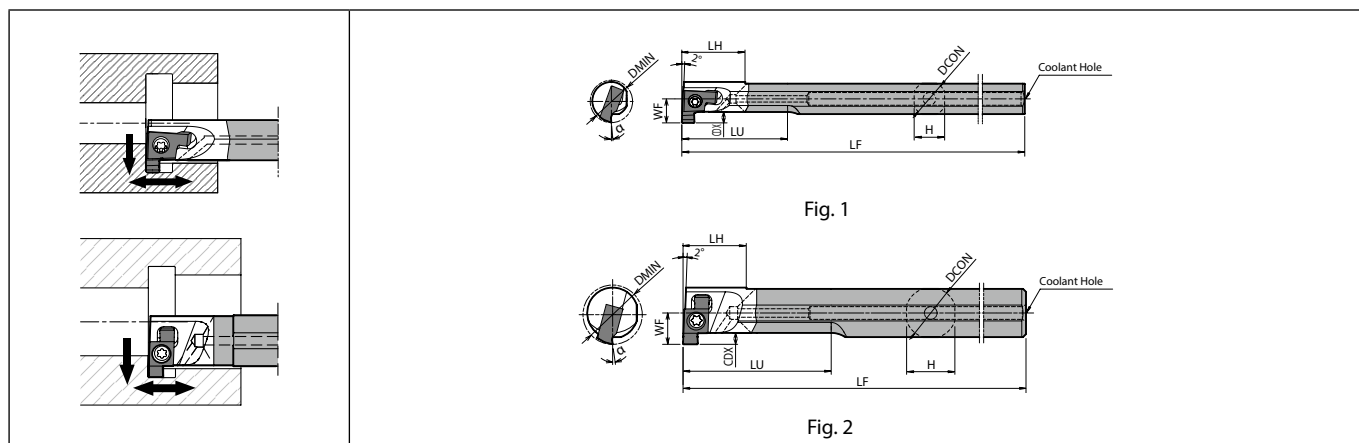

Right-hand shown | Right-hand Insert for Right-hand Toolholder.

Toolholder dimensions

Description		Availability	Dimension (mm)								Coolant hole	Fig.	Spare parts		Applicable inserts ➡ G78,G79
													Screw	Wrench	
			R	DMIN	DCON	CDX	H	LH	LF	LU			WF		
SIGER	1008B-WH-90	●	10	8	7.2	15	90	25	5.6	Yes	1	SB-225STR	FT-7	GER...B GER...BR	
	1210B-WH-90	●	12	10	9.4			30	6.6						
SIGER	1412C-WH-90	●	14	12	2.5	11.4	15	90	35	7.4	Yes	2	SB-2570TR	FT-8	GER...C / CM/ CR

CDX shows the distance from the toolholder to the cutting edge.

LH shows minimum overhang length.

Applicable sleeve ➡ F155, F156







Applicable Insert & Rake Angle (α) after Installment of Insert

Toolholder Description	Applicable Insert & Rake Angle (α) after Installment of Insert			
	Ground Chipbreaker	α	Molded Chipbreaker	α
SIGE [®] /L 0808A-EH	GE [®] /L 100-005A~GE [®] /L 200-010A GER100-050AR~GER200-100AR	5°	-	-
	GE [®] /L 100-005B~GE [®] /L 300-020B GER100-050BR~GER200-100BR	5°	-	-
	GE [®] /L 100-005C~GE [®] /L 350-020C GER200-100CR~GER300-150CR	8°	GER150-010CM~GER350-020CM	10°
	GE [®] /L 100-005D~GE [®] /L 400-020D GER200-100DR~GER300-150DR	9°	GER150-010DM~GER400-020DM	10°
	GE [®] /L 100-005E~GE [®] /L 500-020E	10°	GER150-010EM~GER500-020EM	10°
	2525E-EH			
	3232E-EH			
	4032E-EH			
SIGE [®] /L 0808A-WH	GE [®] /L 100-005A~GE [®] /L 200-010A GER100-050AR~GER200-100AR	5°	-	-
	GE [®] /L 100-005B~GE [®] /L 300-020B GER100-050BR~GER200-100BR	5°	-	-
	GE [®] /L 100-005C~GE [®] /L 350-020C GER200-100CR~GER300-150CR	8°	GER150-010CM~GER350-020CM	10°
	1010B-WH			
	1210B-WH			
	1008B-WH-90			
	1210B-WH-90			
	1412C-WH			
	1612C-WH			
	1412C-WH-90			

α indicates the rake angle at the center of the edge width after installing insert.

● : Standard item

GV

		Carbon steel / Alloy steel										●	●	●	●	P	
		Stainless steel										●	●	●	●	M	
		Cast iron										●	●	●	●	K	
		Non-ferrous metals										●	●	●	●	N	
		Titanium alloy										●	●	●	●	S	
		Hard materials (~40HRC)										●	●	●	●	H	
		Hard materials (40HRC ~)										●	●	●	●		
Insert		Description	No. of edges	Dimension (mm)						Tolerance (mm)		Carbide		Cer-met		Applicable toolholder ● G86~G88	
				CW	CDX	S	RE	INSL	W1	CW min.	CW max.	PVD	-	-	-		
												PR1225	PR930	KW10	TC40N		
		GVR	100-020SS 125-020SS 145-020SS 200-020SS 250-020SS 300-020SS	1								●	●	●	●	GIVR1216-1SS	
				1.25								●	●	●	●		
				1.45								●	●	●	●		
				2								●	●	●	●		
				2.5								●	●	●	●		
				3								●	●	●	●		
		GVL	100-020SS 125-020SS 145-020SS 200-020SS 250-020SS 300-020SS	1	2.3	3	0.2	9	3.6	-0.03	+0.03	●	●	●	●	GIVL1216-1SS	
				1.25								●	●	●	●		
				1.45								●	●	●	●		
				2								●	●	●	●		
				2.5								●	●	●	●		
				3								●	●	●	●		
		GVR	100-020S 125-020S 145-020S 185-020S 200-020S 250-020S 340-020S	1								●	●	●	●	GIVR1420-1S GIVR1412-1SE	
				1.25								●	●	●	●		
				1.45								●	●	●	●		
				1.85								●	●	●	●		
				2								●	●	●	●		
				2.5								●	●	●	●		
		GVL	100-020S 125-020S 145-020S 185-020S 200-020S 250-020S 340-020S	1	2.3	4	0.2	11	4	-0.03	+0.03	●	●	●	●	GIVL1420-1S GIVL1412-1SE	
				1.25								●	●	●	●		
				1.45								●	●	●	●		
				1.85								●	●	●	●		
				2								●	●	●	●		
				2.5								●	●	●	●		
		GVR	100-020A 125-020A 145-020A 185-020A 200-020A 250-020A 300-020A 340-020A	2								●	●	●	●	GIVR1620-1A GIVR1612-1AE GIVR1616-1AW	
				1.25								●	●	●	●		
				1.45								●	●	●	●		
				1.85								●	●	●	●		
				2								●	●	●	●		
				2.5								●	●	●	●		
		GVL	100-020A 125-020A 145-020A 185-020A 200-020A 250-020A 300-020A 340-020A	2	2.3	5	0.2	12	4	-0.03	+0.03	●	●	●	●	GIVL1620-1A GIVL1612-1AE GIVL1616-1AW	
				1.25								●	●	●	●		
				1.45								●	●	●	●		
				1.85								●	●	●	●		
				2								●	●	●	●		
				2.5								●	●	●	●		









Right-hand shown
CDX shows available grooving depth.

Recommended cutting conditions ● G146

● : Standard item

G84

GV

			Carbon steel / Alloy steel										●	☺					P
			Stainless steel										●	☺					M
			Cast iron												●				K
			Non-ferrous metals												●			●	N
			Titanium alloy												●			●	S
			Hard materials (~ 40HRC)																H
			Hard materials (40HRC ~)																
Insert		Description	No. of edges	Dimension (mm)						Tolerance (mm)		Carbide		Cer- met	PCD	Applicable toolholder ☞ G86~G88			
				CW	CDX	S	RE	INSL	W1	CW min.	CW max.	PVD	-	-	-				
												PR125 PR930	KW10	TC40N TC60M	KPD010				
	 2-edge	GVR 145-020B	2	1.45	2.8								●	●	●	●	GIVR2025-1B GIVR2016-1BE GIVR2020-1BW		
		GVR 185-020B		1.85	2.8							●	●	●	●				
		GVR 200-020B		2	3.2							●	●	●	●				
		GVR 230-020B		2.3	3.2							●	●	●	●				
		GVR 250-020B		2.5	3.2							●	●	●	●				
		GVR 280-020B		2.8	3.2							●	●	●	●				
		GVL 300-020B		3	4.2							●	●	●	●	GIVR2025-2B GIVR2016-2BE GIVR2020-2BW			
		GVL 340-020B		3.4	4.2							●	●	●	●				
		GVL 400-020B		4	4.2	5.5	0.2	15	4.5	-0.03	+0.03	●	●	●	●				
		GVL 145-020B		1.45	2.8							●	●	●	●				
		GVL 185-020B		1.85	2.8							●	●	●	●				
		GVL 200-020B		2	3.2							●	●	●	●				
	 2-edge	GVR 230-020B	2	2.3	3.2								●	●	●	GIVL2025-1B GIVL2016-1BE GIVL2020-1BW			
		GVR 250-020B		2.5	3.2							●	●	●	●				
		GVR 280-020B		2.8	3.2							●	●	●	●				
		GVR 300-020B		3	4.2							●	●	●	●				
		GVR 400-020B		4	4.2							●	●	●	●				
		GVR 280-020C		2.8	4.5							●	●	●	●				
		GVL 300-020C		3	4.5							●	●	●	●	GIVL2025-2B GIVL2016-2BE GIVL2020-2BW			
		GVL 340-020C		3.4	5.5							●	●	●	●				
		GVL 400-020C		4	5.5							●	●	●	●				
		GVL 430-020C		4.3	6.3							●	●	●	●				
		GVL 460-020C		4.6	6.3							●	●	●	●				
		GVL 500-020C		5	6.3							●	●	●	●				
	 1-edge	GVR 145-020A	1	1.45	2.3	5	0.2	12	4	-0.03	+0.03				●	GIVR1620-1A GIVR1612-1AE GIVR1616-1AW			
		GVR 200-020A		2										●					
		GVR 200-020B	1	2	3.2	5.5	0.2	15	4.5	-0.03	+0.03				●	GIVR2025-1B GIVR2016-1BE GIVR2020-1BW			
		GVR 250-020B		2.5										●					
			 2-edge / Full R	GVL 200-100AR	2	2	2.3	5	1.25 1.5 1	12	4	-0.03	+0.03	●	●	●	●	GIVR1620-1A GIVR1612-1AE GIVR1616-1AW	
				GVL 250-125AR		2.5								●	●	●	●		
GVL 300-150AR	3			●		●								●	●				
GVL 200-100AR	2									●	●			GIVL1620-1A GIVL1612-1AE GIVL1616-1AW					
GVR 200-100BR	2			2	3.2	5.5	1	15	4.5	-0.03	+0.03	●	●		●	●	GIVR2025-1B GIVR2016-1BE GIVR2020-1BW		
				GVR 300-150BR	3	4.2		1.5					●		●	●		●	

Right-hand shown
CDX shows available grooving depth.


Recommended cutting conditions ● G146

● : Standard item

CBN & PCD Inserts are
sold in 1 piece boxes



GIV Steel shank bar (Internal grooving)

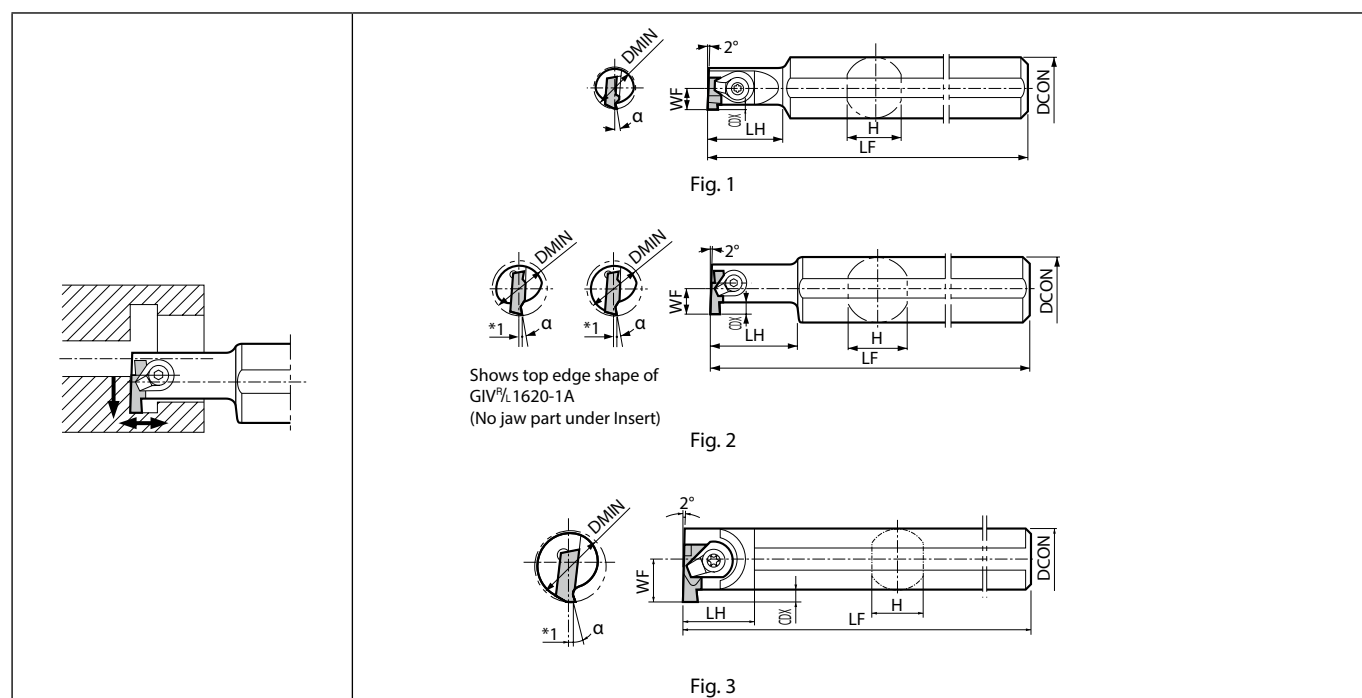

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description		Availability		Dimension (mm)								Fig.	Spare parts					Applicable inserts ➡ G84,G85	
													Clamp set	Clamp set	Wrench	Wrench	Wrench		
		R	L	DMIN	DCON	CDX	H	LH	LF	WF									
GIV%L 1216-1SS	●	●	12	16	2.2	15	20	150	6	1	CPS-4V	-	-	-	FT-10	GV%L....-020SS			
GIV%L 1420-1S	●	●	14	20	2.2	19	24	150	7	1	CPS-5F	-	-	FT-15	-	GV%L....-020S			
GIV%L 1620-1A	●	●	16	20	2.2	19	28	160	8	2	CPS-5V	-	-	FT-15	-	GV%L....-...A(R)			
GIV%L 2025-1B	●	●	20	25	*1 2.8	23	35	180	10	2	CPS-5V	-	-	FT-15	-	GV%L 145 ~ 250-...B(R)			
2025-2B	●	●			*2 3.2											GV%L 280 ~ 400-...B(R)			
GIV%L 2532-1C	●	●	25	32	*3 4,5	30	43	200	12.5	2	-	CPS-6V	LW-3	-	-	GV%L 280 ~ 340-020C			
2532-2C	●	●			*4 5,5											GV%L 400 ~ 500-020C			
3232-1C	●	●	32	32	*3 4,5	52	220	16								GV%L 280 ~ 340-020C			
3232-2C	●	●			*4 5,5											GV%L 400 ~ 500-020C			
GIV%L 4032-1C	●	●	40	32	*3 4,5	30	43	250	21	3	-	CPS-6V	LW-3	-	-	GV%L 280 ~ 340-020C			
4032-2C	●	●			*4 5,5											22.2	GV%L 400 ~ 500-020C		

GIV are designed to set the cutting edge height 1mm above the center height.

CDX shows available grooving depth.

*1. GV%L 200~250-020B Insert can be used up to a Groove Depth 3.2mm.

*2. GV%L 300~400-020B Insert can be used up to a Groove Depth 4.2mm.


*3. GV%L 340-020C Insert can be used up to a Groove Depth 5.5mm.

*4. GV%L 430~500-020C Insert can be used up to a Groove Depth 6.3mm.

If you need any of insert groove depth specified in *1 to *4, modify the dimension CDX of toolholder.

● : Standard item

GIV-E Excellent bar (Internal grooving)

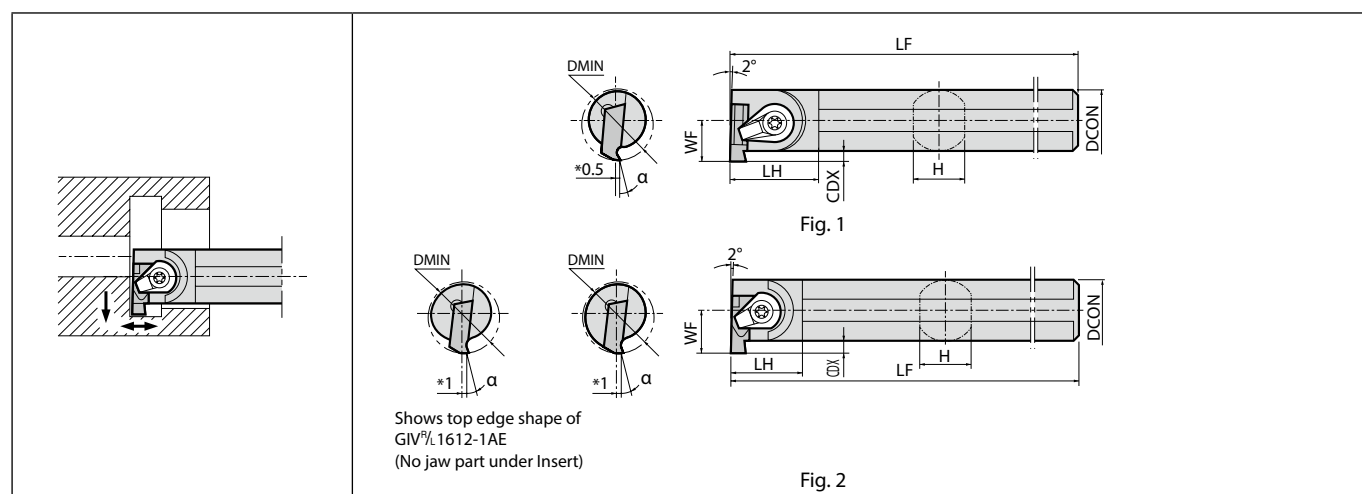

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description		Availability		Dimension (mm)							Fig.	Spare parts				Applicable inserts 🔧 G84,G85
												Clamp set	Clamp set	Wrench	Wrench	
		R	L	DMIN	DCON	CDX	H	LH	LF	WF						
GIV%L 1412-1SE	●	●	14	12	1.7	11.4	18	150	7.7	1	CPS-5F	-	-	FT-15	GV%L...-020S	
GIV%L 1612-1AE	●	●	16	12	2.2	11.4	19	150	8.2	2	CPS-5V	-	-	FT-15	GV%L...-...A(R)	
GIV%L 2016-1BE	●	●	20	16	^{*1} 2.8	15.2	20	180	11.2	2	CPS-5V	-	-	FT-15	GV%L 145 ~ 250-...B(R)	
2016-2BE	●	●			^{*5} 3.2		19		11.7						GV%L 280 ~ 400-...B(R)	
GIV%L 2520-1CE	●	●	25	20	^{*6} 4.5	19	25	200	14.5	2	-	CPS-6V	LW-3	-	GV%L 280 ~ 340-020C	
2720-2CE	●	●	27		^{*4} 5.5		16.2		GV%L 400 ~ 500-020C							
3225-1CE	●	●	32	25	^{*7} 4.5	24	24	220	17.5						GV%L 280 ~ 340-020C	
3225-2CE	●	●			^{*4} 5,5	18.7	GV%L 400 ~ 500-020C									
4032-1CE	●	●	40	32	^{*7} 4.5	31	29	240	21						GV%L 280 ~ 340-020C	
4032-2CE	●	●			^{*4} 5,5	22.2	GV%L 400 ~ 500-020C									

GIV-E are designed to set the cutting edge height 1mm above the center height. (0.5mm for GIV%L 1612-1AE)

CDX shows available grooving depth.

*1. GV%L 200~250-020B Insert can be used up to a Groove Depth 3.2mm.


*4. GV%L 430~500-020C Insert can be used up to a Groove Depth 6.3mm.

*5. GV%L 300~400-020B Insert can be used up to a Groove Depth 3.8mm. (When using GIV%L 2016-2BE)

*6. GV%L 340-020C Insert can be used up to a Groove Depth 4.7mm. (When using GIV%L 2520-1CE)

*7. GV%L 340-020C Insert can be used up to a Groove Depth 5.3mm. (When using GIV%L 3225-1CE, GIV%L 4032-1CE)

If you need any of insert groove depth specified in *1 to *7, modify the dimension CDX of toolholder.

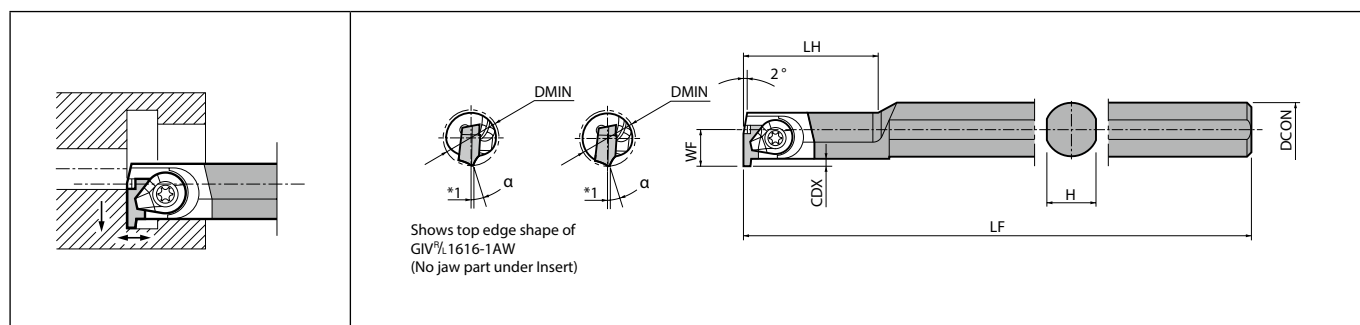GIV-W Carbide shank bar (Internal grooving)

Right-hand shown | Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		Dimension (mm)								Spare parts				Applicable inserts G84,G85
											Clamp set	Clamp set	Wrench	Wrench	
	R	L	DMIN	DCON	CDX	H	LH	LF	WF						
GIV [®] /L 1616-1AW	●	●	16	16	2.2	15	48	175	10.6	CPS-5V	-	-	FT-15	-	GV [®] /L...-...A(R)
GIV [®] /L 2020-1BW	●	●	20	20	^{*1} 2.8	19	60	220	14.6	CPS-5V	-	-	FT-15	-	GV [®] /L 145 ~ 250-...B(R)
GIV [®] /L 2020-2BW	●	●			^{*2} 3.2										GV [®] /L 280 ~ 400-...B(R)
GIV [®] /L 2525-1CW	●	●	25	25	^{*3} 4.5	24	70	260	19.1	-	CPS-6V	LW-3	-	-	GV [®] /L 280 ~ 340-020C
GIV [®] /L 2525-2CW	●	●			^{*4} 5.5										GV [®] /L 400 ~ 500-020C

GIV-W are designed to set the cutting edge height 1mm above the center height.

CDX shows available grooving depth.


*1. GV[®]/L 200~250-020B Insert can be used up to a Groove Depth 3.2mm.*2. GV[®]/L 300~400-020B Insert can be used up to a Groove Depth 4.2mm.*3. GV[®]/L 340-020C Insert can be used up to a Groove Depth 5.5mm.*4. GV[®]/L 430~500-020C Insert can be used up to a Groove Depth 6.3mm.

If you need any of insert groove depth specified in *1 to *4, modify the dimension CDX of toolholder.

Applicable Insert & Rake Angle (α) after Installment of Insert

Toolholder Description	Insert Description G84,G85		Rake Angle (α)	
	General Grooving (Square)	Full-R Grooving (Round)	TC40N	TN90,TC60M PR930,PR1225 KW10
GIV [®] /L...1SS	GV [®] /L 100~300-020SS	-	10°	15°
GIV [®] /L...1S	GV [®] /L 100~340-020S	-	10°	15°
GIV [®] /L...1SE	GV [®] /L 100~340-020S	-	3°	8°
GIV [®] /L...1A(□)	GV [®] /L 100~340-020A	GV [®] /L 200-100AR~300-150AR	3°	8°
GIV [®] /L...1B(□)	GV [®] /L 145~250-020B	GV [®] /L 200-100BR	4°	9°
GIV [®] /L...2B(□)	GV [®] /L 280~400-020B	GV [®] /L 300-150BR		
GIV [®] /L...1C(□)	GV [®] /L 280~340-020C	-	5°	10°
GIV [®] /L...2C(□)	GV [®] /L 400~500-020C	-		

● : Standard item

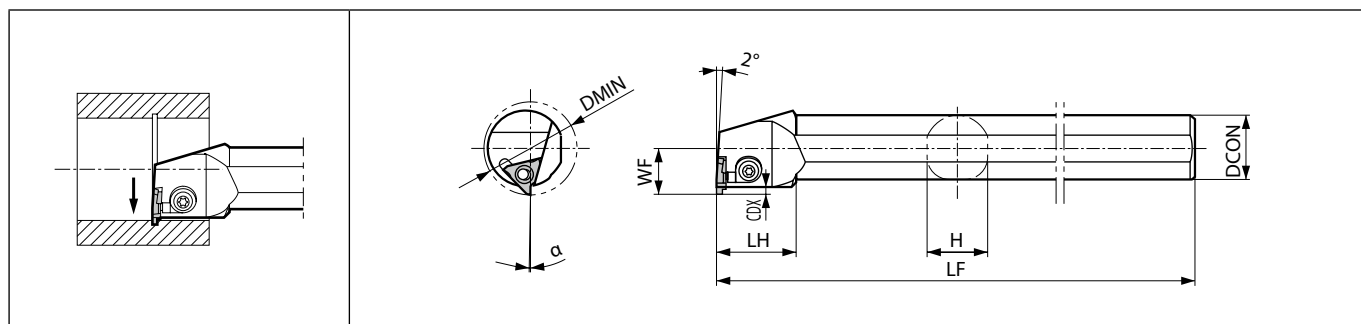KIGBA (Internal grooving / Shallow grooving)

Right-hand shown | Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		Dimension (mm)								Spare parts		Applicable inserts G6~G12
											Clamp set	Wrench	
	R	L	DMIN	DCON	CDX	H	LH	LF	WF				
KIGBA [®] / 3525-16	●	●	35	25	2.8	23	30	220	17.5	LGBA-16 ¹ / ₈ S	FT-15		GBA32 ¹ / ₈ type
KIGBA [®] / 4032-22	●	●	40	32	3	30	30	250	23	LGBA-22 ¹ / ₈ S	FT-15		GBA43 ¹ / ₈ type


CDX shows the distance from the toolholder to the cutting edge.

Available Grooving Depth depends on the insert.

KIGBA[®]/ 3525-16 : CDX of the applicable insert (GBA32)

4032-22 : CDX of the applicable insert (GBA43) (1) 2.0 mm (CDX < 3.0 mm) (2) 3.0 mm (CDX ≥ 3.0 mm)

Clamp Set : LGBA-○○LS for Right-hand Toolholder, and LGBA-○○RS for Left-hand Toolholder.

**Rake Angle (α) after Installment of GBA insert**

GBA32 [®] /L○○○-○○○		GBA43 [®] /L○○○-○○○		GBA43 [®] /L○○○-○○○R (Full-R)		
α	Insert Grades	α	Insert Grades	α	Insert Grades	Full-R Description
+1°	TN620, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930 KPD001, KPD010	-9°	KBN510, KBN525	+1°	TN620, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930	050R~150R
		+1°	TN620, TC40N, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930 KPD001, KPD010		TN620, TN90, PV7040 PR1215, PR1625, PR2015, PR2025 PR905, PR930	200R
+11°	KW10	+11°	KW10	+5°	KW10	050R~200R




Rake Angle (α) after Installment of GBA-GM insert

α	Insert Description
+1°	GBA43 [®] /L 150-020GM
+6°	GBA43 [®] /L 175-020GM
	GBA43 [®] /L 265-030GM
+3°	GBA43 [®] /L 300-030GM
	GBA43 [®] /L 400-040GM

α indicates the rake angle at the center of the edge width, after installing insert.

● : Standard item


GDM/GDG

			Carbon steel / Alloy steel						☺	☹	☹	☹	☹	☹	P	
			Stainless steel						☺	☹	☹	☹	☹	M		
			Cast iron						☹	☹	☹	☹	☹	K		
			Non-ferrous metals						☹	☹	☹	☹	☹	N		
			Titanium alloy						☹	☹	☹	☹	☹	S		
			Hard materials (~ 40HRC)						☹	☹	☹	☹	☹	H		
			Hard materials (40HRC ~)						☹	☹	☹	☹	☹			
Insert		Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide			Cer- met	Applicable toolholder G91		
				CW	S	RE	INSL	CW min.	CW max.	PVD			-		-	
										PR1215	PR1225	PR1535	GW15		TN620	TN90
		GDM 2013N-020GMI	2	2	4.3	0.2	13.5	- 0.03	+ 0.03	●	●	●	●	KGDI®/L...-2		
		GDM 3015N-040GMI	2	3	4.6	0.4	15.5	- 0.03	+ 0.03	●	●	●	●	KGDI®/L...-3		
		GDM 4020N-040GMI	2	4	4.3	0.4	20	- 0.03	+ 0.03	●	●	●	●	KGDI®/L...-4		
		GDM 5020N-040GMI 5020N-080GMI	2	5	4.3	0.4 0.8	20	- 0.04	+ 0.04	●	●	●	●	KGDI®/L...-4 KGDI®/L...-5		
		GDG 3015N-020GS	2	3	4.6	0.2	15.6	- 0.02	+ 0.02	●	●	●	●	KGDI®/L...-3		
		GDG 4020N-040GS	2	4	4.3	0.4	20	- 0.02	+ 0.02	●	●	●	●	KGDI®/L...-4		
		GDG 5020N-040GS	2	5	4.3	0.4	20	- 0.02	+ 0.02	●	●	●	●	KGDI®/L...-4 KGDI®/L...-5		
		GDM 3015N-150R-CM	2	3	4.6	1.5	16.3	- 0.03	+ 0.03	●	●	●	●	KGDI®/L...-3		
		GDM 4020N-200R-CM	2	4	4.3	2	20	- 0.03	+ 0.03	●	●	●	●	KGDI®/L...-4		
		GDM 5020N-250R-CM	2	5	4.3	2.5	21	- 0.04	+ 0.04	●	●	●	●	KGDI®/L...-4 KGDI®/L...-5		

Recommended cutting conditions ➡ G147

● : Standard item

G90

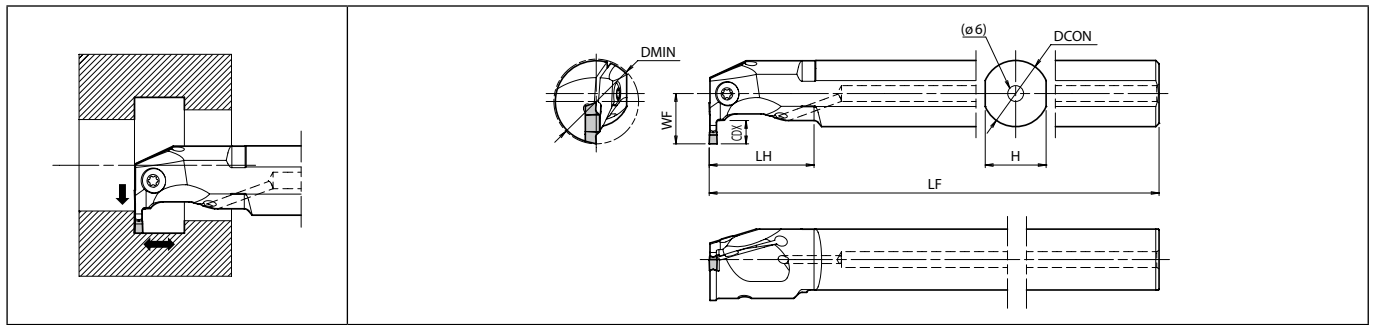KGDI (Internal grooving)


Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)											Coolant hole	Spare parts				Applicable inserts ➡ G90
															Clamp screw (Torx)	Screw	Wrench	Wrench	
	R	L	DMIN			DCON	CDX	H	LH	LF	WF	CW min.	CW max.						
KGDI ¹ /L 1816B-2 2520B-2 3225B-2	●	●	18			16	4.5	15	25	150	9.5	2	2	Yes	-	GS-50	LW-3	-	GDM2013N-020GMI
	●	●	25	-	-	20	6	18	30	180	14.5				SB-STR	-	-	LTW-20	
	●	●	32			25	7	23	40	200	19								
KGDI ¹ /L 2016B-3 2520B-3 3225B-3	●	●	20	21		16	5.5	15	25	150	11.5	3	3	Yes	-	GS-50	LW-3	-	GDM3015N-... GDG3015N-...
	●	●	25	26	-	20	6	18	30	180	14.5				SB-STR	-	-	LTW-20	
	●	●	32	33		25	8	23	40	200	19								
KGDI ¹ /L 3225B-4 4032B-4	●	●	32	40	34	25	8.5	23	40	200	19	4	5	Yes	SB-STR	-	-	LTW-20	GDM4020N-... GDG4020N-...
	●	●	40	48	42	32	11	29	50	220	23.5								
KGDI ¹ /L 3225B-5 4032B-5	●	●	32	37	34	25	8.5	23	40	200	19	5	5	Yes	SB-STR	-	-	LTW-20	GDM5020N-... GDG5020N-...
	●	●	40	45	42	32	11	29	50	220	23.5								

* Possible by slightly chamfering toolholder's tip about 0.5 mm

Additional processing of toolholder tip when
CM chipbreaker is installed




* By slightly chamfering the holder tip of about 0.5 mm,
the cutting diameter can be minimized.

GH/GHU

Cutting edge preparation				Carbon steel / Alloy steel										P				
				Stainless steel										M				
				Cast iron										K				
				Non-ferrous metals										N				
				Titanium alloy										S				
Symbol	Specification	Example		Hard materials (~ 40HRC)										H				
S	Chamfered and R-honed	S01020	0.10mm × 20° chamfered and R-honed	Hard materials (40HRC ~)														
T	Chamfered	T01020	0.10mm × 20° chamfered															
Insert		Description		Edge preparation type	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide		Ceramic		Cermet		Applicable toolholder G93
						CW	S	RE	INSL	CW min.	CW max.	CVD CR9025 PR930 KW10	PVD - Ag6N PT600M	PVD - A65 TC40N TC60M TN60	- 			

Recommended cutting conditions G65

● : Standard item

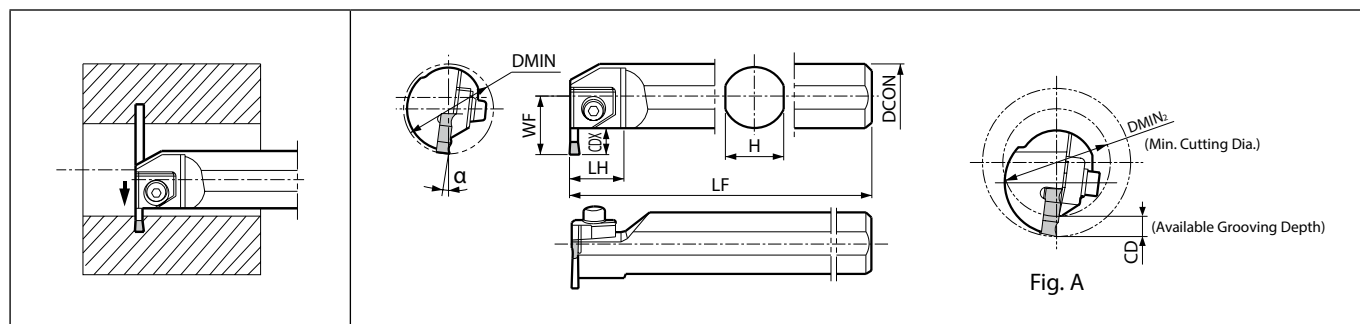KIGH (Internal grooving / Deep grooving)

Right-hand shown

Toolholder dimensions

Description	Availability	Dimension (mm)								Spare parts					Applicable inserts G92
										Clamp	Clamp bolt	Spring	Washer	Wrench	
		R	DMIN	DCON	CDX	H	LH	LF	WF						
KIGHR 4532B-4	●	45	32		30		200	28.2		CGH-1L	HH6X25	SP-6	W-6	LW-5	GH4020-... / GHU40-... GH4520-...
5540B-4	●	55	40	12	38	27	250	32.3							
6550B-4	●	65	50		48		300	37.3							
KIGHR 4532B-5	●	45	32		30		200	28.2		CGH-1L	HH6X25	SP-6	W-6	LW-5	GH5020-... / GHU50-... / GH5520-... GH6020-... / GHU60-... / GH6520-...
5540B-5	●	55	40	12	38	27	250	32.3							
6550B-5	●	65	50		48		300	37.3							
KIGHR 5540B-7	●	55	40	12	38	27	250	32.3		CGH-2L	HH6X25	SP-6	W-6	LW-5	GH7020-... / GH7520-... / GH8020-...

CDX shows the distance from the toolholder to the cutting edge. For the available grooving depth (CD), ref. to „List of Min. Available Cutting Diameter and Groove Depth“.

LH depends on the insert's edge width.

Rake Angle (α) after Installment of GH / GHU insert

GH○○○○○○○		GHU○○○○○	
α	Insert Grades	α	Insert Grades
-5°	A65, A66N, PT600M	+5°	TN60 CR9025
+5°	TC40N		
+15°	TN90, TC60M PR930 KW10		

List of the Min. Cutting Diameter and Grooving Depth (Refer to Fig. A)


Toolholder Description		DMIN: (Min. Cutting Dia.)					
KIGHR	4532B-○	ø110	ø70	ø65	ø60	ø55	ø45
	5540B-○	ø70	ø60	ø55			
	6550B-○	ø65					
Available Grooving Depth CD (mm)		12	11.5	11	10	9	Under 8

Insert		Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide					Cermat	Applicable toolholder G95	
				CW	S	RE	INSL	CW min.	CW max.	CVD	PVD			- KV10			- TN90
											PR905	PR915	PR930				
Sharp cutting oriented / Precision class (ground chipbreaker)		GMG 8030-050MG	2	8	5.5	0.5	30	- 0.03	+ 0.03	○	○		○	○			
Full R / Sharp cutting oriented / Precision class		GMGA 8030-400R	2	8	5.5	4	30	- 0.02	+ 0.02					○			
Chip control oriented / M class		GMM 8030-080MW	2	8	5.5	0.8	30	- 0.05	+ 0.05	○	○	○	○	○			

If using a full-R insert with KIGM-8 toolholder, you need to modify the corner of insert adapter of toolholder.

Recommended cutting conditions ➡ **G143**

○: Will be replaced with a new product

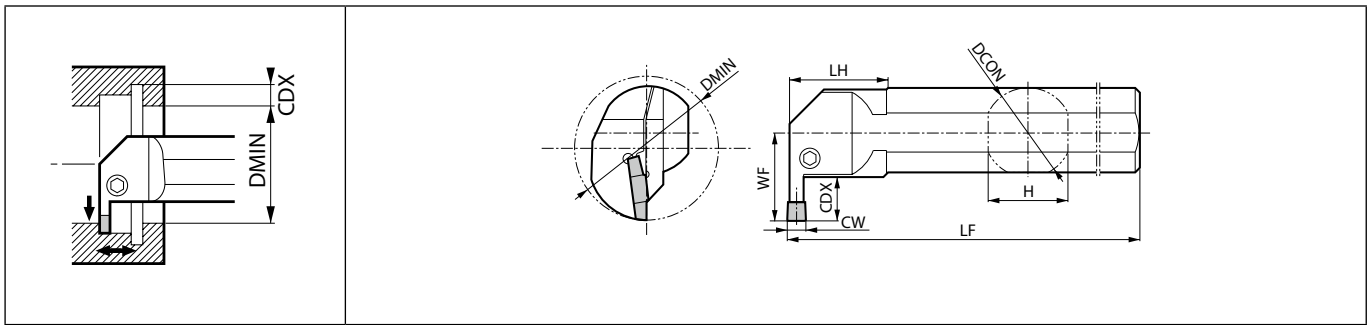
KIGM-8 (Internal grooving)

Right-hand shown

Toolholder dimensions

Description	Availability		Dimension (mm)										Spare parts		Applicable inserts ➔ G94
													Clamp bolt	Wrench	
	R	L	DMIN	DCON	CDX	H	LH	LF	WF	CW min.	CW max.				
KIGM%L 6540B-8	○	○	65	40	20	36	41	300	41	8	8	HH6X20	LW-5		GM..8030-...

CDX shows available grooving depth.

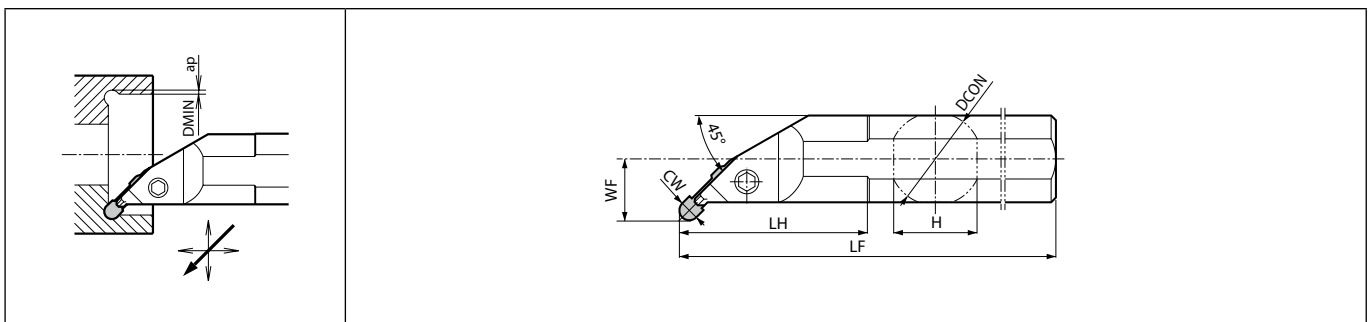**KIGMU-8** (Internal grooving / Undercut grooving)

Right-hand shown


Toolholder dimensions

Description	Availability		Dimension (mm)										Spare parts		Applicable inserts ➔ G94
													Clamp bolt	Wrench	
	R	DMIN	DCON	H	LH	ap	LF	WF	CW min.	CW max.					
KIGMUR 6540B-8	○	65	40	36	83	2.2	300	26	8	8	HH6X20	LW-5			GM..8030-...

ap shows the distance from the internal face of the workpiece.

○ : Will be replaced with a new product

GIA

		Carbon steel / Alloy steel						●	○	P		
		Stainless steel						●	○	M		
		Cast iron								K		
		Non-ferrous metals								N		
		Titanium alloy								S		
		Hard materials (~ 40HRC)						●	○	H		
		Hard materials (40HRC ~)										
Insert	Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide	Cermet	Applicable toolholder ➡ G97	
			CW	S	RE	INSL	CW min.	CW max.	CVD	-		
									CP9025	TN60		
		GIA 30	2	3	5	0.2	25	- 0.05	+ 0.05	○	○	KGIA3232B-3 KGIA4332B-3 KGIA5140B-3
		GIA 40	2	4	5	0.25	25	- 0.05	+ 0.05	○	○	KGIA3232B-4 KGIA4332B-4 KGIA5140B-4
		GIA 50	2	5	5	0.3	30	- 0.05	+ 0.05	○	○	KGIA5640B-5 KGIA6650B-5


Molded Chipbreaker

Recommended cutting conditions

Workpiece material	Recommended insert grades (Vc: m/min)		(1) f for grooving (mm/rev) (2) f for turning (mm/rev) (3) ap for turning (mm)			Remarks
	Cermet	CVD Coated carbide	GIA 30	GIA 40	GIA 50	
	TN60	CR9025				
Carbon steel	☆ 60~120	★ 60~120	(1) 0.04~0.08 (2) 0.02~0.08 (3) Max. 0.3	(1) 0.04~0.09 (2) 0.02~0.08 (3) Max. 0.4	(1) 0.05~0.1 (2) 0.05~0.08 (3) Max. 0.5	Coolant
Alloy steel	☆ 60~100	★ 60~100	(1) 0.04~0.07 (2) 0.02~0.07 (3) Max. 0.3	(1) 0.04~0.07 (2) 0.02~0.07 (3) Max. 0.4	(1) 0.05~0.08 (2) 0.05~0.08 (3) Max. 0.5	
Stainless steel	-	★ 60~80	(1) 0.04~0.07 (2) 0.02~0.07 (3) Max. 0.3	(1) 0.04~0.07 (2) 0.02~0.07 (3) Max. 0.4	(1) 0.05~0.08 (2) 0.05~0.08 (3) Max. 0.5	

★ : 1st recommendation ☆ : 2nd recommendation

○ : Will be replaced with a new product

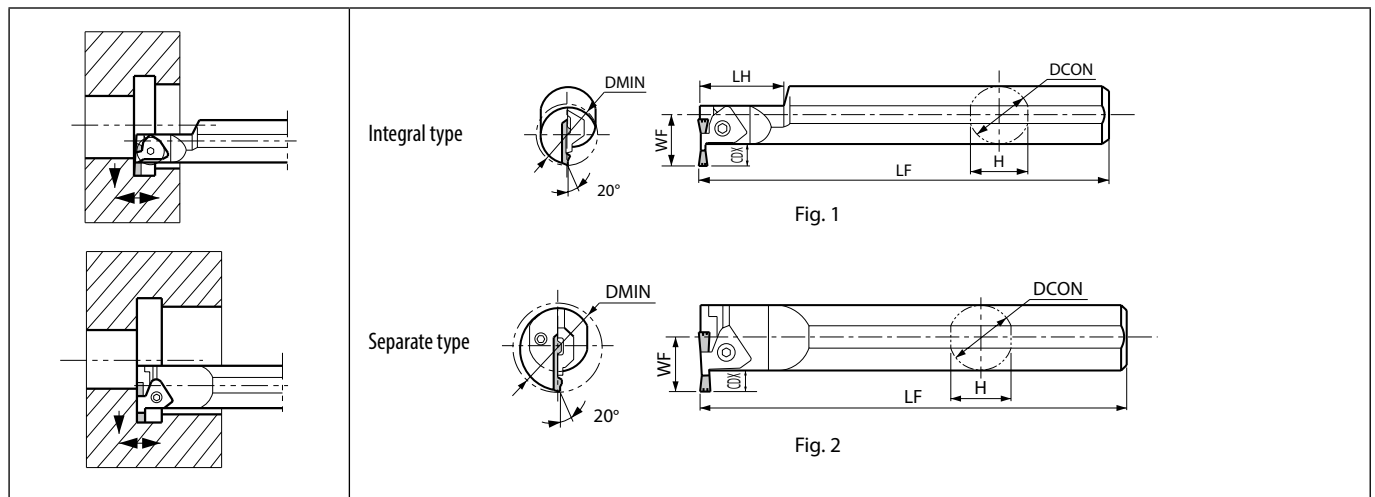KGIA (Internal grooving / Deep grooving)

Right-hand shown

Toolholder dimensions

Description		Availability	Dimension (mm)								Fig.	Spare parts				Applicable inserts 			
												Clamp bolt	Clamp	Spring	Wrench				
			R	DMIN	DCON	CDX	H	LH	LF	WF									
KGIAR 3232B-3 4332B-3 5140B-3	 32	32	10	30.4	45	200	26.5	1	HH5X15	CGIA-3R	SP-5	LW-4	GIA30						
	 43													30	-	250	26.3	30.3	2
	 51																		
KGIAR 3232B-4 4332B-4 5140B-4	 32	32	10	30.4	45	200	26.5	1	HH5X15	CGIA-4R	SP-5	LW-4	GIA40						
	 43													30	-	250	26.3	30.3	2
	 51																		
KGIAR 5640B-5 6650B-5	 56	40	15	38	-	250	35.3	2	HH5X15	CGIA-5R	SP-5	LW-4	GIA50						
	 66	50												48	300	40.3			

CDX shows available grooving depth.

Composition

Type	Spare Parts		Toolholder	Blade	Clamp Screw	Wrench
	Toolholder Description					
Integral Type	KGIA	3232B-3	-	-	-	-
Separate Type		4332B-3	KGIA32H	BGIAR43-3	SB-40140TR	FT-15
		5140B-3	KGIA40H	BGIAR51-3		
Integral Type		3232B-4	-	-	-	-
Separate Type		4332B-4	KGIA32H	BGIAR43-4	SB-40140TR	FT-15
		5140B-4	KGIA40H	BGIAR51-4		
Separate Type		5640B-5	KGIA40H	BGIAR56-5	SB-40140TR	FT-15
		6650B-5	KGIA50H	BGIAR66-5		

○ : Will be replaced with a new product

External dia. of the groove DAXN / DAXX

External dia. of the groove within DAXN ~ DAXX are the available range for the initial grooving on the unprocessed workpiece (Ref. to Fig. 1)







Fig.1

Caution for face grooving

1. When face grooving, the suitable toolholder depends on the length of the boss

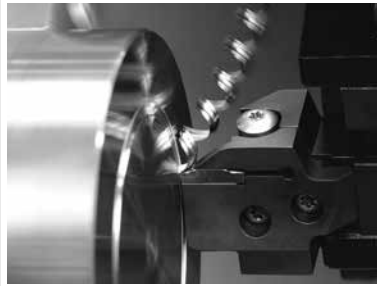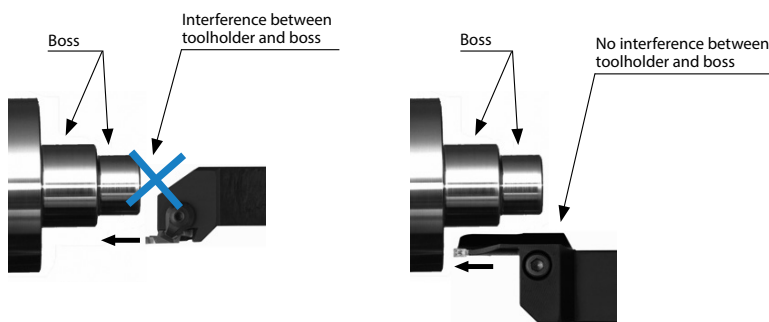


2. Selection of face grooving toolholder

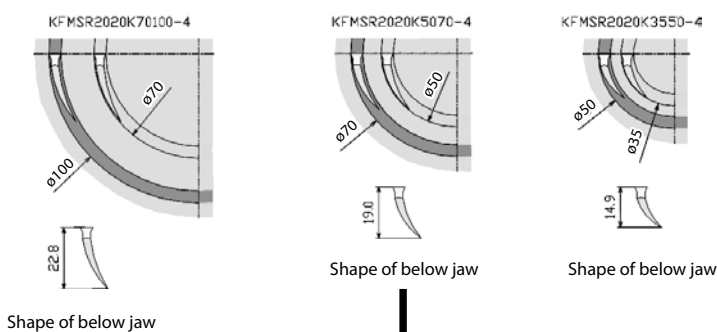


Wider grooving (turning) should be performed from the outside inwards

3. Interference of face grooving toolholder


e.g.) KFMSR2525M70100-4

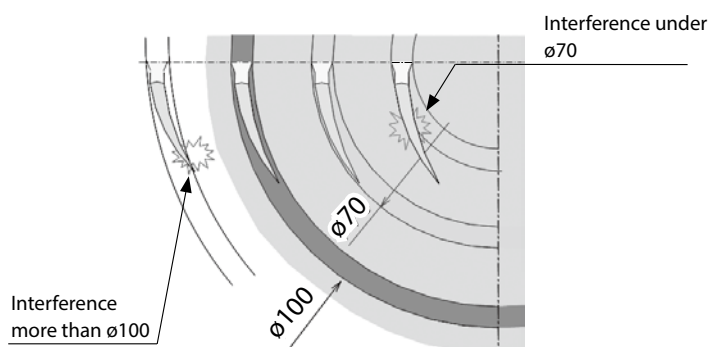

Good



Bad




Example of usage for the face grooving toolholder


When face grooving, KFMSR2525M70100-4 should be between $\phi 70 \sim \phi 100$ for grooving the outer diameter at first. If the workpiece is machined at a diameter $\phi 100$ or $\phi 70$, the jaw of toolholder interferes with the workpiece.

Small diameter face grooving $\phi 6\sim$ 


Type	STW
External dia. of the groove (min.)	$\phi 6$
Edge width (mm)	0.5~2.0
Grooving depth (mm)	1.0~3.0
See Page	G106

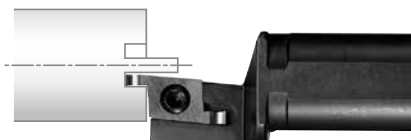

Type	S..-STW
External dia. of the groove (min.)	$\phi 6$
Edge width (mm)	0.5~2.0
Grooving depth (mm)	1.0~3.0
See Page	G107




Type	STWS
External dia. of the groove (min.)	$\phi 6$
Edge width (mm)	0.5~2.0
Grooving depth (mm)	1.0~3.0
See Page	G109



Small diameter face grooving $\phi 8\sim$ 

Type	GFVS-AA
External dia. of the groove (min.)	$\phi 8$
Edge width (mm)	1.0~3.0
Grooving depth (mm)	2.2
See Page	G125

Type	GFVT-AA
External dia. of the groove (min.)	$\phi 8$
Edge width (mm)	1.0~3.0
Grooving depth (mm)	2.2
See Page	G125

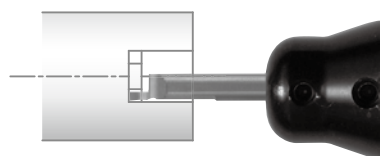Small diameter face grooving $\phi 5\sim, \phi 8\sim$ 

Type	EZFG
External dia. of the groove (min.)	$\phi 5, \phi 6, \phi 8$
Edge width (mm)	1.0~3.0
Grooving depth (mm)	1.5~3.0
See Page	G102




Type	VNFG
External dia. of the groove (min.)	$\phi 8$
Edge width (mm)	1.0~3.0
Grooving depth (mm)	2.0~3.0
See Page	G104





Face grooving $\phi 20\sim$ 

Type	KFTB
External dia. of the groove (min.)	$\phi 65\sim\phi 250$
Edge width (mm)	4.0~5.0
Grooving depth (mm)	25~38
See Page	G140




Type	GFV
External dia. of the groove (min.)	$\phi 20\sim\phi 150$
Edge width (mm)	2.0~6.0
Grooving depth (mm)	2.2~8.1
See Page	G127

Type	GFVS
External dia. of the groove (min.)	$\phi 35\sim\phi 150$
Edge width (mm)	2.5~6.0
Grooving depth (mm)	4.6~8.1
See Page	G129

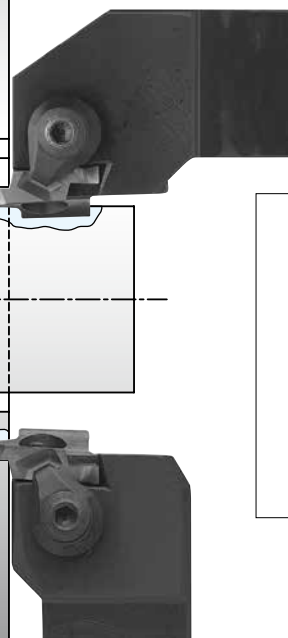

Type	GFVT
External dia. of the groove (min.)	$\phi 35\sim\phi 150$
Edge width (mm)	2.5~6.0
Grooving depth (mm)	4.6~8.1
See Page	G130

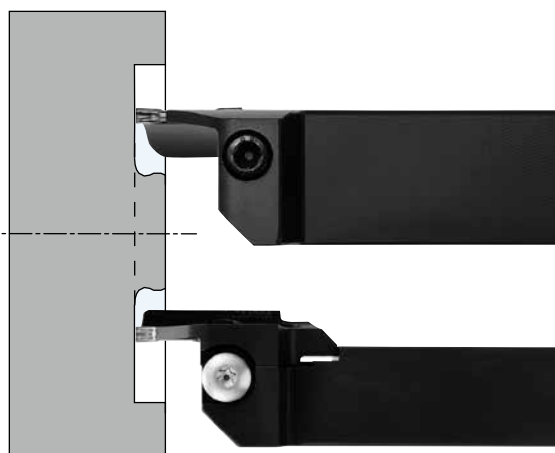
KGDF face grooving $\phi 25\sim$ 

Type	KGDF-Z
External dia. of the groove (min.)	$\phi 50$
Edge width (mm)	3.0~5.0
Grooving depth (mm)	15
See Page	G118

Type	*KGDF
External dia. of the groove (min.)	$\phi 25$
Edge width (mm)	2.0~6.0
Grooving depth (mm)	6~32
See Page	G114~G117

* The separate type toolholders can accept all the blades if their hand is matching.

Grooving and turning
GM



Deep grooving and turning
DM




High feed
GH



Full-R
CM


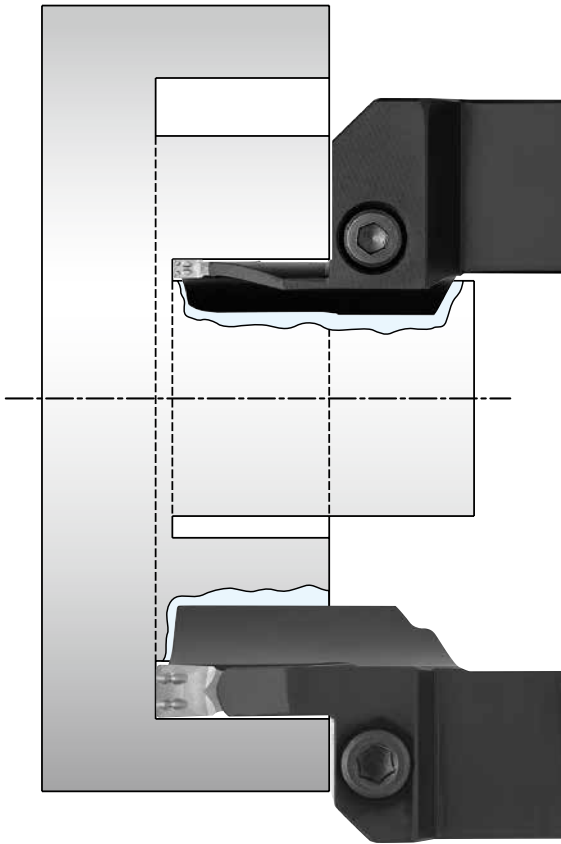


Face grooving & turning $\phi 25\sim$ 


Type	KFMS
External dia. of the groove (min.)	$\phi 25\sim\phi 235$
Edge width (mm)	3.0~6.0
Grooving depth (mm)	13~32
See Page	G135




Type	KFMS-8
External dia. of the groove (min.)	$\phi 54\sim\phi 155$
Edge width (mm)	8.0
Grooving depth (mm)	25
See Page	G138

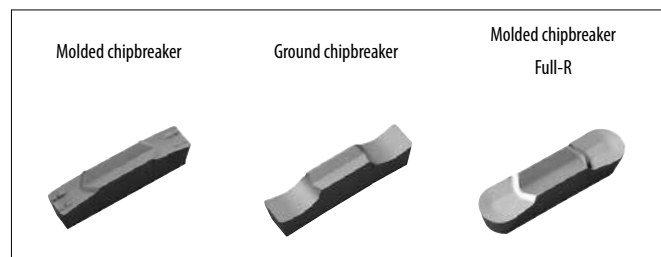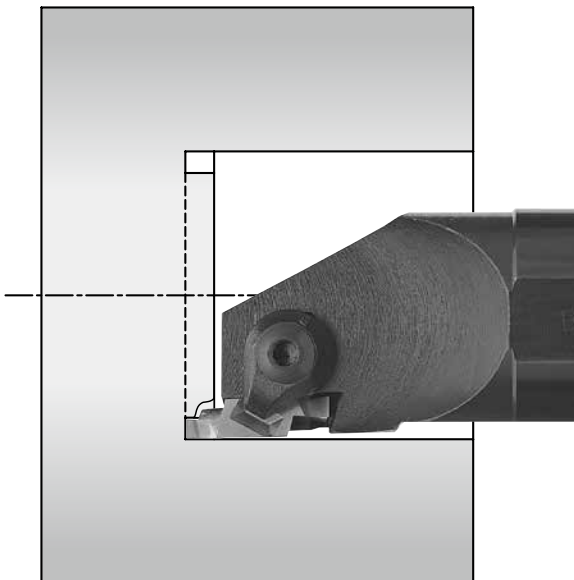Face grooving $\phi 35\sim$ 

Type	GIFV
External dia. of the groove (min.)	$\phi 35\sim\phi 50$
Edge width (mm)	2.0~6.0
Grooving depth (mm)	2.2~8.1
See Page	G133

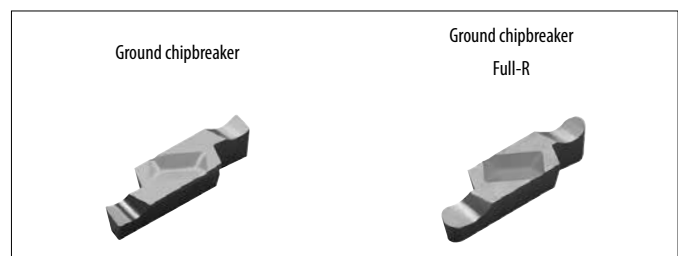

EZFG (Internal grooving / Face grooving)

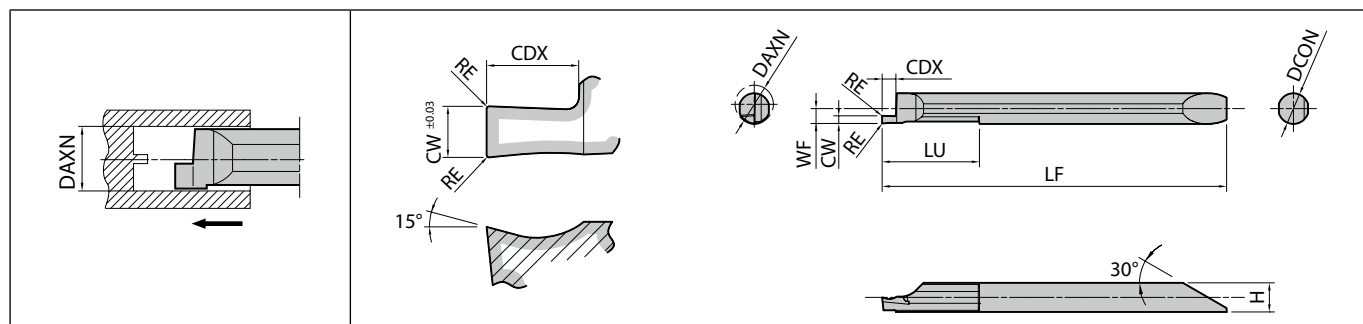

Right-hand shown


Dimensions

Description	No. of edges	External dia.of the groove (mm)	Dimension (mm)								Tolerance (mm)				Carbide			Applicable sleeve 🌀 F38~F43
		DAXN (min.)	CW	CDX	RE	DCON	H	LF	LU	WF	CW min.	CW max.	RE min.	RE max.	PVD		-	
															PR1225		GW05	
															R	L	R	
EZFG%L 050040-100 050040-150	1	5	1 1.5	1.5 2	0.05	4	3.8	45	12	1.9	-0.03	+0.03	-0.013	+0.013	● ●	● ●	● ●	EZH040...
EZFG%L 060050-100 060050-150 060050-200	1	6	1 1.5 2	1.5 2.5 3	0.05	5	4.8	53.2	15	2.4	-0.03	+0.03	-0.013	+0.013	● ● ●	● ● ●	● ● ●	EZH050...
EZFG%L 080070-100 080070-150 080070-200 080070-300	1	8	1 1.5 2 3	2 2.5 3 3	0.05	7	6.8	64.2	25	3.4	-0.03	+0.03	-0.013	+0.013	● ● ● ●	● ● ● ●	● ● ● ●	EZH070...

CDX shows available grooving depth.

Recommended cutting conditions G103

EZ Bars Identification System

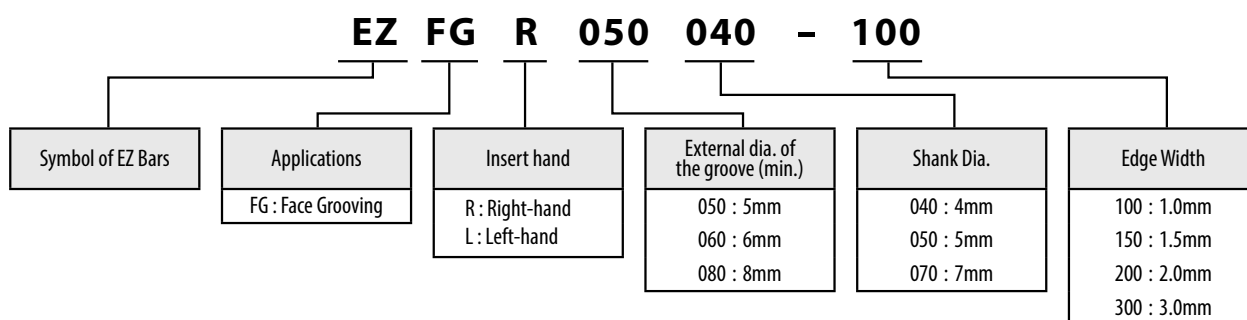

● : Standard item

EZ bars are
sold in 1 piece boxes

Applicable sleeves

Sleeve				Applicable insert for internal face grooving		Applicable machine manufacturer
EZH-CT (Adjustable overhang length with coolant hole) ➡ F39	EZH-HP (Adjustable overhang length) ➡ F41	EZH-ST ➡ F43	Sleeve shank dia.	EZFG	Shank dia.	
			DCON(mm)		DCON(mm)	
-	-	EZH 04012ST-80 05012ST-80 07012ST-80	12	EZFG [®] /L 050040-... EZFG [®] /L 060050-... EZFG [®] /L 080070-...	4 5 7	(General purpose)
-	EZH 04016HP-100 05016HP-100 07016HP-100	EZH 04016ST-100 05016ST-100 07016ST-100	16	EZFG [®] /L 050040-... EZFG [®] /L 060050-... EZFG [®] /L 080070-...	4 5 7	(General purpose)
EZH 04019CT-120 05019CT-120 07019CT-120	EZH 04019HP-120 05019HP-120 07019HP-120	EZH 04019ST-120 05019ST-120 07019ST-120	19.05	EZFG [®] /L 050040-... EZFG [®] /L 060050-... EZFG [®] /L 080070-...	4 5 7	Citizen Machinery
EZH 04020CT-120 05020CT-120 07020CT-120	EZH 04020HP-120 05020HP-120 07020HP-120	EZH 04020ST-120 05020ST-120 07020ST-120	20	EZFG [®] /L 050040-... EZFG [®] /L 060050-... EZFG [®] /L 080070-...	4 5 7	Eguro Tsugami Citizen Machinery (General purpose)
EZH 04022CT-135 05022CT-135 07022CT-135	EZH 04022HP-135 05022HP-135 07022HP-135	EZH 04022ST-135 05022ST-135 07022ST-135	22	EZFG [®] /L 050040-... EZFG [®] /L 060050-... EZFG [®] /L 080070-...	4 5 7	Star Micronics Nomura DS Tsugami
EZH 04025.0CT-135 05025.0CT-135 07025.0CT-135	EZH 04025.0HP-135 05025.0HP-135 07025.0HP-135	EZH 04025.0ST-135 05025.0ST-135 07025.0ST-135	25	EZFG [®] /L 050040-... EZFG [®] /L 060050-... EZFG [®] /L 080070-...	4 5 7	Eguro Tsugami Citizen Machinery (General purpose)
EZH 04025.4CT-120 05025.4CT-120 07025.4CT-120	EZH 04025.4HP-120 05025.4HP-120 07025.4HP-120	EZH 04025.4ST-120 05025.4ST-120 07025.4ST-120	25.4	EZFG [®] /L 050040-... EZFG [®] /L 060050-... EZFG [®] /L 080070-...	4 5 7	Citizen Machinery

· Choose sleeves (DCB) to meet with DCON dimension of Face Grooving Inserts.

· Adjustment Pin cannot be installed to **EZH-ST** sleeves. To adjust overhang of the bar, please use **EZH-CT** / **HP** sleeves.


· Machine manufacturers in random order

Recommended cutting conditions

Workpiece material	Insert grades		EZFG®.050040-100 EZFG®.060050-100 EZFG®.080070-100	EZFG®.050040-150 EZFG®.060050-150 EZFG®.080070-150	EZFG®.060050-200 EZFG®.080070-200	EZFG®.080070-300	Remarks
	MEGACOAT	Carbide					
	PR1225	GW05					
Carbon steel / Alloy steel	★ 30~100	-	~0.02	~0.03	~0.04	~0.05	Coolant
Stainless steel	★ 30~80	-	~0.01	~0.02	~0.02	~0.03	
Non-ferrous metals	-	★ ~300	~0.03	~0.05	~0.06	~0.08	

★ : 1st recommendation

VNFG (Internal grooving / Face grooving)

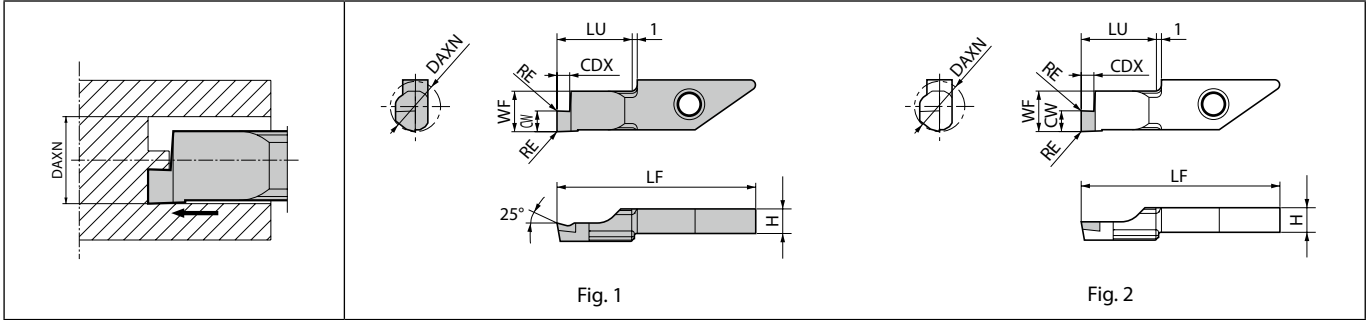

Right-hand shown

Dimensions

Description	No. of edges	External dia.of the groove (mm)		Dimension (mm)							Tolerance (mm)		Fig.	Carbide			PCD	Applicable toolholder ⚙️ F48~F51
		DAXN (min.)	DAXX (max.)	CW	CDX	RE	H	LF	LU	WF	CW min.	CW max.		PVD	-	-		
														PR1225	PR930	KW10	KPD001	
VNFR 0810-10 0820-10 0830-10	1	8 (0)	∞ (∞)	1	2	0.05	3.9	29.6	10	7.3	-0.03	+0.03	1	●	●	●		SVNR...-12N S...-SVNR12N S...-SVNR12SN
VNFR 0820-10NB 0830-10NB	1			2	3									2	3	0.05		

CDX shows available grooving depth.
External dia. of the groove DAXN (0) means that you can make the initial groove within DAXN ~ DAXX and then widen it to the center.

Recommended cutting conditions G105

Grooving

- External
- Internal
- Face

System tip-bars are sold in 5 piece boxes

CBN & PCD Inserts are sold in 1 piece boxes

● : Standard item MT0 : Made to order


Recommended cutting conditions

Workpiece material	Recommended insert grades (Vc: m/min)			VNFG0810	VNFG0820	VNFG0830	Remarks
	MEGACOAT	PVD Coated Carbide	Carbide				
	PR1225	PR930	KW10				
	f (mm/rev)						
Carbon steel / Alloy steel	★ 30~100	☆ 30~100		~0.02	~0.04	~0.05	Coolant
Stainless steel	★ 30~100	☆ 30~80		~0.01	~0.02	~0.03	
Non-ferrous metals			★ ~300	~0.04	~0.06	~0.08	

★:1st recommendation ☆:2nd recommendation



TWFG (Face grooving, Horizontal type)

		Carbon steel / Alloy steel								●	●	P		
		Stainless steel								○	●	M		
		Cast iron										K		
		Non-ferrous metals									●	N		
		Titanium alloy										S		
		Hard materials (~ 40HRC)										H		
		Hard materials (40HRC ~)												
Insert	Description	No. of edges	External dia. of the groove (mm)		Dimension (mm)			Tolerance (mm)		Angle (°)	Carbide			Applicable toolholder ➡ G106 G107
			DAXN (min.)	DAXX (max.)	CW	CDX	RE	CW min.	CW max.	RA	PVD	-		
											PR1025 PR1335	KW10		
	TWFGL	2	6 (0)	∞ (∞)	0.5	1	0.05	- 0.03	+ 0.03	1.5	●	●	●	STWL.....-15 S...-STWL15
	080				0.8	1.5				1.5	●	●	●	
	100				1	2.2				2	●	●	●	
	125				1.25	2.2				2	●	●	●	
	150				1.5	2.2				2	●	●	●	
	180				1.8	3				2	●	●	●	
	200				2	3				2	●	●	●	

CDX shows available grooving depth.


External dia. of the groove DAXN (0) means that you can make the initial groove within DAXN ~ DAXX and then widen it to the center.

Left-hand shown

Recommended cutting conditions ➔ G109

G

Grooving

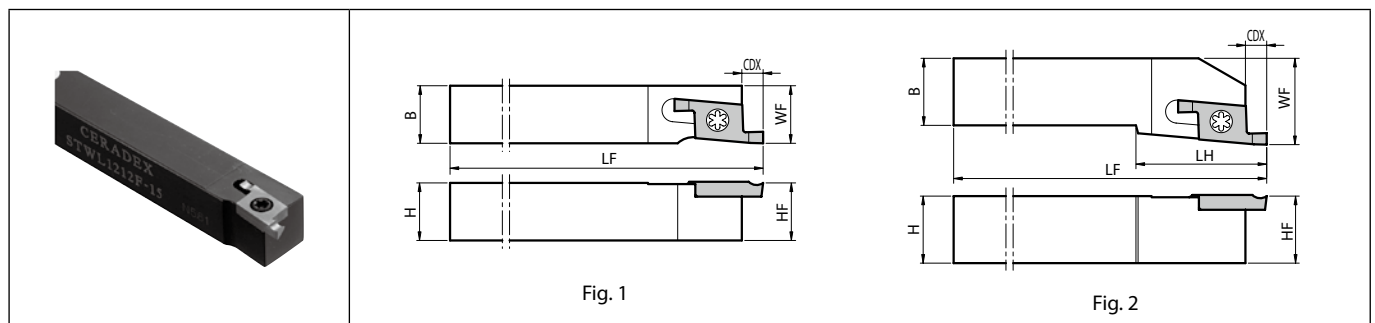STW (Face grooving, Square shank for horizontal type insert)

Left-hand shown | Left-hand Insert for Left-hand Toolholder. | (For right-hand toolholder for boring, See page F56.)


Toolholder dimensions

Description		Availability	Dimension (mm)								Fig.	Spare parts		Applicable inserts  G106
												Screw	Wrench	
			L	CDX	H	B	LH	HF	LF	WF				
STWL	1010F-15		3.7	10	10	-	10	85	1	SB-3080TR	LTW-10S	TWFG...		
	1212F-15			12	12		12	12						
	1212K-15			16	16		16	125						
	1616K-15			16	16		16	16						
STWL	2020K-15		3.7	20	20	25	20	125	2	SB-3080TR	LTW-10S	TWFG...		
	2525M-15			25	25		25	150					32	

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

● : Standard item

G106Twin-bars are
sold in 5 piece boxes

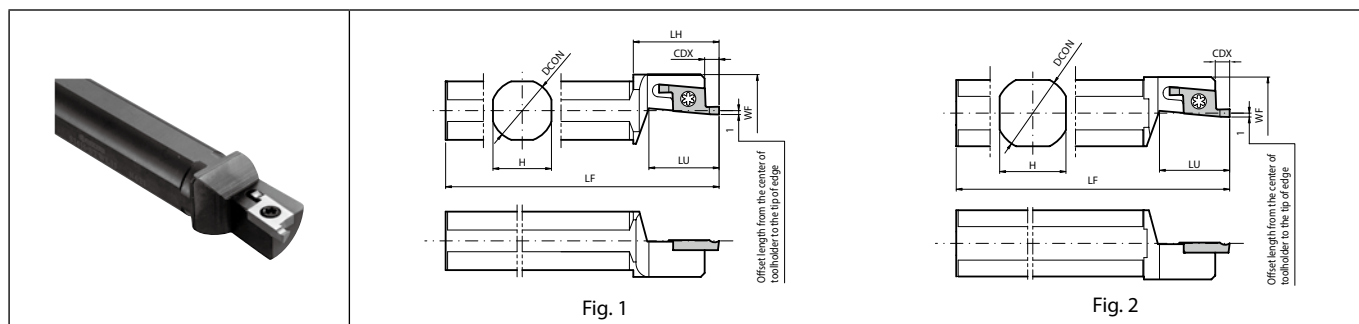S-STW (Face grooving, Round shank for horizontal type insert)



Left-hand shown | Left-hand Insert for Left-hand Toolholder. | (For right-hand toolholder for boring, See page F57.)

Toolholder dimensions

Description	Availability	Dimension (mm)							Coolant hole	Fig.	Spare parts		Applicable inserts ➡ G106		
		L	DCON	CDX	H	LH	LF	LU			WF	Screw		Wrench	
															
S12F- STWL15	●	12	3.7	11	22	80	18	20	No	1	SB-3080TR	LTW-10S	TWFGL...		
S14H- STWL15	●	14		13		100									
S15F- STWL15	●	15.875		15		85									
S16F- STWL15	●	16	3.7	17	-	90	18	18.5	No	2	SB-3080TR	LTW-10S	TWFGL...		
S19G- STWL15	●	19.05				120								22	24.5
S19K- STWL15	●	19.05				90									
S20G- STWL15	●	20				18	120	22						24.5	
S20K- STWL15	●	20				18	120								
S22K- STWL15	●	22				20	125	22						24.5	
S25.0J- STWL15	●	25				23	110								25
S25K- STWL15	●	25.4	23	120	25										

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.

TWFGT (Face grooving, Vertical type)

		Carbon steel / Alloy steel										○	●			P
		Stainless steel										○	●			M
		Cast iron														K
		Non-ferrous metals												●		N
		Titanium alloy														S
		Hard materials (~ 40HRC)														H
		Hard materials (40HRC ~)														
Insert	Description	No. of edges	External dia. of the groove (mm)		Dimension (mm)			Tolerance (mm)		Angle (°)	Carbide			Applicable toolholder ➡ G109		
			DAXN (min.)	DAXX (max.)	CW	CDX	RE	CW min.	CW max.	RA ⁹ /L	PVD	-				
											PR1025	PR1335	KW10			
		TWFGTR	050	2	6 (0)	∞ (∞)	0.5	1	0.05	- 0.03	+ 0.03	1.5	●	●	●	STWSR.....-1ST
		080	0.8				1.5	1.5				●	●	●		
		100	1				2.2	2				●	●	●		
		125	1.25				2.2	2				●	●	●		
		150	1.5				2.2	2				●	●	●		
		180	1.8				3	2				●	●	●		
		200	2				3	2				●	●	●		

CDX shows available grooving depth.
External dia. of the groove DAXN (0) means that you can make the initial groove within DAXN ~ DAXX and then widen it to the center.
Right-hand shown

Recommended cutting conditions ➡ G109


Grooving

- External
- Internal
- Face

● : Standard item

G108

Twin-bars are sold in 5 piece boxes

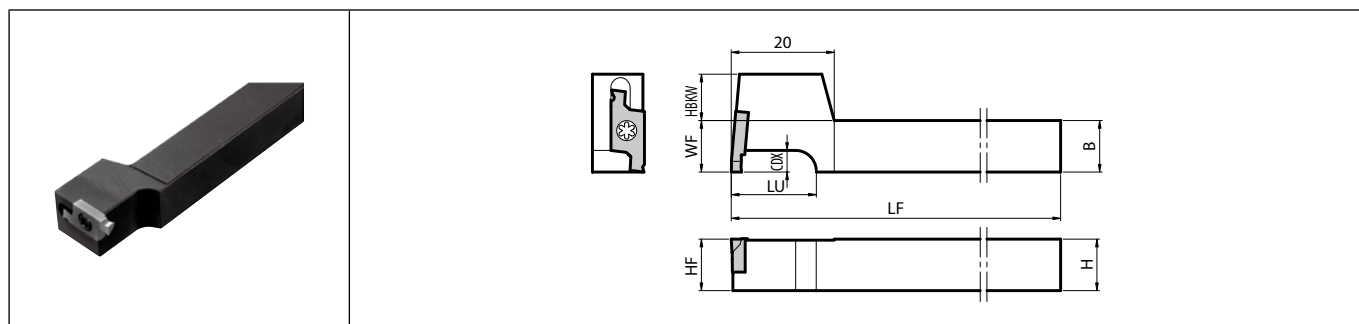STWS (Face grooving, Square shank for vertical type , L-shape)

Right-hand shown

Toolholder dimensions

Description	Availability	Dimension (mm)									Spare parts		Applicable inserts G108
											Screw	Wrench	
		R	H	B	LU	HF	HBKW	LF	CDX	WF			
STWSR 1010F-15T	●	10	10	16	10	9	85	4.2	12	10	SB-3080TR	LTW-10S	TWFGTR...
1010JX-15T	●						120						
1212F-15T	●	12	12		12	7	85						
1212JX-15T	●						120						
1616JX-15T	●	16	16	20	16	3				16			

CDX shows the distance from the toolholder to the cutting edge. Available Groove Depth : „CDX“ of Insert.


Recommended cutting conditions TWFG / TWFGT

Workpiece material	Recommended insert grades (Vc:m/min)			TWFGLO50 TWFGLO80 TWFGL100 TWFGTR050 TWFGTR080 TWFGTR100	TWFG125 TWFG150 TWFGTR125 TWFGTR150	TWFG180 TWFG200 TWFGTR180 TWFGTR200	Remarks
	MEGACOAT	PVD coated carbide	Carbide				
	PR1535	PR1025	KW10	f (mm/rev)			
Carbon steel / Alloy steel	★ 30~100	☆ 30~100	-	~0.02	~0.03	~0.04	Coolant
Stainless steel	★ 30~80	☆ 30~80	-	~0.01	~0.02	~0.02	
Non-ferrous metals	-	-	★ ~300	~0.03	~0.04	~0.06	

★ :1st recommendation ☆ :2nd recommendation

KGDF: Face grooving


Separate type toolholder (toolholder + blade) and Integral type toolholder are available.
Adaptable to a wide range of face grooving applications by changing blades

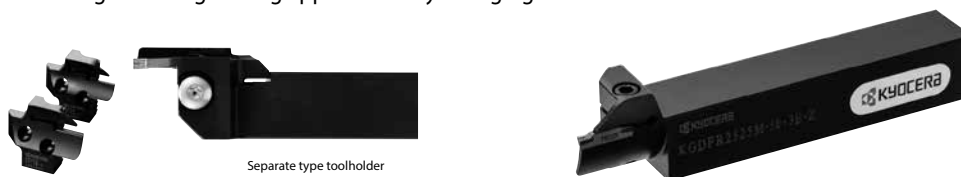

Insert clamping system "W grip"

Unique "W Grip" (insert anti-slip structure) provides stable machining quality


1. Prevents abnormal machining surface and / or insert breakage resulting from slip of insert.
2. Improves repetitive installation accuracy of insert (GDFM and GDFMS inserts are not applicable to KGD external grooving, cut-off and KGD internal grooving toolholders.)

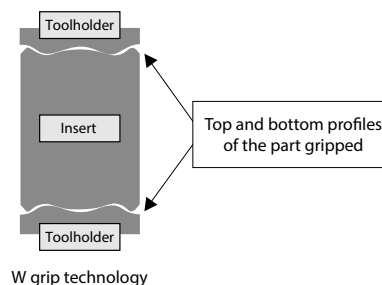

Smooth chip control


For general purpose GM chipbreaker, for high feed grooving GH chipbreaker, for deep grooving DM chipbreaker and for non-ferrous metals GS chipbreaker

Advantages of chipbreaker

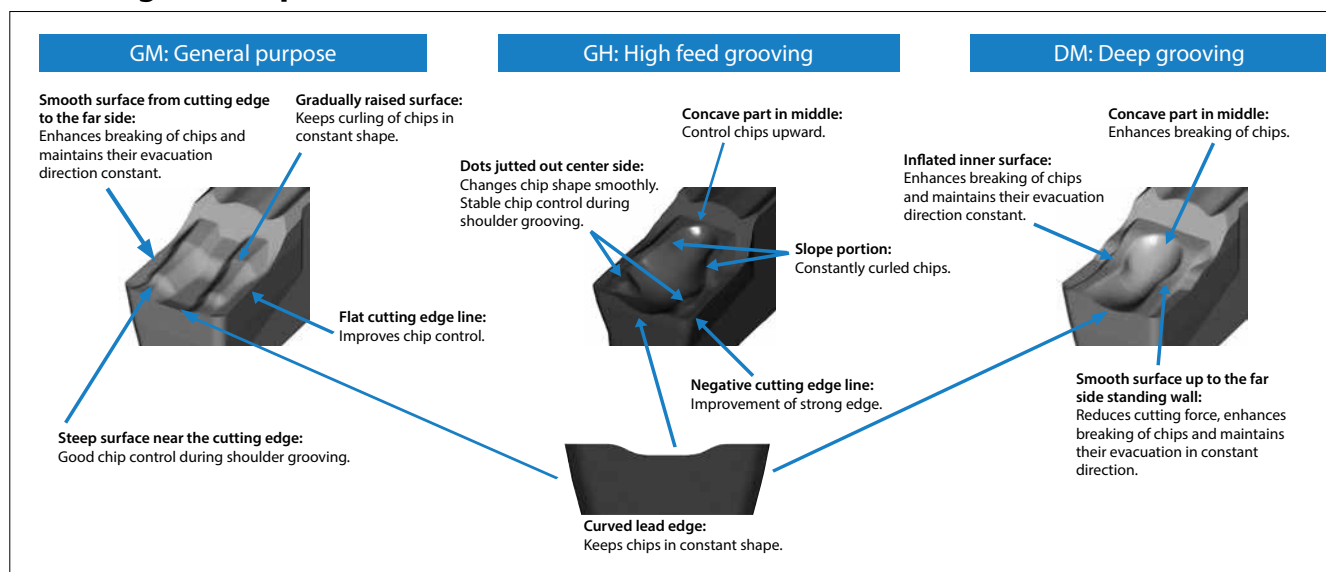


Chip control of GM chipbreaker


Face grooving ($\phi 62$)

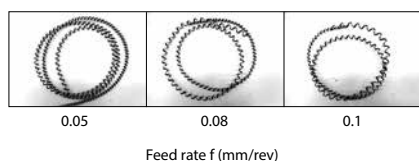

Side grooving

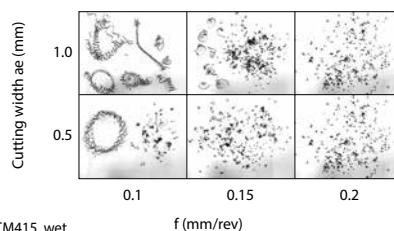

Turning



Cutting conditions: $V_c = 150$ m/min, $f = 0.05 \sim 0.2$ mm/rev, GDFM5020N-040GM, SCM415, wet

GDFM/GDMFS

		Carbon steel / Alloy steel								       				P
		Stainless steel								       				M
		Cast iron								       				K
		Non-ferrous metals								       				N
		Titanium alloy								       				S
		Hard materials (~ 40HRC)								       				H
		Hard materials (40HRC ~)								       				
Insert		Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide		Cermet		Applicable toolholder  G114 ~ G120
				CW	S	RE	INSL	CW min.	CW max.	PVD	-	-		
										PR1215 GW15	PR1225 TN620	TN90		
 General purpose	GDFM 2020N-020GM	2	2	3.9	0.2	21	-0.03	+0.03	 				KGDF [®] /L...-2...	
	GDFM 3020N-030GM	2	3	4.3	0.3	20	-0.03	+0.03	 				KGDF [®] /L...-3...	
	GDFM 4020N-040GM	2	4	4.5	0.4	20	-0.03	+0.03	 				KGDF [®] /L...-4...	
	GDFM 5020N-040GM 5020N-080GM	2	5	4.5	0.4 0.8	20	-0.04	+0.04	 				KGDF [®] /L...-5...	
	GDFM 6020N-040GM 6020N-080GM	2	6	4.5	0.4 0.8	20	-0.04	+0.04	 				KGDF [®] /L...-6...	
 High feed	GDFM 4020N-040GH	2	4	4.5	0.4	20	-0.03	+0.03	 				KGDF [®] /L...-4...	
	GDFM 5020N-040GH 5020N-080GH	2	5	4.5	0.4 0.8	20	-0.04	+0.04	 				KGDF [®] /L...-5...	
	GDFM 6020N-040GH 6020N-080GH	2	6	4.5	0.4 0.8	20	-0.04	+0.04	 				KGDF [®] /L...-6...	
 Deep grooving	GDFM 3020N-030DM	2	3	4.3	0.3	20	-0.03	+0.03	 				KGDF [®] /L...-3...	
	GDFM 4020N-040DM	2	4	4.5	0.4	20	-0.03	+0.03	 				KGDF [®] /L...-4...	
	GDFM 5020N-040DM	2	5	4.5	0.4	20	-0.04	+0.04	 				KGDF [®] /L...-5...	
	GDFM 6020N-040DM	2	6	4.5	0.4	20	-0.04	+0.04	 				KGDF [®] /L...-6...	
 Deep grooving / 1-edge	GDFMS 3020N-030DM	1	3	4.3	0.3	20	-0.03	+0.03	 				KGDF [®] /L...-3...	
	GDFMS 4020N-040DM	1	4	4.5	0.4	20	-0.03	+0.03	 				KGDF [®] /L...-4...	
	GDFMS 5020N-040DM	1	5	4.5	0.4	20	-0.04	+0.04	 				KGDF [®] /L...-5...	
	GDFMS 6020N-040DM	1	6	4.5	0.4	20	-0.04	+0.04	 				KGDF [®] /L...-6...	
 Non-ferrous metals	GDFG 3020N-020GS	2	3	4.3	0.2	20	-0.2	+0.2	 				KGDF [®] /L...-3...	
	GDFG 4020N-040GS	2	4	4.5	0.4	20	-0.2	+0.2	 				KGDF [®] /L...-4...	
	GDFG 5020N-040GS	2	5	4.5	0.4	20	-0.2	+0.2	 				KGDF [®] /L...-5...	
	GDFG 6020N-040GS	2	6	4.5	0.4	20	-0.2	+0.2	 				KGDF [®] /L...-6...	
 Full R	GDFM 3020N-150R-CM	2	3	4.3	1.5	20	-0.03	+0.03	 				KGDF [®] /L...-3...	
	GDFM 4020N-200R-CM	2	4	4.5	2	21	-0.03	+0.03	 				KGDF [®] /L...-4...	
	GDFM 5020N-250R-CM	2	5	4.5	2.5	21	-0.04	+0.04	 				KGDF [®] /L...-5...	
	GDFM 6020N-300R-CM	2	6	4.5	3	22	-0.04	+0.04	 				KGDF [®] /L...-6...	

GDFM40/50/60-CM differs from other descriptions in length (INSL) to avoid interference of a toolholder with workpiece.

Recommended cutting conditions ➡ G122

Inserts identification system

G D F	M	S	30	20	N	-	030	DM
Series	Tolerance symbol M : M Class	No. of edge No indication: 2-edge S: 1-edge	Edge width 20 : 2mm 30 : 3mm :	Insert length 20 : 20mm	Hand of tool N : Neutral		Corner-R(RE) 020 : 0.2mm 030 : 0.3mm 040 : 0.4mm 150R : 1.5mm (Full-R)	Chipbreaker symbol GM : Grooving and turning DM : Deep grooving GH : High feed grooving CM : Full-R GS : Non-ferrous metals

● : Standard item



KGDF: Toolholder assembly identification


Left-hand

Blade (Blade Description is printed.)
Left-hand : KGDFL...-C

Left-hand shown
Right-hand : KGDFR...-C

Right-hand shown





Toolholder (Toolholder Description is printed.)
Right-hand : KGDR...-C

Right-hand shown
Left-hand : KGDL...-C

Left-hand shown

Right-hand



- Right-hand blade for left-hand toolholder, left-hand blade for right-hand toolholder.
- Please purchase the toolholder and blade separately..
- The insert clamping screw (BH6X10TR), blade fixing screw (SB-60120TR) and wrench (LTW-25) which are included in the toolholder can be used.

	Clamp Bolt (for Insert Clamp)	Clamp Screw (for Blade)	Wrench
External			
Internal			
Face			
	BH6X10TR	SB-60120TR	LTW-25

External dia. of the groove DAXN / DAXX

External dia. of the groove within DAXN ~ DAXX are the available range for the initial grooving on the unprocessed workpiece (Ref. to Fig. 1). Then, you can widen it up to the center towards the inside (excluding the models listed in the right table) and towards the outside according to machine limits.





Fig. 1

Limit of Turning toward Center


Turning towards the Center causes the toolholder to interfere with the groove wall depending on the initial cut's diameter.

 ød DMIN₂ Interference Remaining Boss Dia. ød	DMIN ₂		25	26	27	28 and over
	Description		ød (mm)			
	KGDF ^{9/L} -25-3A-C + KGD ^{1/h} 2020-C		4	2	0	0 (No remaining Boss)
	KGDF ^{9/L} -25-3A-C + KGD ^{1/h} 2525-C					
	KGDF ^{9/L} -25-4A-C + KGD ^{1/h} 2020-C		6	3	0	
	KGDF ^{9/L} -25-4A-C + KGD ^{1/h} 2525-C					
	KGDF ^{9/L} -25-5B-C + KGD ^{1/h} 2020-C		7	4	1	
	KGDF ^{9/L} -25-5B-C + KGD ^{1/h} 2525-C					
	KGDF ^{9/L} -25-6B-C + KGD ^{1/h} 2020-C		9	4	1	
	KGDF ^{9/L} -25-6B-C + KGD ^{1/h} 2525-C					

e.g.)

Toolholder assembled from KGDFR-25-3A-C and KGDL2020-C with ø25 as first cut towards the center, it will cause a rubbing with the toolholder cartridge if ød is 4.0mm.

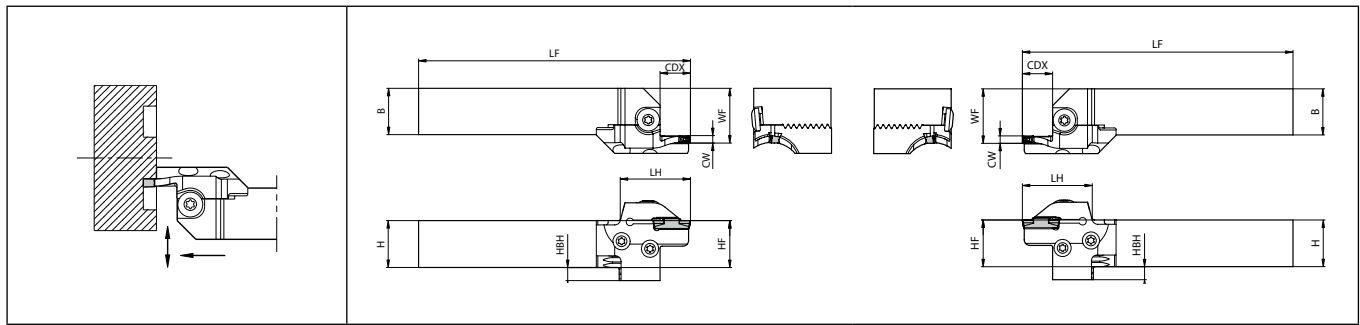

KGDF (Face grooving / 0° separate type)

Right-hand shown
(Right-hand blade and left-hand toolholder)

Left-hand shown
(Left-hand blade and right-hand toolholder)

Toolholder dimensions (Blade and toolholder)

Shank angle	Cutting width CW (mm)	Shank size (mm)	Max. depth of cut CDX(mm)	External dia. of the groove (mm)		Blade description ⚙️ G121	Toolholder description ⚙️ G42	Dimension (mm)																
				DAXN (min.)	DAXX (max.)			H	B	LH	HF	HBH	LF	WF										
0°	2	20	6	25	30	KGDFR	-25-2A-C	KGDL2020-C	20	20	33	20	12	115	24.5									
				30	35		-30-2A-C																	
				35	45		-35-2A-C																	
				45	60		-45-2A-C																	
				60	80		-60-2A-C																	
				80	100		-80-2A-C																	
				100	130		-100-2A-C																	
			13	25	30	KGDFR	-25-2B-C				KGDL2020-C		20	20		36	20	12	118	24.5				
				30	35		-30-2B-C																	
				35	45		-35-2B-C																	
				45	60		-45-2B-C																	
				60	80		-60-2B-C																	
				80	100		-80-2B-C																	
				100	130		-100-2B-C																	
			15	25	30	KGDFR	-25-2A-C				KGDL2525-C		25	25		33	25	7	140	29.5				
				30	35		-30-2A-C																	
				35	45		-35-2A-C																	
				45	60		-45-2A-C																	
		60		80	-60-2A-C																			
		80		100	-80-2A-C																			
		100		130	-100-2A-C																			
		13		25	30		KGDFR	-25-2B-C	KGDL2525-C	25		25			36						25	7	143	29.5
				30	35			-30-2B-C																
				35	45			-35-2B-C																
			45	60	-45-2B-C																			
			60	80	-60-2B-C																			
			80	100	-80-2B-C																			
			100	130	-100-2B-C																			
		15	25	30	KGDFR	-25-2A-C	KGDL3232-C	32	32	33	32	-	160	36.5										
			30	35		-30-2A-C																		
			35	45		-35-2A-C																		
			45	60		-45-2A-C																		
			60	80		-60-2A-C																		
			80	100		-80-2A-C																		
			100	130		-100-2A-C																		
			13	25		30									KGDFR	-25-2B-C	KGDL3232-C	32	32	36	32	-	163	36.5
				30		35										-30-2B-C								
				35		45										-35-2B-C								
		45		60	-45-2B-C																			
		60		80	-60-2B-C																			
		80		100	-80-2B-C																			
		100		130	-100-2B-C																			

1. KGDF: Right-hand blade for left-hand toolholder, left-hand blade for right-hand toolholder.

The toolholder is applicable for all blade with suitable hand.

2. CDX: Maximum depth to which processing can be made. (If the CDX is 20 mm or more, the maximum groove-depth of groove made by the 2-edge insert will be 18 mm.)

Above toolholders are applicable to Cut-off, too.

3. The insert clamping Screw (BH6X10TR), blade fixing Screw (SB-60120TR) and Wrench (LTW-25) which are included in the toolholder can be used.

Applicable inserts ➡ **G111**

Toolholder dimensions (Blade and toolholder)

Shank angle	Cutting width CW (mm)	Shank size (mm)	Max. depth of cut CDX (mm)	External dia. of the groove (mm)		Blade description ⚙️ G121	Toolholder description ⚙️ G42	Dimension (mm)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
				DAXN (min.)	DAXX (max.)			H	B	LH	HF	HBH	LF	WF																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
0°	3	□20	13	25 30	KGDF%	-25-3A-C	KGD ¹ /r2020-C	20	20	36	20	12	118	24.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
				30 40		-30-3A-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				40 50		-40-3A-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			15	50 65	KGDF%	-50-3B-C				38		25	120																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				65 85		-65-3B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				85 110		-85-3B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			22	110 145	KGDF%	-110-3B-C				45		127																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				50 65		-50-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				65 85		-65-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			25	85 110	KGDF%	-85-3C-C				48		130																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				110 145		-110-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
		□25	13	25 30	KGDF%	-25-3A-C	KGD ¹ /r2525-C	25	25	36	25	7	143	29.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
				30 40		-30-3A-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				40 50		-40-3A-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			15	50 65	KGDF%	-50-3B-C				38		25	145																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				65 85		-65-3B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				85 110		-85-3B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			22	110 145	KGDF%	-110-3B-C				45		152																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				50 65		-50-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				65 85		-65-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			25	85 110	KGDF%	-85-3C-C				48		155																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				110 145		-110-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
		□32	13	25 30	KGDF%	-25-3A-C	KGD ¹ /r3232-C	32	32	36	32	-	163	36.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
				30 40		-30-3A-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				40 50		-40-3A-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			15	50 65	KGDF%	-50-3B-C				38		32	165																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				65 85		-65-3B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				85 110		-85-3B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			22	110 145	KGDF%	-110-3B-C				45		172																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				50 65		-50-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				65 85		-65-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			25	85 110	KGDF%	-85-3C-C				48		175																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				110 145		-110-3C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
0°	4	□20	13	25 35	KGDF%	-25-4A-C	KGD ¹ /r2020-C	20	20	36	20	12	118	24.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
				35 50		-35-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				50 70		-50-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				70 100		-70-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				100 150		-100-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				150 220		-150-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			15	220 ∞	KGDF%	-220-4B-C				38		25	130																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				35 50		-35-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				50 70		-50-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				70 100		-70-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				100 150		-100-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				150 220		-150-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			25	220 ∞	KGDF%	-220-4C-C				48		25	155																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				35 50		-35-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				50 70		-50-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				70 100		-70-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				100 150		-100-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				150 220		-150-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			□25	13	25 35	KGDF%				-25-4A-C		KGD ¹ /r2525-C	25		25	36	25	7	143	29.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
					35 50					-35-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
					50 70					-50-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
					70 100					-70-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
					100 150					-100-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
					150 220					-150-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
		15		220 ∞	KGDF%	-220-4B-C	38	25	145																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
				35 50		-35-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				50 70		-50-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				70 100		-70-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				100 150		-100-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				150 220		-150-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
		□32	13	25 35	KGDF%	-25-4A-C	KGD ¹ /r3232-C	32	32	36	32	-	163	36.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
				35 50		-35-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				50 70		-50-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				70 100		-70-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				100 150		-100-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				150 220		-150-4B-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			15	220 ∞	KGDF%	-220-4B-C				38		32	165																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				35 50		-35-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				50 70		-50-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				70 100		-70-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				100 150		-100-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				150 220		-150-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
		25	220 ∞	KGDF%	-220-4C-C	48	32	175																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
			35 50		-35-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
			50 70		-50-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
			70 100		-70-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
			100 150		-100-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
			150 220		-150-4C-C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													

1. KGDF: Right-hand blade for left-hand toolholder, left-hand blade for right-hand toolholder.

The toolholder is applicable for all blade with suitable hand.

2. CDX: Maximum depth to which processing can be made. (If the CDX is 20 mm or more, the maximum groove-depth of groove made by the 2-edge insert will be 18 mm.)

Above toolholders are applicable to Cut-off, too.

3. The insert clamping Screw (BH6X10TR), blade fixing Screw (SB-60120TR) and Wrench (LTW-25) which are included in the toolholder can be used.

Applicable inserts ➡ G111



Grooving

Toolholder dimensions (Blade and toolholder)

Shank angle	Cutting width CW (mm)	Shank size (mm)	Max. depth of cut CDX (mm)	External dia. of the groove (mm)		Blade description ➡ G121	Toolholder description ➡ G42	Dimension (mm)									
				DAXN (min.)	DAXX (max.)			H	B	LH	HF	HBH	LF	WF			
0°	5	□20	15	25	35	KGDF ^{R/L} -25-5B-C	KGD ^{L/R} 2020-C	20	20	38		120	24.5				
				35	50	-35-5B-C											
				50	75	-50-5B-C											
				75	115	-75-5B-C											
				115	180	-115-5B-C											
				180	235	-180-5B-C											
			235	∞	-235-5B-C												
			20	25	35	KGDF ^{R/L} -25-5C-C				43	20	12					
				35	50	-35-5C-C											
				50	75	-50-5C-C											
				75	115	-75-5C-C											
				115	180	-115-5C-C											
		180		235	-180-5C-C												
		25	235	∞	-235-5C-C	48				20	12						
			75	115	KGDF ^{R/L} -75-5D-C									130			
			115	180	-115-5D-C												
			180	235	-180-5D-C												
			235	∞	-235-5D-C												
			32	75	115		KGDF ^{R/L} -75-5D-C	55	137								
		115		180	-115-5D-C												
		180		235	-180-5D-C												
		235		∞	-235-5D-C												
		□25		15	25	35	KGDF ^{R/L} -25-5B-C				KGD ^{L/R} 2525-C	25	25	38		145	29.5
					35	50	-35-5B-C										
			50		75	-50-5B-C											
			75		115	-75-5B-C											
			115		180	-115-5B-C											
			180		235	-180-5B-C											
			235	∞	-235-5B-C												
			20	25	35	KGDF ^{R/L} -25-5C-C	43	25	7								
				35	50	-35-5C-C											
				50	75	-50-5C-C											
				75	115	-75-5C-C											
				115	180	-115-5C-C											
		180		235	-180-5C-C												
		25	235	∞	-235-5C-C	48	25	7									
			75	115	KGDF ^{R/L} -75-5D-C					155							
			115	180	-115-5D-C												
			180	235	-180-5D-C												
			235	∞	-235-5D-C												
			32	75	115						KGDF ^{R/L} -75-5D-C	55	162				
		115		180	-115-5D-C												
		180		235	-180-5D-C												
		235		∞	-235-5D-C												
		□32		15	25	35	KGDF ^{R/L} -25-5B-C	KGD ^{L/R} 3232-C	32	32	38					165	36.5
					35	50	-35-5B-C										
			50		75	-50-5B-C											
			75		115	-75-5B-C											
115	180		-115-5B-C														
180	235		-180-5B-C														
235	∞		-235-5B-C														
20	25		35	KGDF ^{R/L} -25-5C-C	43	32	-										
	35		50	-35-5C-C													
	50		75	-50-5C-C													
	75		115	-75-5C-C													
	115		180	-115-5C-C													
	180	235	-180-5C-C														
25	235	∞	-235-5C-C	48	32	-											
	75	115	KGDF ^{R/L} -75-5D-C								175						
	115	180	-115-5D-C														
	180	235	-180-5D-C														
	235	∞	-235-5D-C														
	32	75	115					KGDF ^{R/L} -75-5D-C	55	182							
115		180	-115-5D-C														
180		235	-180-5D-C														
235		∞	-235-5D-C														

1. KGDF: Right-hand blade for left-hand toolholder, left-hand blade for right-hand toolholder.

Applicable inserts ➡ G111

The toolholder is applicable for all blade with suitable hand.

2. CDX: Maximum depth to which processing can be made. (If the CDX is 20 mm or more, the maximum groove-depth of groove made by the 2-edge insert will be 18 mm.)

Above toolholders are applicable to Cut-off, too.

Toolholder dimensions (Blade and toolholder)

Shank angle	Cutting width CW (mm)	Shank size (mm)	Max. depth of cut CDX(mm)	External dia. of the groove (mm)		Blade description ➡ G121	Toolholder description ➡ G42	Dimension (mm)								
				DAXN (min.)	DAXX (max.)			H	B	LH	HF	HBH	LF	WF		
0°	6	□20	15	25	35	KGDF ^{R/L} -25-6B-C	KGD ^{L/R} 2020-C	20	20	38			120	24.5		
				35	50	-35-6B-C										
				50	75	-50-6B-C										
				75	115	-75-6B-C										
				115	180	-115-6B-C										
				180	235	-180-6B-C										
				235	∞	-235-6B-C										
			20	25	35	KGDF ^{R/L} -25-6C-C				43	20	12	125			
				25	35	50									-35-6C-C	
					50	75									-50-6C-C	
					75	115									-75-6C-C	
					115	180									-115-6C-C	
					180	235									-180-6C-C	
					235	∞									-235-6C-C	
			32	75	115	KGDF ^{R/L} -75-6D-C				55			137			
				115	180	-115-6D-C										
				180	235	-180-6D-C										
				235	∞	-235-6D-C										
		□25	15	25	35	KGDF ^{R/L} -25-6B-C	KGD ^{L/R} 2525-C	25	25	38			145	29.5		
				35	50	-35-6B-C										
				50	75	-50-6B-C										
				75	115	-75-6B-C										
				115	180	-115-6B-C										
				180	235	-180-6B-C										
				235	∞	-235-6B-C										
			20	25	35	KGDF ^{R/L} -25-6C-C				43	25	7	150			
				25	35	50									-35-6C-C	
					50	75									-50-6C-C	
					75	115									-75-6C-C	
					115	180									-115-6C-C	
					180	235									-180-6C-C	
					235	∞									-235-6C-C	
			32	75	115	KGDF ^{R/L} -75-6D-C				55			162			
				115	180	-115-6D-C										
				180	235	-180-6D-C										
				235	∞	-235-6D-C										
		□32	15	25	35	KGDF ^{R/L} -25-6B-C	KGD ^{L/R} 3232-C	32	32	38			165	36.5		
				35	50	-35-6B-C										
				50	75	-50-6B-C										
				75	115	-75-6B-C										
				115	180	-115-6B-C										
				180	235	-180-6B-C										
				235	∞	-235-6B-C										
			20	25	35	KGDF ^{R/L} -25-6C-C				43	32	-	170			
				25	35	50									-35-6C-C	
					50	75									-50-6C-C	
					75	115									-75-6C-C	
					115	180									-115-6C-C	
					180	235									-180-6C-C	
					235	∞									-235-6C-C	
			32	75	115	KGDF ^{R/L} -75-6D-C				55			182			
				115	180	-115-6D-C										
				180	235	-180-6D-C										
				235	∞	-235-6D-C										

1. KGDF: Right-hand blade for left-hand toolholder, left-hand blade for right-hand toolholder.

Applicable inserts ➡ G111

The toolholder is applicable for all blade with suitable hand.


2. CDX: Maximum depth to which processing can be made. (If the CDX is 20 mm or more, the maximum groove-depth of groove made by the 2-edge insert will be 18 mm.)

Above toolholders are applicable to Cut-off, too.



Grooving

KGDF-Z (Face grooving)

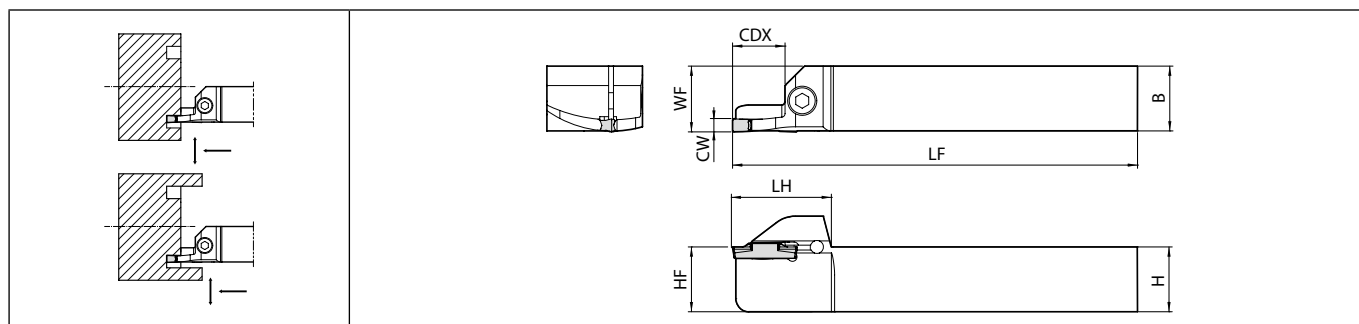


Right-hand shown

Toolholder dimensions


Description	Availability		External dia. of the groove (mm)		Dimension (mm)								Spare parts		Applicable inserts  G111
													Clamp bolt	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	CW	CDX	H	B	LH	HF	LF	WF			
KGDF [®] /L 2020K50-3B-Z 2020K65-3B-Z 2020K85-3B-Z 2020K110-3B-Z 2525M50-3B-Z 2525M65-3B-Z 2525M85-3B-Z 2525M110-3B-Z			50	65	3	15	20	20	30.5	20	125	20.3		LW-4	GDFM 3020... GDFMS 3020... GDFG 3020...
			65	85											
			85	110											
			110	145											
			50	65			25	25	25	150	25.3				
			65	85											
			85	110											
			110	145											
KGDF [®] /L 2020K50-4B-Z 2020K70-4B-Z 2020K100-4B-Z 2525M50-4B-Z 2525M70-4B-Z 2525M100-4B-Z			50	70	4	15	20	20	30.5	20	125	20.3		LW-4	GDFM 4020... GDFMS 4020... GDFG 4020...
			70	100											
			100	150											
			50	70			25	25	25	150	25.3				
			70	100											
			100	150											
KGDF [®] /L 2020K50-5B-Z 2020K75-5B-Z 2020K115-5B-Z 2525M50-5B-Z 2525M75-5B-Z 2525M115-5B-Z			50	75	5	15	20	20	30.5	20	125	20.3		LW-4	GDFM 5020... GDFMS 5020... GDFG 5020...
			75	115											
			115	180											
			50	75			25	25	25	150	25.3				
			75	115											
			115	180											

KGDF-Z toolholder identification system

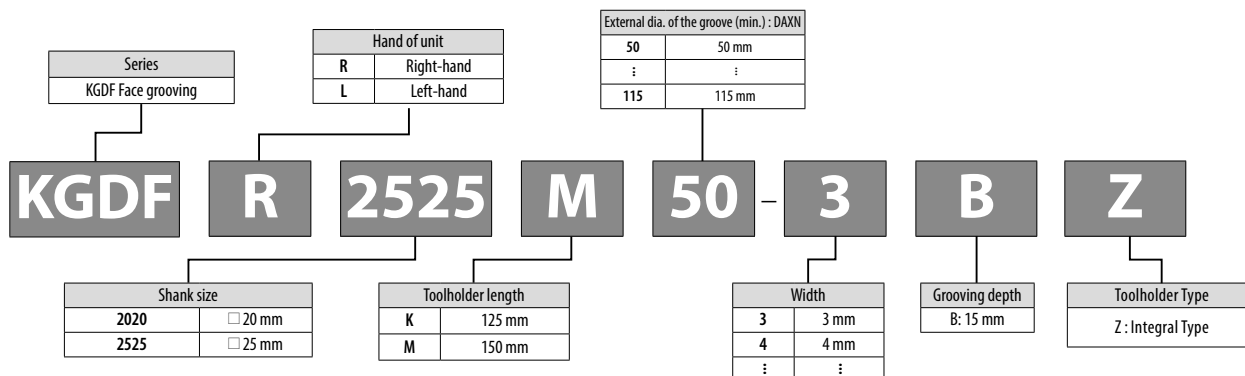

● : Standard item

G118

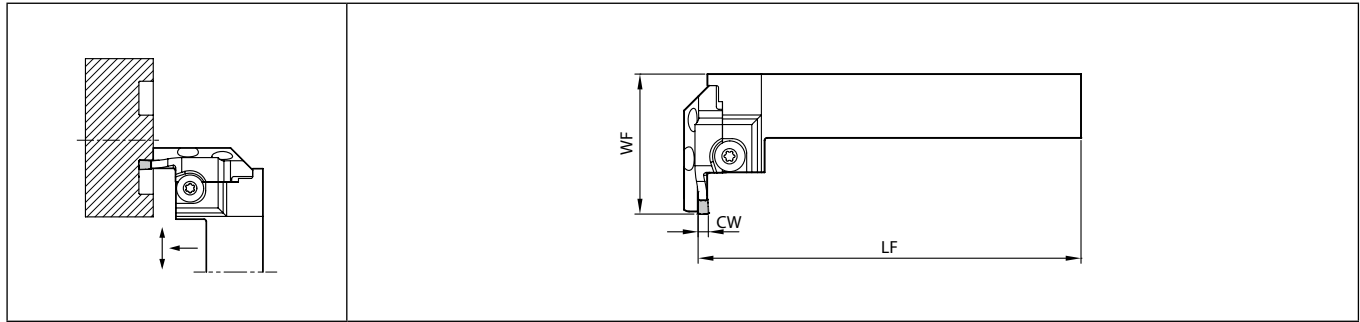
KGDF (Face grooving / 90° separate type)

Right-hand shown (Right-hand blade and right-hand toolholder)

Toolholder dimensions (Blade and toolholder)

Shank angle	Cutting width CW (mm)	Shank size (mm)	Max. depth of cut CDX (mm)	External dia. of the groove (mm)		Blade description ➡ G121	Toolholder description ➡ G42	Dimension (mm)						
				DAXN (min.)	DAXX (max.)			LF	WF					
90°	2	20	6	25	30	KGDFR	-25-2A-C	KGDSR2020-C	125	49.7				
				30	35		-30-2A-C							
				35	45		-35-2A-C							
				45	60		-45-2A-C							
				60	80		-60-2A-C							
				80	100		-80-2A-C							
				100	130		-100-2A-C							
			13	25	30	KGDFR	-25-2B-C		125	52.7				
				30	35		-30-2B-C							
				35	45		-35-2B-C							
				45	60		-45-2B-C							
				60	80		-60-2B-C							
				80	100		-80-2B-C							
		15	100	130		-100-2B-C	150		54.7					
			25	30	KGDFR	-25-2A-C								
			30	35		-30-2A-C								
			35	45		-35-2A-C								
			45	60		-45-2A-C								
			60	80		-60-2A-C								
			80	100		-80-2A-C								
		25	100	130		-100-2A-C	KGDSR2525-C		150	52.7				
			25	30	KGDFR	-25-2B-C								
			30	35		-30-2B-C								
			35	45		-35-2B-C								
			45	60		-45-2B-C								
			60	80		-60-2B-C								
			80	100		-80-2B-C								
			100	130		-100-2B-C								
90°	3		20	13	25	30		KGDF%			-25-3A-C	KGDS% 2020-C	125	52.7
					30	40					-30-3A-C			
					40	50					-40-3A-C			
					50	65		KGDF%			-50-3B-C			
					65	85					-65-3B-C			
					85	110					-85-3B-C			
				15	110	145					-110-3B-C		125	54.7
		50			65	KGDF%	-50-3C-C							
		65			85		-65-3C-C							
		85			110		-85-3C-C							
		110			145		-110-3C-C							
		25			30	KGDF%	-25-3A-C	150	52.7					
		13		30	40		-30-3A-C							
				40	50		-40-3A-C							
				50	65	KGDF%	-50-3B-C							
				65	85		-65-3B-C							
				85	110		-85-3B-C							
		25	110	145		-110-3B-C	KGDS% 2525-C	150	54.7					
			50	65	KGDF%	-50-3C-C								
			65	85		-65-3C-C								
			85	110		-85-3C-C								
			110	145		-110-3C-C								
			25	30	KGDF%	-25-3A-C								
			22	30	40					-30-3A-C				
				40	50					-40-3A-C				
				50	65	KGDF%				-50-3B-C				
				65	85					-65-3B-C				
				85	110					-85-3B-C				
				110	145					-110-3B-C				
		25	50	65	KGDF%	-50-3C-C								
			65	85		-65-3C-C								
			85	110		-85-3C-C								
			110	145		-110-3C-C								

Applicable inserts ➡ G111

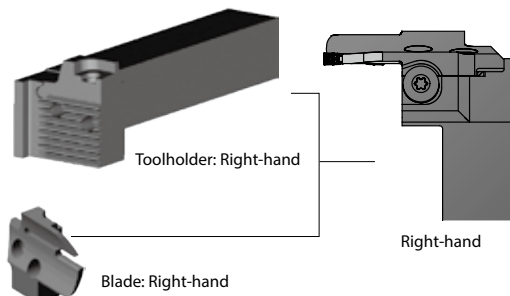

- KGDF 90° type is not available as unit (Toolholder + blade). Please purchase toolholder and blade separately.
- Right-hand Blade for Right-hand Toolholder, Left-hand Blade for Left-hand Toolholder.
- The insert clamping Screw (BH6X10TR), blade fixing Screw (SB-60120TR) and Wrench (LTW-25) which are included in the toolholder can be used.



Toolholder dimensions (Blade and toolholder)

Shank angle	Cutting width CW (mm)	Shank size (mm)	Max. depth of cut CDX (mm)	External dia. of the groove (mm)		Blade description Ⓢ G121	Toolholder description Ⓢ G42	Dimension (mm)							
				DAXN (min.)	DAXX (max.)			LF	WF						
90°	5	□20	15	25	35	KGDF%/-25-5B-C	KGDS%/.2020-C	125	54.7						
				35	50					-35-5B-C					
				50	75					-50-5B-C					
				75	115					-75-5B-C					
				115	180					-115-5B-C					
				180	235					-180-5B-C					
				235	∞					-235-5B-C					
			20	25	35	KGDF%/-25-5C-C			KGDS%/.2020-C	59.7					
				35	50						-35-5C-C				
				50	75						-50-5C-C				
				75	115						-75-5C-C				
				115	180						-115-5C-C				
				180	235						-180-5C-C				
				235	∞						-235-5C-C				
		25	75	115	KGDF%/-75-5D-C	KGDS%/.2020-C			64.7						
			115	180						-115-5D-C					
			180	235						-180-5D-C					
			235	∞						-235-5D-C					
			32	75						115	KGDF%/-75-5D-C	KGDS%/.2020-C	71.7		
				115						180				-115-5D-C	
				180						235				-180-5D-C	
		235		∞	-235-5D-C										
		□25		15	25	35			KGDF%/-25-5B-C	KGDS%/.2525-C				54.7	
					35	50									-35-5B-C
					50	75									-50-5B-C
			75		115	-75-5B-C									
115	180		-115-5B-C												
180	235		-180-5B-C												
235	∞		-235-5B-C												
20	25		35	KGDF%/-25-5C-C	KGDS%/.2525-C	59.7									
	35		50				-35-5C-C								
	50		75				-50-5C-C								
	75		115				-75-5C-C								
	115		180				-115-5C-C								
	180		235				-180-5C-C								
	235		∞				-235-5C-C								
25	75	115	KGDF%/-75-5D-C	KGDS%/.2525-C		64.7									
	115	180					-115-5D-C								
	180	235					-180-5D-C								
	235	∞					-235-5D-C								
	32	75					115	KGDF%/-75-5D-C	KGDS%/.2525-C	71.7					
		115					180				-115-5D-C				
		180					235				-180-5D-C				
235		∞	-235-5D-C												

Shank angle	Cutting width CW (mm)	Shank size (mm)	Max. depth of cut CDX (mm)	External dia. of the groove (mm)		Blade description Ⓢ G121	Toolholder description Ⓢ G42	Dimension (mm)						
				DAXN (min.)	DAXX (max.)			LF	WF					
90°	6	□20	15	25	35	KGDF®/L	-25-6B-C	KGDS®/L.2020-C	125	54.7				
				35	50		-35-6B-C							
				50	75		-50-6B-C							
				75	115		-75-6B-C							
				115	180		-115-6B-C							
				180	235		-180-6B-C							
				235	∞		-235-6B-C							
			20	25	35	KGDF®/L	-25-6C-C		125	59.7				
				35	50		-35-6C-C							
				50	75		-50-6C-C							
				75	115		-75-6C-C							
				115	180		-115-6C-C							
				180	235		-180-6C-C							
				235	∞		-235-6C-C							
		25	75	115	KGDF®/L	-75-6D-C	125	64.7						
			115	180		-115-6D-C								
			180	235		-180-6D-C								
			235	∞		-235-6D-C								
			32	75		115			KGDF®/L	-75-6D-C	125	71.7		
				115		180				-115-6D-C				
				180		235				-180-6D-C				
		235		∞	-235-6D-C									
		□25		15	25	35	KGDF®/L	-25-6B-C		KGDS®/L.2525-C			150	54.7
					35	50		-35-6B-C						
					50	75		-50-6B-C						
			75		115	-75-6B-C								
115	180		-115-6B-C											
180	235		-180-6B-C											
235	∞		-235-6B-C											
20	25		35	KGDF®/L	-25-6C-C	150	59.7							
	35		50		-35-6C-C									
	50		75		-50-6C-C									
	75	115	-75-6C-C											
	115	180	-115-6C-C											
	180	235	-180-6C-C											
	235	∞	-235-6C-C											
25	75	115	KGDF®/L	-75-6D-C	150	64.7								
	115	180		-115-6D-C										
	180	235		-180-6D-C										
	235	∞		-235-6D-C										
	32	75		115			KGDF®/L	-75-6D-C	150	71.7				
		115		180				-115-6D-C						
		180		235				-180-6D-C						
235		∞	-235-6D-C											



· KGDF 90° type is not available as unit (Toolholder + blade). Please purchase toolholder and blade separately.

· Right-hand Blade for Right-hand Toolholder, Left-hand Blade for Left-hand Toolholder.


· The insert clamping Screw (BH6X10TR), blade fixing Screw (SB-60120TR) and Wrench (LTW-25) which are included in the toolholder can be used.

Applicable inserts ➡ G111

Face grooving blade identification system

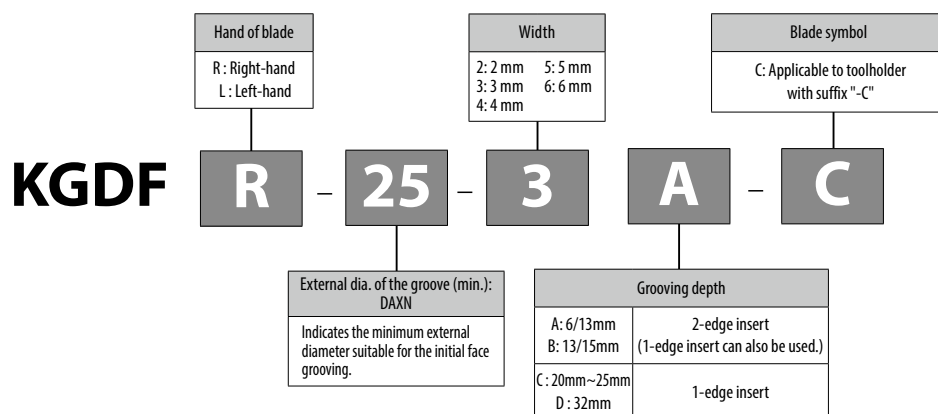

Blade dimensions


















Shape	Blade description	Availability		External dia. of the groove (mm)		Dimension (mm)			Cutting width CW (mm)	Applicable inserts ➡ G111	Applicable toolholder ➡ G42	
		R	L	DAXN (min.)	DAXX (max.)	L	T	A				
 Right-hand shown	KGDFR -25-2A-C	●		25	30	44.35	6	1.5	2	GDFM 2020N-020GM	KGD [°] /R.....-C KGDS [°] /L.....-C	
	KGDFR -30-2A-C	●		30	35							
	KGDFR -35-2A-C	●		35	45							
	KGDFR -45-2A-C	●		45	60							
	KGDFR -60-2A-C	●		60	80							
	KGDFR -80-2A-C	●		80	100							
	KGDFR -100-2A-C	●		100	130							
	KGDFR -25-2B-C	●		25	30	47.35	13	2	GDFM 3020... GDFMS 3020... GDFG 3020...			
	KGDFR -30-2B-C	●		30	35							
	KGDFR -35-2B-C	●		35	45							
	KGDFR -45-2B-C	●		45	60							
	KGDFR -60-2B-C	●		60	80							
	KGDFR -80-2B-C	●		80	100							
	KGDFR -100-2B-C	●		100	130							
	KGDF [°] /L -25-3A-C	●	●	25	30	47.35	13	2		3		GDFM 4020... GDFMS 4020... GDFG 4020...
	KGDF [°] /L -30-3A-C	●	●	30	40							
	KGDF [°] /L -40-3A-C	●	●	40	50							
	KGDF [°] /L -50-3B-C	●	●	50	65							
	KGDF [°] /L -65-3B-C	●	●	65	85							
	KGDF [°] /L -85-3B-C	●	●	85	110							
	KGDF [°] /L -110-3B-C	●	●	110	145							
	KGDF [°] /L -50-3C-C	●	●	50	65	56.35	22	3	4	GDFM 5020... GDFMS 5020... GDFG 5020...		
	KGDF [°] /L -65-3C-C	●	●	65	85							
	KGDF [°] /L -85-3C-C	●	●	85	110							
	KGDF [°] /L -110-3C-C	●	●	110	145							
	KGDF [°] /L -25-4A-C	●	●	25	35							
	KGDF [°] /L -35-4B-C	●	●	35	50	47.35	15	3	4			GDFM 6020... GDFMS 6020... GDFG 6020...
	KGDF [°] /L -50-4B-C	●	●	50	70							
	KGDF [°] /L -70-4B-C	●	●	70	100							
	KGDF [°] /L -100-4B-C	●	●	100	150							
	KGDF [°] /L -150-4B-C	●	●	150	220							
	KGDF [°] /L -220-4B-C	●	●	220	∞							
	KGDF [°] /L -35-4C-C	●	●	35	50	49.35	25	4	5	GDFM 6020... GDFMS 6020... GDFG 6020...		
	KGDF [°] /L -50-4C-C	●	●	50	70							
	KGDF [°] /L -70-4C-C	●	●	70	100							
	KGDF [°] /L -100-4C-C	●	●	100	150							
	KGDF [°] /L -150-4C-C	●	●	150	220							
	KGDF [°] /L -220-4C-C	●	●	220	∞							
	KGDF [°] /L -25-5B-C	●	●	25	35	49.35	15	4	5			GDFM 6020... GDFMS 6020... GDFG 6020...
	KGDF [°] /L -35-5B-C	●	●	35	50							
	KGDF [°] /L -50-5B-C	●	●	50	75							
	KGDF [°] /L -75-5B-C	●	●	75	115							
	KGDF [°] /L -115-5B-C	●	●	115	180							
	KGDF [°] /L -180-5B-C	●	●	180	235							
	KGDF [°] /L -235-5B-C	●	●	235	∞							
	KGDF [°] /L -25-5C-C	●	●	25	35	54.35	20	5	6	GDFM 6020... GDFMS 6020... GDFG 6020...		
	KGDF [°] /L -35-5C-C	●	●	35	50							
	KGDF [°] /L -50-5C-C	●	●	50	75							
	KGDF [°] /L -75-5C-C	●	●	75	115							
	KGDF [°] /L -115-5C-C	●	●	115	180							
	KGDF [°] /L -180-5C-C	●	●	180	235							
	KGDF [°] /L -235-5C-C	●	●	235	∞							
	KGDF [°] /L -75-5D-C	●	●	75	115	66.35	32	5	6			GDFM 6020... GDFMS 6020... GDFG 6020...
	KGDF [°] /L -115-5D-C	●	●	115	180							
	KGDF [°] /L -180-5D-C	●	●	180	235							
	KGDF [°] /L -235-5D-C	●	●	235	∞							
	KGDF [°] /L -25-6B-C	●	●	25	35							
	KGDF [°] /L -35-6B-C	●	●	35	50	49.35	15	5	6	GDFM 6020... GDFMS 6020... GDFG 6020...		
	KGDF [°] /L -50-6B-C	●	●	50	75							
	KGDF [°] /L -75-6B-C	●	●	75	115							
	KGDF [°] /L -115-6B-C	●	●	115	180							
	KGDF [°] /L -180-6B-C	●	●	180	235							
	KGDF [°] /L -235-6B-C	●	●	235	∞							
	KGDF [°] /L -25-6C-C	●	●	25	35	54.35	20	5	6			GDFM 6020... GDFMS 6020... GDFG 6020...
	KGDF [°] /L -35-6C-C	●	●	35	50							
	KGDF [°] /L -50-6C-C	●	●	50	75							
	KGDF [°] /L -75-6C-C	●	●	75	115							
	KGDF [°] /L -115-6C-C	●	●	115	180							
	KGDF [°] /L -180-6C-C	●	●	180	235	59.35	25	5	6	GDFM 6020... GDFMS 6020... GDFG 6020...		
	KGDF [°] /L -235-6C-C	●	●	235	∞							
	KGDF [°] /L -75-6D-C	●	●	75	115							
	KGDF [°] /L -115-6D-C	●	●	115	180							
	KGDF [°] /L -180-6D-C	●	●	180	235							
	KGDF [°] /L -235-6D-C	●	●	235	∞							
KGDF [°] /L -75-6D-C	●	●	75	115	66.35	32	5	6	GDFM 6020... GDFMS 6020... GDFG 6020...			
KGDF [°] /L -115-6D-C	●	●	115	180								
KGDF [°] /L -180-6D-C	●	●	180	235								
KGDF [°] /L -235-6D-C	●	●	235	∞								
KGDF [°] /L -75-6D-C	●	●	75	115								

● : Standard item

Recommended cutting conditions

Workpiece material	Recommended insert grades (Vc: m/min)					Remarks
	Cermet		MEGACOAT		Carbide	
	TN620	TN90	PR1225	PR1215	GW15	
Carbon steel	☆ 60~200	☆ 80~200	★ 60~160	☆ 80~160	-	Coolant
Alloy steel	☆ 60~160	☆ 70~160	★ 60~150	☆ 60~150	-	
Stainless steel	-	-	★ 50~120	☆ 50~120	-	
Cast iron	-	-	-	★ 80~160	-	
Aluminum alloys	-	-	-	-	★ 160~400	
Brass	-	-	-	-	★ 80~160	

★ : 1st recommendation ☆ : 2nd recommendation

	Grooving	Shoulder grooving (side grooving)	Turning
Chipbreaker	 In the graph below indicates the most recommended value of feed (f)	 In the graph below indicates the most recommended value of feed (f)	
GM (Grooving, turning)			
GH (Grooving, turning, high feed grooving)			
DM (Deep grooving, turning)			
CM (Copying)			
GS (Non-ferrous metals)			- When turning: keep ap less than or equal to the corner-R(RE).

When shoulder grooving

Workpiece material: S50C, A5052(GS)

- If ap is set smaller, set feed higher.
- If ap is set larger, set feed lower.

1. The above values are based on the condition that the CDX of toolholder is 15 mm or less.
2. If the toolholder's CDX is over 15 mm, set the values for turning to 90% or less of those above.

Guide for face grooving

1. Toolholder selection

Check the range of applicable "external diameter of the groove" as well as the groove width and depth.


2. Cutting conditions (Feed rate: f)

When machining on steel, set the feed rate (f) so that chips are created in a helical form in cut-off.

3. How to widen the groove (plunge milling and turning)

Start machining from the outside and then proceed to the inside.

Chip control will be better in this way.



Plunge milling (Grooving + side grooving)	Turning

4. Guide for turning

A. When the cutting amount (a_p) is over 0.5 mm

1. Perform plunge milling.
2. Return the cutting by 0.1 mm. Failure to pull the tool back before traverse machining will result in an unbalanced load applied on only one side of the cutting edge.
3. Perform turning (Ref. to Fig. 1)


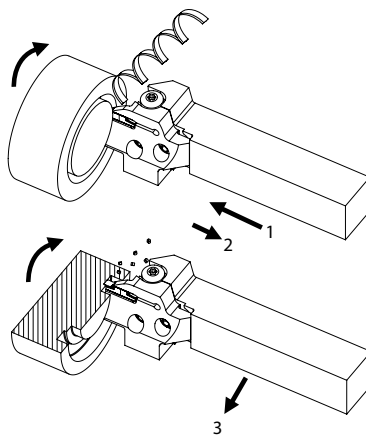


Fig. 1

When widening the face groove width (Ref. to Fig. 2).

Apply the "step turning".
Then perform finishing.




Fig. 2

B. When the cutting amount (a_p) is under 0.5 mm

1. Perform Plunge milling.
2. Perform turning.

Machining without interruption is possible.
(Ref. to Fig. 3)


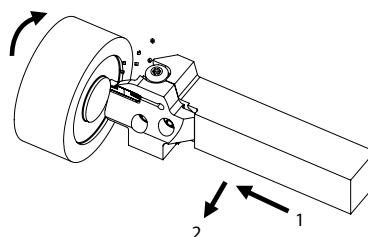




Fig. 3

GVF-AA

		Carbon steel / Alloy steel		●	○		P									
		Stainless steel		●	○		M									
		Cast iron				●	K									
		Non-ferrous metals				●	N									
		Titanium alloy				●	S									
		Hard materials (~ 40HRC)					H									
		Hard materials (40HRC ~)														
Insert		Description		No. of edges	Dimension (mm)						Tolerance (mm)		Carbide			Applicable toolholder ➡ G125
					CW	CDX	S	RE	INSL	W1	CW min.	CW max.	PVD			
													PR1225	PR930	KW10	
		GVFR 100-005AA 200-005AA 300-005AA		2	1	2.2	4.5	0.05	12	4.3	- 0.02	+ 0.02	●	●	●	GVFSL.....08AA GVFTL.....08AA
		2	●		●								●			
		3	●		●								●			
		GVFL 100-005AA 200-005AA 300-005AA		2	1	2.2	4.5	0.05	12	4.3	- 0.02	+ 0.02	●	●	●	GVFSR.....08AA GVFTR.....08AA
					2								●	●	●	
					3								●	●	●	

CDX shows available grooving depth.

GVF^{PR}/L...005AA inserts are not compatible with GVF^{PR}/L...-○○○A (See Page G126) inserts because their Side Relief Angle is 10°.

External dia. of the groove of GFVS-AA (apply to GFVT-AA)

Description	External dia. of the groove (mm)	Applicable inserts	
		DAXN (min.)	DAXX (max.)
GFVS ^{PR} /L 2020K-08AA 2525M-08AA	8 (0)	8 (0)	∞ (∞)
			GVF ^{PR} /L...-...AA

● It is available to infinity ∞ in case of machining the first groove bigger than DAXN.



● When machining towards the outer diameter then there is no MAX. limit to the further groove machining.

● When machining the initial groove on the face at DAXN ø8

If the initial groove is made smaller than this, the toolholder interferes with the workpiece.

● When widening the groove width to inner diameter.

For machining up to the center of the workpiece regardless of insert width.

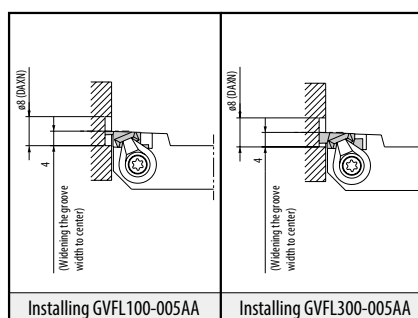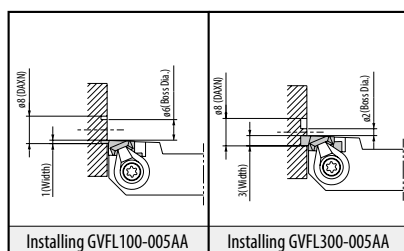


Recommended cutting conditions GFVS-AA / GFVT-AA

Workpiece material	Recommended insert grades (Vc: m/min)			Grooving	Turning*		Remarks
	MEGACOAT	PVD coated carbide	Carbide		f (mm/rev)	ap (mm)	
	PR1225	PR930	KW10	f (mm/rev)		ap (mm)	
Carbon steel / Alloy steel	★ 50~100	☆ 50~100		0.01~0.05	Max. 0.5	0.01~0.05	Coolant
Stainless steel	★ 50~80	☆ 50~80		0.01~0.03	Max. 0.3	0.01~0.02	
Non-ferrous metals			★ ~200	0.01~0.08	Max. 0.5	0.01~0.08	

* ap has to be set for less than corner-R(RE) when turning of edge width 1.0 mm (GVF^{PR}/L 100-005AA).

★ :1st recommendation ☆ :2nd recommendation

● : Standard item

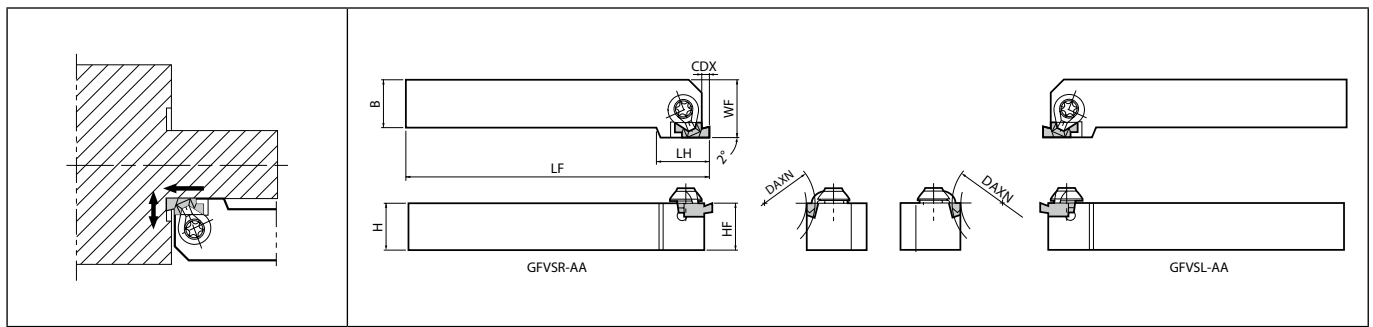GFVS-AA (Face grooving)

Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.


Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)							Spare parts		Applicable inserts ➡ G124
												Clamp set	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	LF	WF			
GFVS%L 2020K-08AA 2525M-08AA	●	●	8 (0)	∞ (∞)	2.2	20 25	20 25	18	20 25	125 150	25 32	CPS-5V	FT-15	GVF-/R...-...AA

CDX shows available grooving depth.

The value () of External dia. of the groove (DAXX) is the maximum outer diameter value after the initial groove between DAXN ~ DAXX. (It is possible to widen the groove to infinity ∞).

The value () of External dia. of the groove (DAXN) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between DAXN ~ DAXX.

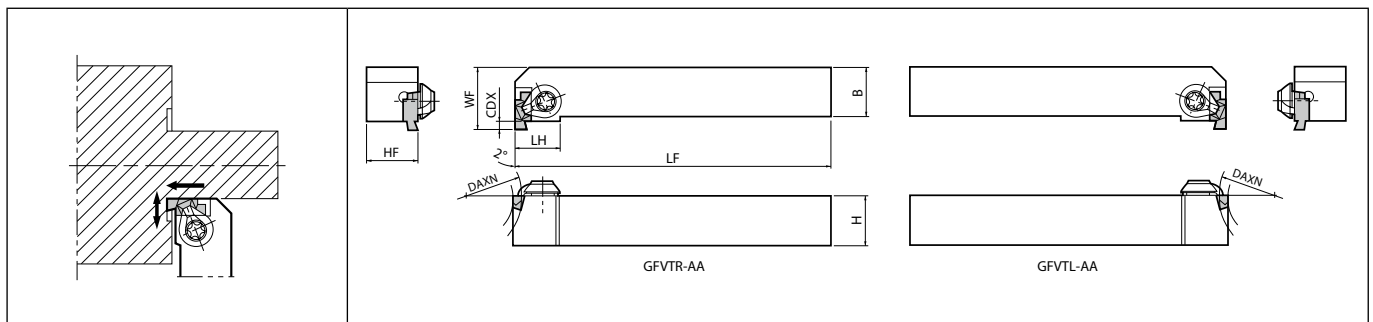GFVT-AA (Face grooving)

Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)							Spare parts		Applicable inserts ➡ G124
												Clamp set	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	LF	WF			
GFVT%L 2020K-08AA 2525M-08AA	●	●	8 (0)	∞ (∞)	2.2	20 25	20 25	14	20 25	125 150	25 32	CPS-5V	FT-15	GVF-/R...-...AA

CDX shows available grooving depth.

The value () of External dia. of the groove (DAXX) is the maximum outer diameter value after the initial groove between DAXN ~ DAXX. (It is possible to widen the groove to infinity ∞).

The value () of External dia. of the groove (DAXN) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between DAXN ~ DAXX.

● : Standard item



G




Grooving

External

Internal

Face


[illegible]

● : Standard item MT0 : Made to order

Recommended cutting conditions ➡ G146

CBN & PCD Inserts are sold in 1 piece boxes

GVF (Face grooving)

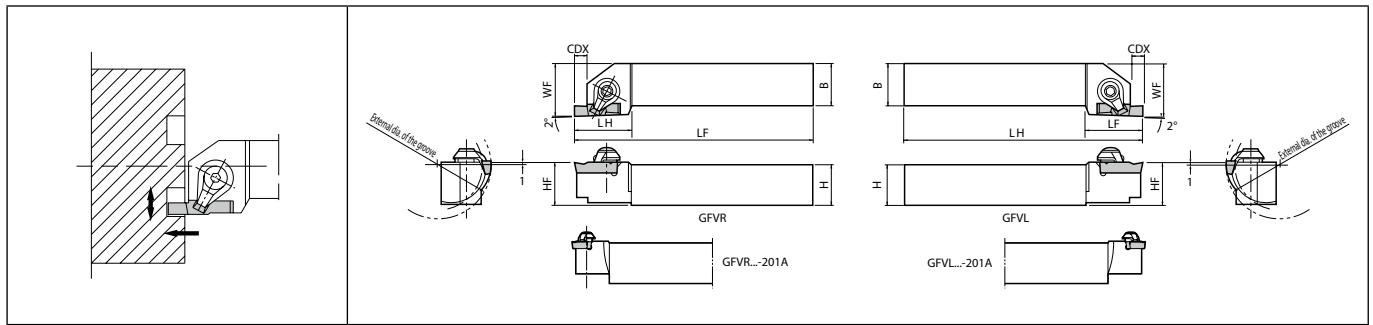

Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)							Spare parts				Applicable inserts G126
												Clamp set	Clamp set	Wrench	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	LF	WF					
GVF [°] /L 2020K-201A	●	●	20	∞	2.2	20	20	20	21	125	25	CPS-5V	-	-	FT-15	GVF [°] /L200 ~ 340-...A
2525M-201A	●	●	(12)	(∞)		25	25	23	26	150	32					GVF [°] /L200 ~ 300-...AR
GVF [°] /L 2020K-351B	●	●	35	50	4.6	20	20	28	21	125	25	-	CPS-6V	LW-3	-	GVF [°] /L250 ~ 350-...B
2525M-351B	●	●				25	25	30	26	150	32					GVF [°] /L300-150BR
2020K-352B	●	●	(25)	(∞)	5.1	20	20	28	21	125	25					GVF [°] /L400 ~ 490-...B
2525M-352B	●	●				25	25	30	26	150	32					GVF [°] /L400-200BR
2020K-501B	●	●	50	70	4.6	20	20	28	21	125	25					GVF [°] /L250 ~ 350-...B
2525M-501B	●	●				25	25	30	26	150	32					GVF [°] /L300-150BR
2020K-502B	●	●	(25)	(∞)	5.1	20	20	28	21	125	25					GVF [°] /L400 ~ 490-...B
2525M-502B	●	●				25	25	30	26	150	32					GVF [°] /L400-200BR
2020K-701B	●	●	70	100	4.6	20	20	28	21	125	25					GVF [°] /L250 ~ 350-...B
2525M-701B	●	●				25	25	30	26	150	32					GVF [°] /L300-150BR
2020K-702B	●	●	(25)	(∞)	5.1	20	20	28	21	125	25					GVF [°] /L400 ~ 490-...B
2525M-702B	●	●				25	25	30	26	150	32					GVF [°] /L400-200BR
GVF [°] /L 2525M-501C	●	●	50	70	6.6	25	25	35	26	150	32	-	CPS-8V	LW-4	-	GVF [°] /L350 ~ 450-...C
2525M-502C	●	●	(25)	(∞)	8.1											GVF [°] /L500 ~ 600-...C
2525M-701C	●	●	70	100	6.6											GVF [°] /L350 ~ 450-...C
2525M-702C	●	●	(25)	(∞)	8.1											GVF [°] /L500 ~ 600-...C
2525M-1001C	●	●	100	150	6.6											GVF [°] /L350 ~ 450-...C
2525M-1002C	●	●	(25)	(∞)	8.1											GVF [°] /L500 ~ 600-...C
2525M-1501C	●	●	150	250	6.6											GVF [°] /L350 ~ 450-...C
2525M-1502C	●	●	(25)	(∞)	8.1											GVF [°] /L500 ~ 600-...C


CDX shows available grooving depth.

The value () of External dia. of the groove (DAXX) is the maximum outer diameter value after the initial groove between DAXN ~ DAXX. (It is possible to widen the groove to infinity ∞).

The value () of External dia. of the groove (DAXN) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between DAXN ~ DAXX.

Standard toolholders are designed with the edge position 1.0 mm above the center. When using non-standard toolholders, set the edge position 1.0 mm above the center.

Selection of Toolholder & Insert

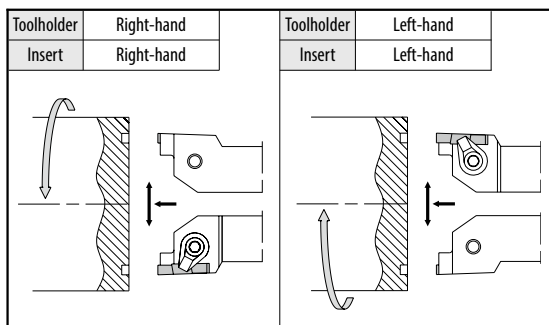

● : Standard item



External dia. of the groove of GVF

(1) e.g.) GVF^R/L...-201A


Description	External dia. of the groove (mm)		Applicable inserts
	DAXN (min.)	DAXX (max.)	
GVF ^R /L 2020K-201A	20	∞	GVF ^R /L 200 ~ 340...A
2525M-201A	(12)	(∞)	GVF ^R /L 200 ~ 300...AR

• It is available to infinity ∞ in case of machining the first groove bigger than DAXN.

• When machining towards the outer diameter then there is no MAX. limit to the further groove machining.


• When machining the initial groove on the face at DAXN ø20

If the initial groove is made smaller than this, the toolholder interferes with the workpiece. Boss Dia. depends on insert width.

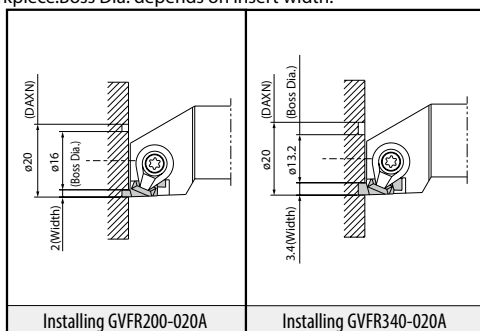Installing GVF^R200-020AInstalling GVF^R340-020A

• When widening the groove width to inner diameter.

Face groove diameter DAXN (12) is the limit; the toolholder interferes with the workpiece in case of smaller than ø12. The toolholder interferes with the workpiece when closer to the center.

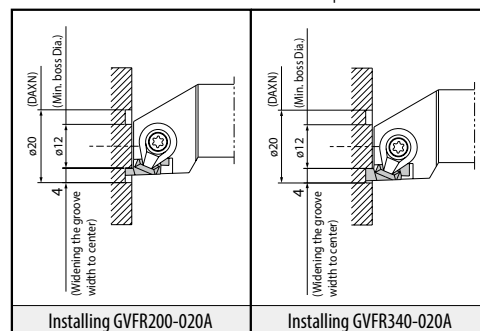
Installing GVF^R200-020AInstalling GVF^R340-020A(2) e.g.) GVF^R/L...-351B/352B (same as GVF^R/L...-○○○B or GVF^R/L...-○○○C)

Description	External dia. of the groove (mm)		Applicable inserts
	DAXN (min.)	DAXX (max.)	
GVF ^R /L 2020K-351B	35 (25)	50 (∞)	GVF ^R /L 250 ~ 350...B
2525M-351B			GVF ^R /L 300-150BR
2020K-352B			GVF ^R /L 400 ~ 490...B
2525M-352B			GVF ^R /L 400-200BR

• It is possible to widen the groove to infinity ∞ when machining the initial groove within DAXN ~ DAXX and then widening to outer diameter.


• When machining the initial groove on the face at DAXN ø35

If the initial groove is made smaller than this, the toolholder interferes with the workpiece. Boss Dia. depends on insert width.

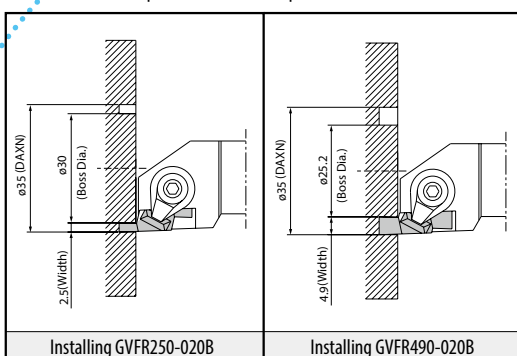Installing GVF^R250-020BInstalling GVF^R490-020B



• When machining the initial groove on the face at DAXX ø50.

If the initial groove is made larger than this, the toolholder interferes with the workpiece. Boss Dia. depends on insert width.

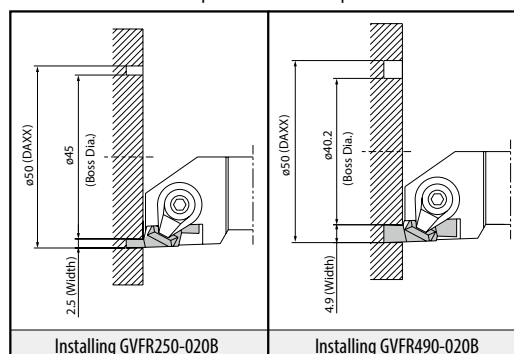
Installing GVF^R250-020BInstalling GVF^R490-020B

• When widening the groove width to inner diameter.

ø25 Boss Dia. is the limitation regardless of insert width, even widening the groove width to the center from the initial groove at DAXN (ø35) or DAXX (ø50). The toolholder interferes with the workpiece when closer to the center.

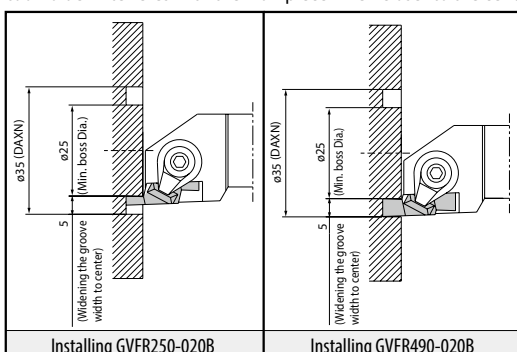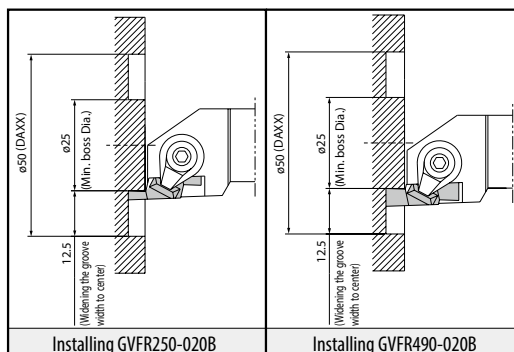Installing GVF^R250-020BInstalling GVF^R490-020BInstalling GVF^R250-020BInstalling GVF^R490-020B

GFVS (Face grooving)

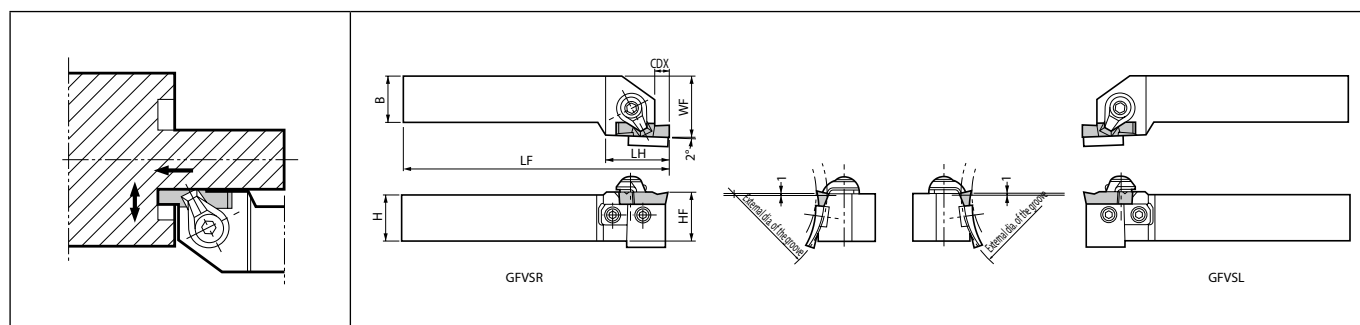

Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.
This toolholder can machine various face grooving diameters by replacing the blade.

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)							Spare parts				Applicable inserts G126
												Blade	Bolt	Clamp set	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	LF	WF					
GFVS% 2020K-351B 2525M-351B 2020K-352B 2525M-352B 2020K-501B 2525M-501B 2020K-502B 2525M-502B 2020K-701B 2525M-701B 2020K-702B 2525M-702B	●	●	35 (25)	50 (∞)	5.1 (4.6)	20	20	30	21	125	25	SF%/-351B	HH4X12	CPS-6V	LW-3	GVF% _R 250 ~ 350-...B GVF% _R 300-150BR
	●	●				25	25	32	26	150	32	SF%/-352B				GVF% _R 400 ~ 490-...B GVF% _R 400-200BR
	●	●			5.1 (5.1)	20	20	30	21	125	25	SF%/-501B				GVF% _R 250 ~ 350-...B GVF% _R 300-150BR
	●	●				25	25	32	26	150	32	SF%/-502B				GVF% _R 400 ~ 490-...B GVF% _R 400-200BR
	●	●	50 (25)	70 (∞)	5.1 (4.6)	20	20	30	21	125	25	SF%/-701B				GVF% _R 250 ~ 350-...B GVF% _R 300-150BR
	●	●				25	25	32	26	150	32	SF%/-702B				GVF% _R 400 ~ 490-...B GVF% _R 400-200BR
	●	●			5.1 (5.1)	20	20	30	21	125	25	SF%/-701B				GVF% _R 250 ~ 350-...B GVF% _R 300-150BR
	●	●				25	25	32	26	150	32	SF%/-702B				GVF% _R 400 ~ 490-...B GVF% _R 400-200BR
	●	●	70 (25)	100 (∞)	5.1 (4.6)	20	20	30	21	125	25	SF%/-501C	HH4X12	CPS-8V	LW-4	GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C
	●	●				25	25	32	26	150	32	SF%/-502C				GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C
	●	●			8.1 (*5.1)	25	25	32	26	150	32	SF%/-701C				GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C
	●	●										SF%/-702C				GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C
GFVS% 2525M-501C 2525M-502C 2525M-701C 2525M-702C 2525M-1001C 2525M-1002C 2525M-1501C 2525M-1502C	●	●	50 (25)	70 (∞)	8.1 (*5.1)							SF%/-1001C				GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C
	●	●			8.1 (8.1)							SF%/-1002C				GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C
	●	●	70 (25)	100 (∞)	8.1 (*5.1)							SF%/-1501C				GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C
	●	●			8.1 (8.1)							SF%/-1502C				GVF% _R 350 ~ 450-...C GVF% _R 500 ~ 600-...C

CDX shows available grooving depth.

The value () of External dia. of the groove (DAXX) is the maximum outer diameter value after the initial groove between DAXN ~ DAXX. (It is possible to widen the groove to infinity ∞).

The value () of External dia. of the groove (DAXN) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between DAXN ~ DAXX.

Standard toolholders are designed with the edge position 1.0 mm above the center. When using non-standard toolholders, set the edge position 1.0 mm above the center.


CDX shows the distance from the toolholder to the cutting edge. The grooving depth is the mentioned in ().

GFVS is composed of a base-holder and a blade. If the blade should be damaged, replace it with a new blade as listed in the table on G131.

(e.g.) GFVSR2020K-HB + SFR-351B = GFVSR2020K-351B

*GVF%_R400~450-040C: CDX is 6.6

GFVT (Face grooving)

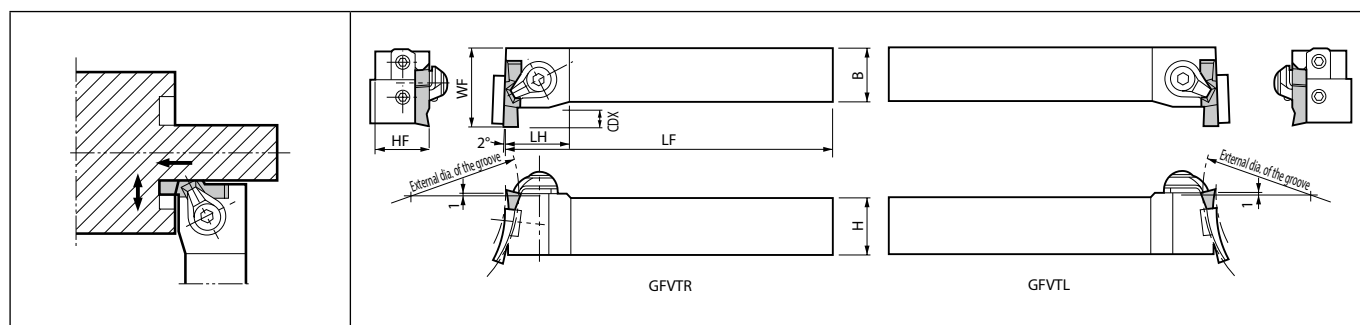

Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.
This toolholder can machine various face grooving diameters by replacing the blade.

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)							Spare parts				Applicable inserts 🔩 G126						
												Blade	Bolt	Clamp set	Wrench							
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	LF	WF											
GFVT ^{90°} /L 2020K-351B 2525M-351B 2020K-352B 2525M-352B 2020K-501B 2525M-501B 2020K-502B 2525M-502B 2020K-701B 2525M-701B 2020K-702B 2525M-702B	●	●	35 (25)	50 (∞)	5.1 (4.6)	20	20	22	21	125	30	SF ^{90°} /L-351B	HH4X12	CPS-6V	LW-3	GVF ^{90°} /R250 ~ 350-...B						
	●	●			5.1 (5.1)	25	25	25	26	150	35	SF ^{90°} /L-352B				GVF ^{90°} /R300-150BR						
	●	●				20	20	22	21	125	30					GVF ^{90°} /R400 ~ 490-...B						
	●	●				25	25	25	26	150	35					GVF ^{90°} /R400-200BR						
	●	●	50 (25)	70 (∞)	5.1 (4.6)	20	20	22	21	125	30	SF ^{90°} /L-501B				HH4X12	CPS-6V	LW-3	GVF ^{90°} /R250 ~ 350-...B			
	●	●			5.1 (5.1)	25	25	25	26	150	35	SF ^{90°} /L-502B							GVF ^{90°} /R300-150BR			
	●	●				20	20	22	21	125	30								GVF ^{90°} /R400 ~ 490-...B			
	●	●				25	25	25	26	150	35								GVF ^{90°} /R400-200BR			
	●	●	70 (25)	100 (∞)	5.1 (4.6)	20	20	22	21	125	30	SF ^{90°} /L-701B							HH4X12	CPS-6V	LW-3	GVF ^{90°} /R250 ~ 350-...B
	●	●			5.1 (5.1)	25	25	25	26	150	35	SF ^{90°} /L-702B										GVF ^{90°} /R300-150BR
	●	●				20	20	22	21	125	30											GVF ^{90°} /R400 ~ 490-...B
	●	●				25	25	25	26	150	35											GVF ^{90°} /R400-200BR
GFVT ^{90°} /L 2525M-501C 2525M-502C 2525M-701C 2525M-702C 2525M-1001C 2525M-1002C 2525M-1501C 2525M-1502C	●	●	50 (25)	70 (∞)	8.1 (*5.1)	25	25	27	26	150	38	SF ^{90°} /L-501C	HH4X12	CPS-8V	LW-4							GVF ^{90°} /R350 ~ 450-...C
	●	●	8.1 (8.1)	SF ^{90°} /L-502C	GVF ^{90°} /R500 ~ 600-...C																	
	●	●	70 (25)	100 (∞)	8.1 (*5.1)							SF ^{90°} /L-701C										GVF ^{90°} /R350 ~ 450-...C
	●	●	8.1 (8.1)	SF ^{90°} /L-702C	GVF ^{90°} /R500 ~ 600-...C																	
	●	●	100 (25)	150 (∞)	8.1 (*5.1)							SF ^{90°} /L-1001C				GVF ^{90°} /R350 ~ 450-...C						
	●	●	8.1 (8.1)	SF ^{90°} /L-1002C	GVF ^{90°} /R500 ~ 600-...C																	
	●	●	150 (25)	250 (∞)	8.1 (*5.1)							SF ^{90°} /L-1501C				GVF ^{90°} /R350 ~ 450-...C						
	●	●	8.1 (8.1)	SF ^{90°} /L-1502C	GVF ^{90°} /R500 ~ 600-...C																	

CDX shows available grooving depth.

The value () of External dia. of the groove (DAXX) is the maximum outer diameter value after the initial groove between DAXN ~ DAXX. (It is possible to widen the groove to infinity ∞).

The value () of External dia. of the groove (DAXN) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between DAXN ~ DAXX.

Standard toolholders are designed with the edge position 1.0 mm above the center. When using non-standard toolholders, set the edge position 1.0 mm above the center.

CDX shows the distance from the toolholder to the cutting edge. The grooving depth is the mentioned in ().

GFVT is composed of a base-holder and a blade. If the blade should be damaged, replace it with a new blade as listed in the table on G131.

(e.g.) GFVTR2020K-HB + SFR-351B = GFVTR2020K-351B

*GVF^{90°}/R400~450-040C: CDX is 6.6

● : Standard item

Selection of Toolholder & Insert

GFVS				GFVT			
Toolholder	Right-hand		Toolholder	Left-hand		Toolholder	Right-hand
Insert	Left-hand		Insert	Right-hand		Insert	Left-hand

Combination of Base-Holder & Blade

Toolholder Description (Stamped below)	Stock		Blade Description	Toolholder Description (Unit Description)		Example of installation (GFVS)	How to refer to the face grooving toolholder and blade
	R	L					
GFVS ^{R/L} 2020K-HB GFVT ^{R/L} 2020K-HB	●	●	SF ^{R/L}	GFVS ^{R/L} 2020K	-351B		Q : Though "GFVSR2525M-HC" is marked on the face grooving toolholder, the size of cutting dia. is unknown. How could it be found out? A : Take off the blade. Description of the blade is listed on the back of the blade. Using the description, check the description of the toolholder in the catalog. If "SFR-1001C" is integrated to "GFVSR2525M-HC", the description of the toolholder is "GVFSR2525M-1001C".
			-351B	GFVT ^{R/L} 2020K	-352B		
			-501B		-501B		
			-502B		-502B		
			-701B		-701B		
			-702B		-702B		
GFVS ^{R/L} 2525M-HB GFVT ^{R/L} 2525M-HB	●	●	SF ^{R/L}	GFVS ^{R/L} 2525M	-351B		
			-351B	GFVT ^{R/L} 2525M	-352B		
			-501B		-501B		
			-502B		-502B		
			-701B		-701B		
			-702B		-702B		
GFVS ^{R/L} 2525M-HC GFVT ^{R/L} 2525M-HC	●	●	SF ^{R/L}	GFVS ^{R/L} 2525M	-501C		
			-501C	GFVT ^{R/L} 2525M	-502C		
			-701C		-701C		
			-702C		-702C		
			-1001C		-1001C		
			-1002C		-1002C		
			-1501C		-1501C		
			-1502C		-1502C		

● : Right-hand Blade for Right-hand Toolholder, Left-hand Blade for Left-hand Toolholder.

● : Installation of GFVT is also pursuing example of installation of GFVS.



Blade Dimensions

Shape	Description	Stock		Dimension (mm)				External dia. of the groove (mm)		Applicable Inserts	Applicable Toolholders	
		R	L	L	H	T	W	DAXN (min.)	DAXX (max.)			
Stamped side Top shape of 501C, 701C, 1001C, 1501C	SF ^{R/L} -351B	●	●	30.5	11	4.7	2.0	35	50	GVF%250~350-020B GVF%300-150BR	GVF(S/T) ^{R/L} ○○○○□ -○○○B (Toolholder Stamp GVF(S/T) ^{R/L} ○○○○□-HB)	
	-352B	●	●				3.4			GVF%400~490-020B GVF%400-200BR		
	SF ^{R/L} -501B	●	●				2.0	50	70	GVF%250~350-020B GVF%300-150BR		
	-502B	●	●				3.4			GVF%400~490-020B GVF%400-200BR		
	SF ^{R/L} -701B	●	●	30.5	15	4.7	2.0	70	100	GVF%250~350-020B GVF%300-150BR	GVF(S/T) ^{R/L} ○○○○□ -○○○B (Toolholder Stamp GVF(S/T) ^{R/L} ○○○○□-HB)	
	-702B	●	●				3.4			GVF%400~490-020B GVF%400-200BR		
	SF ^{R/L} -501C	●	●	35	15	7.5	2.8	50	70	GVF%350~450-040C	GVF(S/T) ^{R/L} ○○○○□ -○○○C (Toolholder Stamp GVF(S/T) ^{R/L} ○○○○□-HC)	
	-502C	●	●				4.3			GVF%500~600-040C		
	SF ^{R/L} -701C	●	●				2.8	70	100	GVF%350~450-040C		
	-702C	●	●				4.3			GVF%500~600-040C		
	SF ^{R/L} -1001C	●	●		20		2.8	100	150	GVF%350~450-040C		
	-1002C	●	●				4.3			GVF%500~600-040C		
	SF ^{R/L} -1501C	●	●	23	23		2.8	150	250	GVF%350~450-040C		
	-1502C	●	●				4.3			GVF%500~600-040C		

● Right-hand shown

• Right-hand Blade for Right-hand Toolholder,
Left-hand Blade for Left-hand Toolholder.

External dia. of the groove of GFVS / GFVT

e.g.) GFVS^{R/L}...-351B/352B

(same as GFVS^{R/L}...-○○○B, ...-○○○C) **G129**


GFVT^{R/L}...-○○○B, ...-○○○C) **G130**

Description	External dia. of the groove (mm)		Applicable inserts
	DAXN (min.)	DAXX (max.)	
GFVS ^{R/L} 2020K-351B	35 (25)	50 (∞)	GVF ^{R/L} 250 ~ 350-...B
2525M-351B			GVF ^{R/L} 300-150BR
2020K-352B			GVF ^{R/L} 400 ~ 490-...B
2525M-352B			GVF ^{R/L} 400-200BR

• It is possible to widen the groove to infinity ∞ when machining the initial groove within DAXN ~ DAXX and then widening to outer diameter.


• When machining the initial groove on the face at DAXN ø35

If the initial groove is made smaller than this, the toolholder interferes with the workpiece. Boss Dia. depends on insert width.

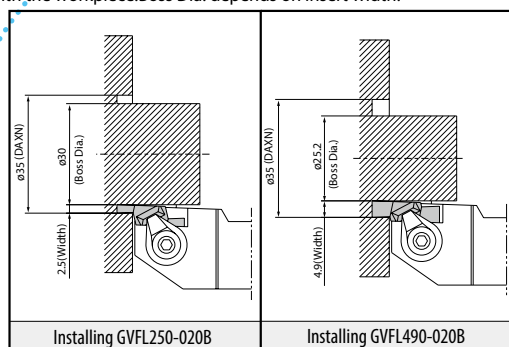



• When machining the initial groove on the face at DAXX ø50

If the initial groove is made larger than this, the toolholder interferes with the workpiece. Boss Dia. depends on insert width.

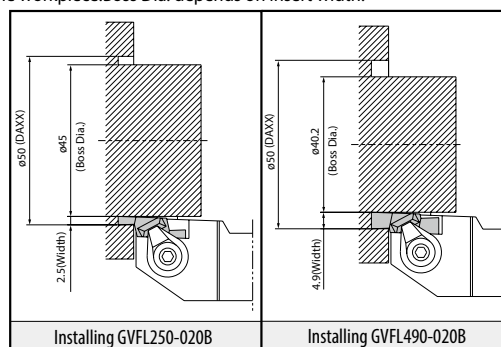


• When widening the groove width to inner diameter

ø25 Boss Dia. is the limitation regardless of insert width, even widening the groove width to the center from the initial groove at DAXN (ø35) or DAXX (ø50). The toolholder interferes with the workpiece when closer to the center.

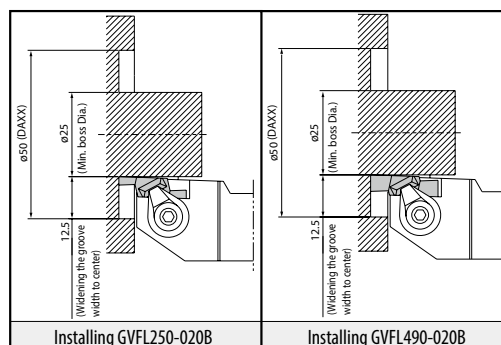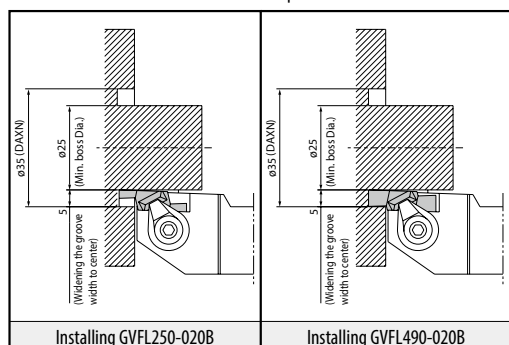

● : Standard item

GIFV (Face grooving)

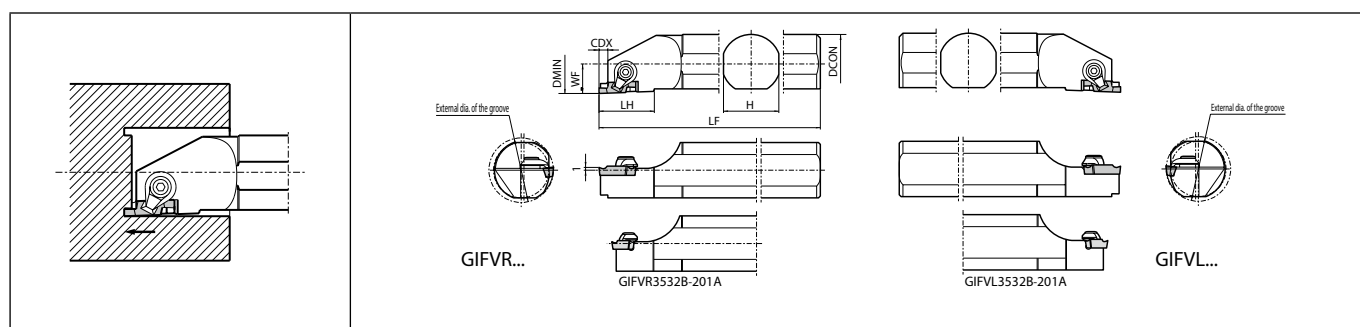

Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder.

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)								Spare parts				Applicable inserts G126
													Clamp set	Clamp set	Wrench	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	DMIN	DCON	CDX	H	LH	LF	WF						
GIFV ^{R/L} 3532B-201A	●	●	35 (12)	∞ (∞)	35	32	2.2	30	23	250	16		CPS-5V	-	-	FT-15	GVF ^{R/L} ...-...A(R)
GIFV ^{R/L} 3532B-351B 3532B-352B 5032B-501B 5032B-502B	●	●	35 (25)	50 (∞)	35		4.6										GVF ^{R/L} 250 ~ 350-...B(R)
	●	●					5.1										GVF ^{R/L} 400 ~ 490-...B(R)
	●	●	50 (25)	70 (∞)	50		4.6	30	30	250	16	-	CPS-6V	LW-3	-		GVF ^{R/L} 250 ~ 350-...B(R)
	●	●					5.1										GVF ^{R/L} 400 ~ 490-...B(R)
GIFV ^{R/L} 5032B-501C 5032B-502C	●	●	50 (25)	70 (∞)	50	32	6.6	30	35	250	16	-	CPS-8V	LW-4	-		GVF ^{R/L} 350 ~ 450-040C
	●	●					8.1										GVF ^{R/L} 500 ~ 600-040C

CDX shows available grooving depth.

Standard toolholders are designed with the edge position 1.0 mm above the center.

External dia. of the groove depends on the application.




Applications	Description	Internal dia. of the groove		External dia. of the groove		Remarks
		(min.)	(max.)	DAXN [min.]	DAXX [max.]	
	GIFV ^{R/L} 3532B-201A				∞	
	GIFV ^{R/L} 3532B-351B			35	50	
	3532B-352B					
	5032B-501B					
	5032B-502B					
	GIFV ^{R/L} 5032B-501C 5032B-502C			50	70	
	GIFV ^{R/L} 3532B-201A	12			∞	If $\phi D1 \geq 58-2CW$, the Face Grooving Dia. can be expanded to Internal dia. of the groove (min.) toward the Center. CW = Edge Width
	GIFV ^{R/L} 3532B-351B			35	50	
	3532B-352B					
	5032B-501B	25				
	5032B-502B					
	GIFV ^{R/L} 5032B-501C 5032B-502C			50	70	
	GIFV ^{R/L} 3532B-201A	12			∞	If $\phi D1 \geq 75-2CW$, the Face Grooving Dia. can be expanded to Internal dia. of the groove (min.) toward the Center. CW = Edge Width
	GIFV ^{R/L} 3532B-351B			35	50	
	3532B-352B					
	5032B-501B	25				
	5032B-502B					
	GIFV ^{R/L} 5032B-501C 5032B-502C			50	70	

The value () of External dia. of the groove (max.) is the maximum outer diameter value after the initial groove between DAXN ~ DAXX (It is possible to widen the groove to infinity ∞).

The value () of Internal dia. of the groove (min.) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between DAXN ~ DAXX.

● : Standard item

FMM/FMN

		Carbon steel / Alloy steel													P
		Stainless steel													M
		Cast iron													K
		Non-ferrous metals													N
		Titanium alloy													S
		Hard materials (~ 40HRC)													H
		Hard materials (40HRC ~)													
Insert		Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide				Cermat	Applicable toolholder ➡ G135,G136
				CW	S	RE	INSL	CW min.	CW max.	CVD	PVD	-	-		
										CR9025	PR905	PR915	PR930		
	 Chip control oriented / M class	FMM 30-03	1	3	3.5	0.3	12	- 0.05	+ 0.05	●	●	●	●	●	KFMS®/L...-3
		FMM 40-04	1	4	3.5	0.4	12	- 0.05	+ 0.05	●	●	●	●	●	KFMS®/L...-4
		FMM 50-04	1	5	3.5	0.4	12	- 0.05	+ 0.05	●	●	●	●	●	KFMS®/L...-5
		FMM 60-04	1	6	3.5	0.4	12	- 0.05	+ 0.05	●	●	●	●	●	
	 Sharp cutting oriented / M class	FMN 3	1	3	3.5	0.25	12	- 0.05	+ 0.05	●		●	●	●	KFMS®/L...-3
		FMN 4	1	4	3.5	0.25	12	- 0.05	+ 0.05	●		●	●	●	KFMS®/L...-4
		FMN 5	1	5	3.5	0.25	12	- 0.05	+ 0.05	●		●	●	●	KFMS®/L...-5
		FMN 6	1	6	3.5	0.25	12	- 0.05	+ 0.05	●		●	●	●	

FMN inserts are only for Deep Grooving and not applicable for Turning.

Recommended cutting conditions

Workpiece material	Recommended insert grades (Vc: m/min)						Face grooving (FMM / FMN)			Turning (FMM)			Remarks
	Cermet	CVD coated carbide	PVD coated carbide			Carbide	Edge width (mm)			Edge width (mm)			
	TN90	CP9025	PR915	PR930	PR905	KW10	3.0	4.0	5.0 / 6.0	3.0	4.0	5.0 / 6.0	
							f (mm/rev)			f (mm/rev)			
Carbon steel	☆ 100~220	☆ 80~200	☆ 80~200	★ 80~200	-	-	0.03~0.05	0.03~0.08	0.05~0.10	0.05~0.10	0.05~0.25	0.10~0.30	Coolant
Alloy steel	☆ 80~200	☆ 70~180	☆ 70~180	★ 70~180	-	-	0.03~0.05	0.03~0.08	0.05~0.10	0.05~0.10	0.05~0.25	0.10~0.30	
Stainless steel	☆ 70~160	☆ 60~150	★ 60~150	☆ 60~150	-	-	0.03~0.05	0.03~0.08	0.05~0.10	0.05~0.10	0.05~0.25	0.10~0.30	
Cast iron	-	-	-	-	★ 80~180	☆ 70~150	0.03~0.05	0.03~0.08	0.05~0.10	0.05~0.10	0.05~0.25	0.10~0.30	
Aluminum alloys	-	-	-	-	-	★ 200~500	0.03~0.05	0.03~0.08	0.05~0.10	0.05~0.10	0.05~0.25	0.10~0.30	
Brass	-	-	-	-	-	★ 100~200	0.03~0.05	0.03~0.08	0.05~0.10	0.05~0.10	0.05~0.25	0.10~0.30	

• Set the feed rate 1/100 of edge width on the first groove and check chip evacuation.

• FMN type Inserts are only for deep grooving, and when used for turning, set to $a_p = 0.2$ mm and under.

★ : 1st recommendation ☆ : 2nd recommendation

Refer to the notes below for turning conditions

a_p and f of FMM

	Recommended cutting conditions	
a_p (MAX.) (mm)	under 50% of edge width	$a_p \leq 0.5CW$
f (MAX.) (mm/rev)	under 3~5% of edge width	$f \leq [0.03(\text{Min.}) \sim 0.05(\text{Max.})]CW$

$a_p \times f$ should be as follows.


Load (mm ²) \ Edge Width (mm)	3.0	4.0	5.0	6.0
$a_p \times f$	~0.09	~0.14	~0.25	~0.36

$a_p \times f \leq 0.01CW^2$

● : Standard item

G134

KFMS (Face grooving)

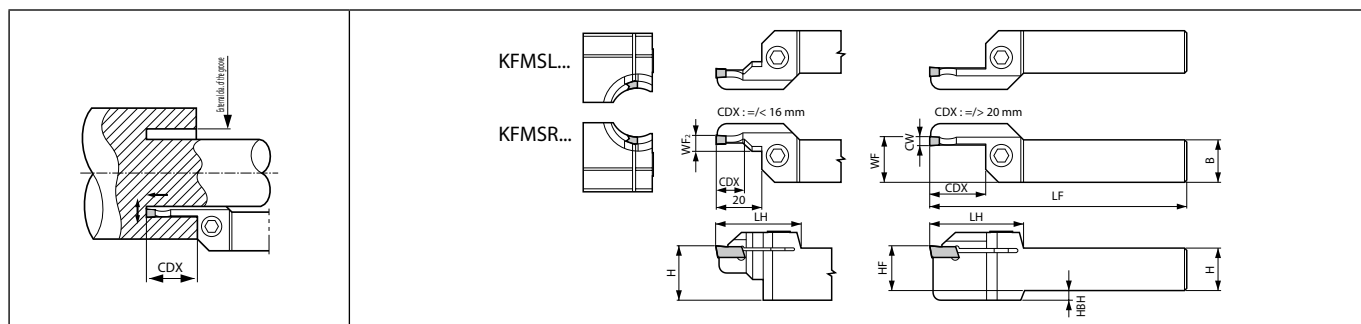

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)												Spare parts		Applicable inserts ➡ G134		
																	Clamp bolt	Wrench			
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	HBH	LF	WF	WF ₂	CW							
KFMS% 2020K2530-3 2020K3040-3 2020K4050-3 2020K5065-3 2020K6585-3 2020K85110-3 2020K110145-3 2525M2530-3 2525M3040-3 2525M4050-3 2525M5065-3 2525M6585-3 2525M85110-3 2525M110145-3	●		25	30	13	20	20	39		-	125	20.7	6.1	3	HH5X20	LW-4	FMM30-03 FMN3				
	●		30	40																	
	●		40	50																	
	●		50	65	22				41	20								3	HH5X20		
	●		65	85																	
	●		85	110	25				44	5				-							
	●		110	145				44													
	●	●	25	30	13	25	25	39		-	150	25.7	6.1	3	HH5X25						
	●	●	30	40																	
	●	●	40	50																	
	●	●	50	65	22				41	25								3	HH5X25		
	●	●	65	85																	
	●	●	85	110	25				44					-							
	●	●	110	145																	
KFMS% 2020K2535-4 2020K3550-4 2020K5070-4 2020K70100-4 2020K100150-4 2020K150220-4 2020K220800-4 2525M2535-4 2525M3550-4 2525M5070-4 2525M70100-4 2525M100150-4 2525M150220-4 2525M220800-4	●		25	35	12	20	20	39		-	125	20.7	7.1	4	HH5X20	LW-4	FMM40-04 FMN4				
	●		35	50	20																
	●		50	70	25																
	●		70	100				20			125	20.7		4	HH5X20						
	●		100	150				44		5											
	●		150	220																	
	●		220	∞	25	25								4	HH5X25						
	●	●	25	35			12	39					7.1								
	●	●	35	50			20														
	●	●	50	70			25								4			HH5X25			
	●	●	70	100						25	-	150	25.7								
	●	●	100	150						44											
	●	●	150	220			25											4	HH5X25		
	●	●	220	∞																	

CDX shows available grooving depth.

External dia. of the groove : The diameter range of the initial groove.

KFMS will be switched to KGDF=> G114 ~ G118

● : Standard item

G



Grooving

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)											Spare parts		Applicable inserts ➡ G134
																Clamp bolt	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	HH	LF	WF	WF ₂	CW				
KFMS ^{R/L} 2020K2535-5 2020K3550-5 2020K5075-5 2020K75115-5 2020K115180-5 2020K180235-5 2020K235800-5 2525M2535-5 2525M3550-5 2525M5075-5 2525M75115-5 2525M115180-5 2525M180235-5 2525M235800-5	●		25	35	20	20	20	39	20	-	125	20.7 (21.2)	5	5 (6)	HH5X20	LW-4	FMM50-04 FMN5 FMM60-04 FMN6	
	●		35	50														44
	●		50	75	25			44		5								
	●		75	115											32			44
	●		115	180	25			44		5								
	●		180	235											32			44
	●		235	∞	20			44		5								
	●	●	25	35											25			44
	●	●	35	50	25			44		5								
	●	●	50	75											32			44
	●	●	75	115	32			44		5								
	●	●	115	180											32			44
	●	●	180	235	32			44		5								
	●	●	235	∞											32			44



CDX shows available grooving depth.

External dia. of the groove : The diameter range of the initial groove.

For KFMS^{R/L}...-5 toolholder can hold a 6 mm width insert. () value shows the dimension of a 6mm width insert.


KFMS will be switched to KGDF=> G114 ~ G118

Selection of Toolholder & Insert

Toolholder	Right-hand		Toolholder	Left-hand	
Insert	(Neutral)		Insert	(Neutral)	

Limit of Turning toward Center

Turning towards the Center causes the toolholder to interfere with the groove wall depending on the initial cut's diameter.

Description	DMIN ₂				e.g.) KFMSR 2525M2530-3 with ø25 as first cut towards the center, it will cause a rubbing with the toolholder cartridge if ød is 4.0mm. *() value shows the Dimension using FMM60-04 Insert.
	25	26	27	28 and over	
	ød (mm)				(No remaining Boss)
KFMS ^{R/L} 2020K2530-3	4	2	0	0	
KFMS ^{R/L} 2525M2530-3	4	2	0	0	
KFMS ^{R/L} 2020K2535-4	6	3	0	0	
KFMS ^{R/L} 2525M2535-4	6	3	0	0	
KFMS ^{R/L} 2020K2535-5	7	4	1	1	(No remaining Boss)
KFMS ^{R/L} 2525M2535-5	*(5)	*(2)	*(0)	*(0)	


● : Standard item

Insert		Description	No. of edges	Dimension (mm)				Tolerance (mm)		Carbide					Cermets	Applicable toolholder ➡ G138
				CW	S	RE	INSL	CW min.	CW max.	CVD	PVD					
												CR9025	PR905	PR915		
	GMG 8030-050MG Sharp cutting oriented / Precision class (ground chipbreaker)	2	8	5.5	0.5	30	-0.03	+0.03	○	○		○	○	○		KFMS ⁹ /...-8
	GMGA 8030-400R Full R / Sharp cutting oriented / Precision class	2	8	5.5	4	30	-0.02	+0.02					○			
	GMM 8030-080MW Chip control oriented / M class	2	8	5.5	0.8	30	-0.05	+0.05	○	○		○	○	○		

Recommended cutting conditions ➡ **G143**

G137

KFMS-8 (Face grooving)

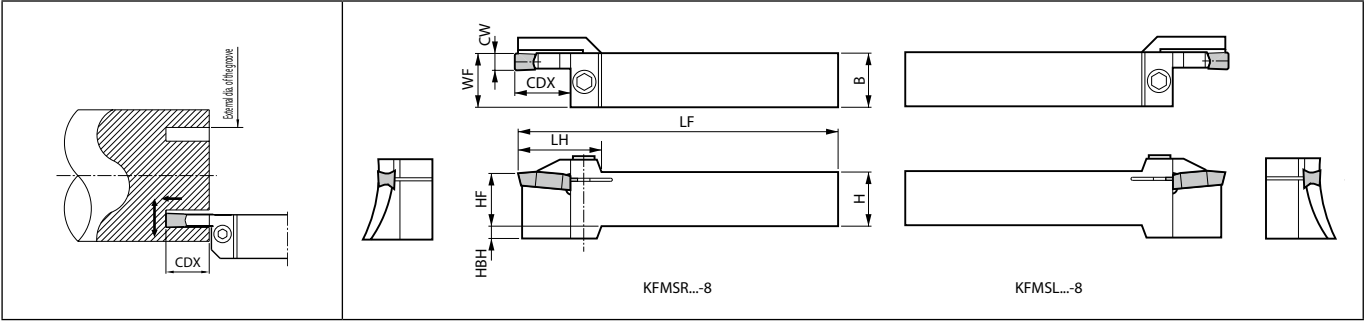

Toolholder dimensions

Description	Availability		External dia. of the groove (mm)		Dimension (mm)										Spare parts		Applicable inserts  G137
															Clamp bolt	Wrench	
	R	L	DAXN (min.)	DAXX (max.)	CDX	H	B	LH	HF	HBH	LF	WF	CW				
KFMS% 2525M5464-8 2525M6382-8 2525M80115-8 2525M105160-8 2525M155510-8 3232P155510-8	●	●	54 (0)	64 (∞)	25	25	25	41	25	- 2.4 6	150	26	8	HH6X25	LW-5	GMG8030-050MG GMGA8030-400R GMM8030-080MW	
	●	●	63 (0)	82 (∞)													
	●	●	80 (0)	115 (∞)													
	●	●	105 (0)	160 (∞)			40										
	●	●	155 (0)	510 (∞)													
	●				32	32	43	32	-	170	33						



CDX shows available grooving depth.

The value () of External dia. of the groove (DAXX) is the maximum outer diameter value after the initial groove between DAXN ~ DAXX. (It is possible to widen the groove to infinity ∞).


The value () of External dia. of the groove (DAXN) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between DAXN ~ DAXX.

● : Standard item

FTK

		Carbon steel / Alloy steel			●		P					
		Stainless steel			●		M					
		Cast iron				●	K					
		Non-ferrous metals				●	N					
		Titanium alloy				●	S					
		Hard materials (~ 40HRC)			○		H					
		Hard materials (40HRC ~)										
Insert		Description		No. of edges	Dimension (mm)		Tolerance (mm)		Carbide			Applicable toolholder ➡ G140
					CW	RE	CW min.	CW max.	CVD	PVD	-	
									CR9025	PR930	KW10	
		FTK 4	1	4	0.25	- 0.05	+ 0.05	●	●	●	KFTB®/....-4S	
		FTK 5	1	5	0.25	- 0.05	+ 0.05	●	●	●	KFTB®/....-5S	

Recommended cutting conditions ➡ G146

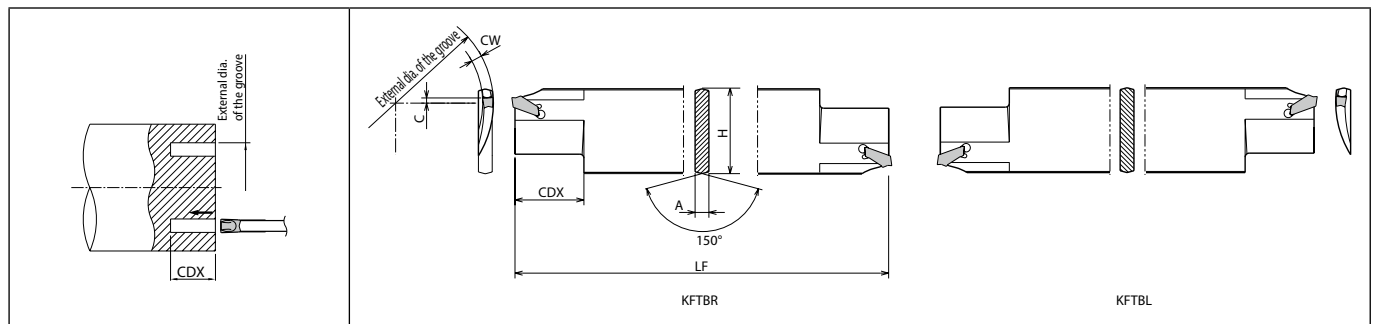KFTB (Face grooving blade)

Toolholder dimensions

Description		Availability		External dia. of the groove (mm)		Dimension (mm)					Spare parts	Applicable inserts ➡ G139	Applicable tool block ➡ H62, H63	
		R	L	DAXN (min.)	DAXX (max.)	CDX	H	A	C	LF	CW			Releasing wrench
														
KFTB%	65100-4S	●	●	65	100	25	32	5.2	4	150	4	LTK-5	FTK4	KPKTB...-32JCT KTKTB...-32 KTKTBF...-32
	90150-4S	●	●	90	150	30			0					
	150250-4S	●	●	140	250	30								
	250800-4S	●	●	230	∞									
KFTB%	90150-5S	●	●	90	150	30	32	5.2	0	150	5	LTK-5	FTK5	
	150250-5S	●	●	150	250	32								
	250800-5S	●	●	250	∞	38								

CDX shows available grooving depth.

External dia. of the groove : The diameter range of the initial groove.

The insert has Self-Clamping system and it is not suitable for tight tolerance grooves (tolerance $\pm 0.05\text{mm}$).

Lightly tap an Insert with a Plastic hammer. (End of insert does not touch toolholder.)

KFTB% 65100-4S toolholder is designed with the edge position 4 mm above the Center.

Dimension H shows virtual apex distance.

Selection of Blade and Insert

Combination of Blade + KTKTB			
Blade	Right-hand		
Insert	Neutral		
(Reverse mounting) Blade KFTBR + Block KTKTB (Normal mounting)			
Blade	Left-hand		
Insert	Neutral		
(Normal mounting) Blade KFTBL + Block KTKTB (Reverse mounting)			

Combination of Blade + KTKTBF			
Blade	Right-hand		
Insert	Neutral		
(Reverse mounting) Blade KFTBR + Block KTKTBF (Normal mounting)			
Blade	Left-hand		
Insert	Neutral		
(Normal mounting) Blade KFTBL + Block KTKTBF (Reverse mounting)			

● : Standard item

GBA inserts - ground chipbreaker

Workpiece material	Recommended insert grades (Vc: m/min)													Remarks
	MEGACOAT	MEGACOAT NANO	MEGACOAT NANO EX		MEGACOAT cermet	Cermet			PVD coated carbide		Carbide	CBN	PCD	
	PR1215	PR1625	PR2015	PR2025	PV7040	TN620	TC40N	TN90	PR930	PR905	KW10	KBN510 KBN525	KPD001 (KPD010)	
Carbon steel	☆ 80~200	☆ 80~180	★ 80~200	★ 80~180	☆ 150~240	★ 80~220	☆ 150~220	☆ 150~220	☆ 80~180	-	-	-	-	Coolant
Alloy steel	☆ 80~180	☆ 80~160	★ 80~180	☆ 80~160	☆ 130~220	★ 80~200	☆ 130~200	☆ 130~200	☆ 80~160	-	-	-	-	
Stainless steel	☆ 60~150	☆ 60~130	☆ 60~150	★ 60~130	-	-	-	☆ 70~150	☆ 60~130	-	-	-	-	
Cast iron	-	-	★ 80~180	-	-	-	-	-	-	☆ 80~180	☆ 60~120	★ 150~400	-	
Aluminum alloys	-	-	-	-	-	-	-	-	-	-	★ 150~400	-	★ 150~2,000	
Brass	-	-	-	-	-	-	-	-	-	-	★ 150~300	-	★ 200~800	
Hard materials	-	-	-	-	-	-	-	-	-	-	-	★ 80~120	-	

★ :1st recommendation ☆ :2nd recommendation

Workpiece material	(1) f for grooving (mm/rev) (2) f for turning (mm/rev) (3) ap for turning (mm)					Remarks
	GBA○○○ ^β /L 033~120-...	GBA○○○ ^β /L 125~225-...	GBA○○○ ^β /L 230~325-...	GBA○○○ ^β /L 330~350-...	GBA○○○ ^β /L 400~480-...	
	(1) 0.03~0.08 (2) Not recom. (3) Not recom.	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.8	
Carbon steel	(1) 0.03~0.08 (2) Not recom. (3) Not recom.	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.8	Coolant
Alloy steel	(1) 0.03~0.07 (2) Not recom. (3) Not recom.	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.09 (2) 0.05~0.09 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.8	
Stainless steel	(1) 0.03~0.07 (2) Not recom. (3) Not recom.	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.09 (2) 0.05~0.09 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.8	
Cast iron	(1) 0.03~0.08 (2) Not recom. (3) Not recom.	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.8	
Aluminum alloys	(1) 0.05~0.12 (2) Not recom. (3) Not recom.	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	
Brass	(1) 0.05~0.12 (2) Not recom. (3) Not recom.	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	
Hard materials	-	(1) 0.02~0.05 (2) Not recom. (3) Not recom.	(1) 0.03~0.07 (2) 0.01~0.04 (3) Max. 0.1	-	-	

* Above cutting condition is for external grooving. Set both cutting speed and feed 10% lower for internal grooving.

GBA inserts - GM chipbreaker

Workpiece material	Recommended insert grades (Vc: m/min)					(1) f for grooving (mm/rev) (2) f for turning (mm/rev) (3) ap for turning (mm)					Remarks
	MEGACOAT	MEGACOAT NANO	MEGACOAT NANO EX		Cermet						
	PR1215	PR1625	PR2015	PR2025	TN620	GBA43 ^β /L 140-010GM	GBA43 ^β /L 150-020GM	GBA43 ^β /L 175-020GM~ 230-020GM	GBA43 ^β /L 250-030GM~ 350-030GM	GBA43 ^β /L 400-040GM	
Carbon steel	☆ 80~220	☆ 80~220	★ 80~220	★ 80~220	★ 80~240	(1) 0.03~0.1 (2) 0.03~0.08 (3) Max. 0.2	(1) 0.03~0.12 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.03~0.12 (2) 0.03~0.09 (3) Max. 0.3	(1) 0.04~0.15 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.1 (3) Max. 0.8	Coolant
Alloy steel	☆ 80~200	☆ 80~200	★ 80~200	☆ 80~200	★ 80~220	(1) 0.03~0.1 (2) 0.03~0.08 (3) Max. 0.2	(1) 0.03~0.12 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.03~0.12 (2) 0.03~0.09 (3) Max. 0.3	(1) 0.04~0.15 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.1 (3) Max. 0.8	
Stainless steel	☆ 60~150	☆ 60~150	☆ 60~150	★ 60~150	-	(1) 0.03~0.1 (2) 0.03~0.08 (3) Max. 0.2	(1) 0.03~0.1 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.03~0.1 (2) 0.03~0.09 (3) Max. 0.3	(1) 0.04~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.04~0.12 (2) 0.05~0.1 (3) Max. 0.8	
Cast iron	-	-	★ 80~200	-	-	(1) 0.03~0.1 (2) 0.03~0.08 (3) Max. 0.2	(1) 0.03~0.12 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.03~0.12 (2) 0.03~0.09 (3) Max. 0.3	(1) 0.04~0.15 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.1 (3) Max. 0.8	

* Above cutting condition is for external grooving. Set both cutting speed and feed 20% lower for internal grooving.

★ :1st recommendation ☆ :2nd recommendation



Grooving

GBF

Workpiece material	Recommended insert grades (Vc: m/min)			(1) f for grooving (mm/rev)				Remarks
	MEGACOAT	MEGACOAT NANO	Carbide	(2) f for turning (mm/rev)				
	PRI215	PRI535	GW15	(3) ap for turning (mm)				
				GBF32%/ 025 – 053	GBF32%/ 065 – 095	GBF32%/ 100 – 145	GBF3%/ 150 – 300	
Carbon steel	★ 80~180	☆ 70~160	-	(1) 0.01~0.05	(1) 0.02~0.07	(1) 0.03~0.08	(1) 0.03~0.08	Coolant
				(2) Not recom.	(2) Not recom.	(2) 0.03~0.06	(2) 0.03~0.06	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Alloy steel	★ 80~180	☆ 70~160	-	(1) 0.01~0.04	(1) 0.02~0.06	(1) 0.03~0.07	(1) 0.03~0.07	
				(2) Not recom.	(2) Not recom.	(2) 0.02~0.05	(2) 0.02~0.05	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Stainless steel	☆ 60~130	★ 50~120	-	(1) 0.01~0.04	(1) 0.02~0.06	(1) 0.03~0.07	(1) 0.03~0.07	
				(2) Not recom.	(2) Not recom.	(2) 0.02~0.05	(2) 0.02~0.05	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Cast iron	-	-	★ 60~100	(1) 0.01~0.05	(1) 0.02~0.07	(1) 0.03~0.08	(1) 0.03~0.08	
				(2) Not recom.	(2) Not recom.	(2) 0.03~0.06	(2) 0.03~0.06	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Aluminum	-	-	★ 150~400	(1) 0.01~0.05	(1) 0.02~0.07	(1) 0.03~0.08	(1) 0.03~0.08	
				(2) Not recom.	(2) Not recom.	(2) 0.03~0.06	(2) 0.03~0.06	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Brass	-	-	★ 150~300	(1) 0.01~0.04	(1) 0.02~0.06	(1) 0.03~0.07	(1) 0.03~0.07	
				(2) Not recom.	(2) Not recom.	(2) 0.02~0.05	(2) 0.02~0.05	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	

★:1st recommendation ☆:2nd recommendation

GBF-000F inserts (RE=0.00)

Workpiece Material	Recommended insert grades (Vc: m/min)			(1) f for grooving (mm/rev)				Remarks
	MEGACOAT	MEGACOAT NANO	Carbide	(2) f for turning (mm/rev)				
	PRI215	PRI535	GW15	(3) ap for turning (mm)				
				GBF32 [®] /L 025 ~ 053 - 000F	GBF32 [®] /L 065 ~ 095 - 000F	GBF32 [®] /L 100 ~ 145 - 000F	GBF32 [®] /L 150 ~ 200 - 000F	
Carbon steel	★ 80 ~ 180	☆ 70 ~ 160	-	(1) 0.005~0.03	(1) 0.01~0.04	(1) 0.01~0.05	(1) 0.01~0.05	
				(2) Not recom.	(2) Not recom.	(2) 0.01~0.04	(2) 0.01~0.04	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Alloy steel	★ 80 ~ 180	☆ 70 ~ 160	-	(1) 0.005~0.025	(1) 0.01~0.03	(1) 0.01~0.04	(1) 0.01~0.04	
				(2) Not recom.	(2) Not recom.	(2) 0.01~0.03	(2) 0.01~0.03	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Stainless steel	☆ 60 ~ 130	★ 50 ~ 120	-	(1) 0.005~0.02	(1) 0.01~0.025	(1) 0.01~0.03	(1) 0.01~0.03	
				(2) Not recom.	(2) Not recom.	(2) 0.01~0.025	(2) 0.01~0.025	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Cast iron	-	-	★ 60 ~ 100	(1) 0.005~0.03	(1) 0.01~0.04	(1) 0.01~0.05	(1) 0.01~0.05	
				(2) Not recom.	(2) Not recom.	(2) 0.01~0.04	(2) 0.01~0.04	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Aluminum	-	-	★ 150 ~ 400	(1) 0.005~0.03	(1) 0.01~0.04	(1) 0.01~0.05	(1) 0.01~0.05	
				(2) Not recom.	(2) Not recom.	(2) 0.01~0.04	(2) 0.01~0.04	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	
Brass	-	-	★ 150 ~ 300	(1) 0.01~0.03	(1) 0.01~0.04	(1) 0.01~0.05	(1) 0.01~0.05	
				(2) Not recom.	(2) Not recom.	(2) 0.01~0.04	(2) 0.01~0.04	
				(3) Not recom.	(3) Not recom.	(3) Max. 0.2	(3) Max. 0.2	

★:1st recommendation ☆:2nd recommendation

GBF-GL inserts

Workpiece Material	Recommended insert rates (Vc: m/min)		(1) f for grooving (mm/rev)				Remarks
	MEGACOAT	MEGACOAT NANO	(2) f for turning (mm/rev)				
	PR1215	PR1535	(3) ap for turning (mm)				
			GBF32R075 - 005GL	GBF32R095 - 100-005GL	GBF32R150 - 200-010GL	GBF32R300 - 010GL	
Carbon Steel	★ 80 ~ 180	☆ 70 ~ 160	(1) 0.02~0.07	(1) 0.03~0.08	(1) 0.03~0.08	(1) 0.04~0.1	Coolant
			(2) Not recom.	(2) 0.03~0.06	(2) 0.03~0.06	(2) 0.04~0.08	
			(3) Not recom.	(3) Max. 0.2	(3) Max. 0.3	(3) Max. 0.5	
Alloy Steel	★ 80 ~ 180	☆ 70 ~ 160	(1) 0.02~0.06	(1) 0.03~0.07	(1) 0.03~0.07	(1) 0.04~0.09	
			(2) Not recom.	(2) 0.03~0.06	(2) 0.03~0.06	(2) 0.04~0.08	
			(3) Not recom.	(3) Max. 0.2	(3) Max. 0.3	(3) Max. 0.5	
Stainless Steel	☆ 60 ~ 130	★ 50 ~ 120	(1) 0.02~0.06	(1) 0.03~0.07	(1) 0.03~0.07	(1) 0.04~0.09	
			(2) Not recom.	(2) 0.03~0.06	(2) 0.03~0.06	(2) 0.04~0.08	
			(3) Not recom.	(3) Max. 0.2	(3) Max. 0.3	(3) Max. 0.5	

★:1st recommendation ☆:2nd recommendation

GMG / GMM / GMN / GMGA

Workpiece material	Recommended insert grades (Vc: m/min)						Grooving				Turning				Remarks	
	Cermet	CVD coated carbide	PVD coated carbide			Carbide	Edge width (mm)				Edge width (mm)					
			PR915	PR930	PR905		KW10	2.0~3.0	4.0	5.0	6.0 / 8.0	2.0~3.0	4.0	5.0		6.0 / 8.0
								f (mm/rev)				f (mm/rev)				
Carbon steel	☆ 100~220	☆ 80~200	☆ 80~200	★ 80~200	-	-	0.05~0.15	0.10~0.25	0.15~0.35	0.20~0.35	0.10~0.20	0.15~0.30	0.20~0.40	0.25~0.40	Coolant	
Alloy steel	☆ 80~200	☆ 70~180	☆ 70~180	★ 70~180	-	-	0.05~0.15	0.10~0.25	0.15~0.35	0.20~0.35	0.10~0.20	0.15~0.30	0.20~0.40	0.25~0.40		
Stainless steel	☆ 70~160	☆ 60~150	★ 60~150	☆ 60~150	-	-	0.05~0.15	0.10~0.20	0.15~0.35	0.20~0.35	0.10~0.20	0.15~0.25	0.20~0.40	0.25~0.40		
Cast iron	-	-	-	-	★ 100~200	☆ 70~150	0.05~0.20	0.10~0.30	0.15~0.40	0.20~0.40	0.10~0.25	0.15~0.35	0.20~0.45	0.25~0.45		
Aluminum alloys	-	-	-	-	-	★ 200~500	0.05~0.20	0.08~0.25	0.10~0.25	0.12~0.30	0.10~0.20	0.10~0.25	0.10~0.25	0.15~0.30		
Brass	-	-	-	-	-	★ 100~200	0.05~0.15	0.08~0.20	0.10~0.25	0.12~0.30	0.10~0.20	0.10~0.25	0.10~0.25	0.15~0.30		

★:1st recommendation ☆:2nd recommendation

Refer to the notes below for turning conditions

1. When using KGM toolholder

	Recommended cutting conditions	
ap (max.) (mm)	80% or under of edge width	ap ≤ 0.8CW
f (max.) (mm/rev)	10% or under of edge width	f ≤ 0.1CW

(ap) x (f) shall not exceed 1/2 of ap (max.) x f (max.)

Load(mm ²)	Edge width(mm)	2.0~2.5	3.0	4.0	5.0	6.0	8.0
ap x f		~0.20	~0.36	~0.64	~1.00	~1.44	~2.56

$$ap \times f \leq \frac{1}{2} \times 0.8CW \times 0.1CW = 0.04CW^2$$

2. When using KGM-T toolholder (Deep grooving type) - use 90% of KGM conditions

3. When using KGMM / KGMS / KFMS-8 Toolholder

	Recommended cutting conditions	
ap (max.) (mm)	50% or under of edge width	ap ≤ 0.5CW
f (max.) (mm/rev)	4% or under of edge width	f ≤ 0.04CW

(ap) x (f) should be as follows. (50% or under of KGM)

Load(mm ²)	Edge width(mm)	2.0~2.5	3.0	4.0	5.0	6.0	8.0
ap x f		~0.10	~0.18	~0.32	~0.50	~0.72	~1.28

$$ap \times f \leq 0.02CW^2$$

4. When using KIGM toolholder

	Recommended cutting conditions	
ap (max.) (mm)	70% or under of Edge Width	ap ≤ 0.7CW
f (max.) (mm/rev)	8% or under of Edge Width	f ≤ 0.08CW

(ap) x (f) should be as follows: 70% or under of KGM



Load(mm ²)	Edge width(mm)	3.0	4.0	5.0
ap x f		~0.25	~0.44	~0.70

$$ap \times f \leq 0.04CW^2$$

GMG / GMM / GMGA 8030 - face grooving

Workpiece material	Recommended insert grades (Vc: m/min)						Face grooving	Turning	Remarks
	Cermet	CVD coated carbide	PVD coated carbide			Carbide	Edge width (mm)	Edge width (mm)	
	TN90	CR9025	PR915	PR930	PR905	KW10	8.0	8.0	
							f (mm/rev)	f (mm/rev)	
Carbon steel	☆ 100~220	☆ 80~160	☆ 80~160	★ 80~160	-	-	0.1~0.2	0.1~0.25	Coolant
Alloy steel	☆ 80~160	☆ 70~160	☆ 70~160	★ 70~160	-	-	0.1~0.2	0.1~0.25	
Stainless steel	☆ 70~140	☆ 60~130	★ 60~130	☆ 60~130	-	-	0.1~0.2	0.1~0.25	
Cast iron	-	-	-	-	★ 80~180	☆ 70~130	0.1~0.3	0.1~0.35	
Aluminum alloys	-	-	-	-	-	★ 200~300	0.08~0.25	0.08~0.30	
Brass	-	-	-	-	-	★ 100~150	0.08~0.25	0.08~0.30	

★:1st recommendation ☆:2nd recommendation

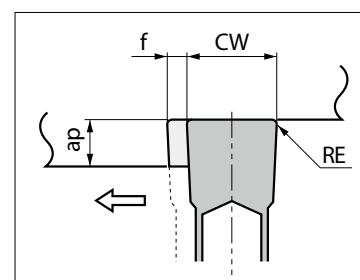

Recommended cutting conditions

EZG

Workpiece material	Insert grades (Vc: m/min)		EZGR030030-...S	EZG%L040040-... EZG%L050050-... EZG%L040040-...S EZG%L050050-...S	EZG%L060060-... EZG%L070070-... EZG%L080070-... EZG%L060060-...S EZG%L070070-...S EZG%L080070-...S	Remarks
	MEGACOAT	Carbide				
	PR1225	GW05				
Carbon steel / Alloy steel	★ 30~100	-	~0.02	~0.03	~0.05	Coolant
Stainless steel	★ 30~80	-	~0.01	~0.02	~0.03	
Non-ferrous metals	-	★ ~300	-	~0.05	~0.08	

★:1st recommendation

VNG

Workpiece material	Recommended insert grades (Vc: m/min)			VNG04 VNG05	VNG06 VNG07	Remarks
	MEGACOAT	PVD Coated carbide	Carbide			
	PR1225	PR930	KW10			
Carbon steel / Alloy steel	★ 30~100	☆ 30~100		~0.03	~0.05	Coolant
Stainless steel	★ 30~80	☆ 30~80		~0.02	~0.03	
Non-ferrous metals			★ ~300	~0.05	~0.08	

★:1st recommendation ☆:2nd recommendation

SIGC

Workpiece material	Recommended insert grades (Vc: m/min)		(1) f for grooving (mm/rev)			Remarks
	MEGACOAT NANO PLUS	MEGACOAT NANO	(2) f for turning (mm/rev)			
	PR1725	PR1535	(3) ap for turning (mm)			
			GC08 ⁹ /L...	GC10 ⁹ /L, GC12 ⁹ /L 100 ~ 200...	GC10 ⁹ /L, GC12 ⁹ /L 250 ~ 300...	
Carbon steel	★ 50~80	☆ 50~80	(1) 0.01~0.03	(1) 0.02~0.04	(1) 0.02~0.04	Coolant
			(2) 0.01~0.03	(2) 0.02~0.04	(2) 0.02~0.04	
			(3) Max. 0.05	(3) Max. 0.05	(3) Max. 0.1	
Alloy steel	★ 50~80	☆ 50~80	(1) 0.01~0.03	(1) 0.02~0.04	(1) 0.02~0.04	
			(2) 0.01~0.03	(2) 0.02~0.04	(2) 0.02~0.04	
			(3) Max. 0.05	(3) Max. 0.05	(3) Max. 0.1	
Stainless steel	☆ 50~80	★ 50~80	(1) 0.01~0.03	(1) 0.01~0.03	(1) 0.01~0.03	
			(2) 0.01~0.03	(2) 0.01~0.03	(2) 0.01~0.03	
			(3) Max. 0.05	(3) Max. 0.05	(3) Max. 0.1	

★:1st recommendation ☆:2nd recommendation

Ground chipbreaker: GE^{R/L}...A(R), GE^{R/L}...B(R)

Workpiece material	Recommended insert grades (Vc: m/min)				(1) f for grooving (mm/rev)						Remarks
	MEGACOAT	MEGACOAT NANO EX	Carbide	Cermet	(2) f for turning (mm/rev)						
	PR1225	PR2025	KW10	TN6020	(3) ap for turning (mm)						
					GE% _L	100~200-010A 100~200-100AR	GE% _L	100~200-010B 100~200-100BR	GE% _L	250~300-020B	
Carbon steel	☆ 50~80	★ 50~80	-	☆ 50~80	(1) 0.01~0.03		(1) 0.02~0.04		(1) 0.02~0.04		Coolant
					(2) 0.01~0.03		(2) 0.02~0.04		(2) 0.02~0.04		
					(3) Max. 0.05		(3) Max. 0.05		(3) Max. 0.1		
Alloy steel	☆ 50~80	★ 50~80	-	☆ 50~80	(1) 0.01~0.03		(1) 0.02~0.04		(1) 0.02~0.04		
					(2) 0.01~0.03		(2) 0.02~0.04		(2) 0.02~0.04		
					(3) Max. 0.05		(3) Max. 0.05		(3) Max. 0.1		
Stainless steel	☆ 50~80	★ 50~80	-	-	(1) 0.01~0.03		(1) 0.01~0.03		(1) 0.01~0.03		
					(2) 0.01~0.03		(2) 0.01~0.03		(2) 0.01~0.03		
					(3) Max. 0.05		(3) Max. 0.05		(3) Max. 0.1		
Cast iron	-	-	★ 50~80	-	(1) 0.01~0.03		(1) 0.02~0.04		(1) 0.02~0.04		
					(2) 0.01~0.03		(2) 0.02~0.04		(2) 0.02~0.04		
					(3) Max. 0.05		(3) Max. 0.05		(3) Max. 0.1		
Aluminum	-	-	★ 50~100	-	(1) 0.01~0.03		(1) 0.02~0.04		(1) 0.02~0.04		
					(2) 0.01~0.03		(2) 0.02~0.04		(2) 0.02~0.04		
					(3) Max. 0.1		(3) Max. 0.1		(3) Max. 0.2		
Brass	-	-	★ 50~100	-	(1) 0.01~0.03		(1) 0.02~0.04		(1) 0.02~0.04		
					(2) 0.01~0.03		(2) 0.02~0.04		(2) 0.02~0.04		
					(3) Max. 0.1		(3) Max. 0.1		(3) Max. 0.2		

* Use PVD coated grade or carbide for turning with edge width 1mm. (GE^{R/L} 100-005A / 100-005B) ★:1st recommendation ☆:2nd recommendationGround chipbreaker: GE^{R/L}...C(R), GE^{R/L}...D(R), GE^{R/L}...E

Workpiece material	Recommended insert grades (Vc: m/min)				(1) f for grooving (mm/rev)							Remarks
	MEGACOAT	MEGACOAT NANO EX	Carbide	Cermet	(2) f for turning (mm/rev)							
					(3) ap for turning (mm)							
					GE ^{R/L} 100~200-010C 200-100CR	GE ^{R/L} 250~350-020C 250~300-150CR						
PR1225	PR2025	GW15	TN6020	GE ^{R/L} 100~145-010D	GE ^{R/L} 150~195-010D	GE ^{R/L} 200~280-020D 200-100DR		GE ^{R/L} 300~400-020D 300-150DR				
				GE ^{R/L} 100-010E	GE ^{R/L} 150~195-010E	GE ^{R/L} 200~225-010E 230-020E	GE ^{R/L} 250~330-020E		GE ^{R/L} 350~430-020E	GE ^{R/L} 450~500-020E		
Carbon steel	☆ 60~140	★ 60~140	-	☆ 120~180	(1) 0.03~0.08	(1) 0.03~0.08	(1) 0.04~0.09	(1) 0.04~0.09	(1) 0.05~0.12	(1) 0.05~0.12	(1) 0.05~0.12	
					(2) 0.03~0.08	(2) 0.03~0.08	(2) 0.04~0.09	(2) 0.04~0.09	(2) 0.05~0.1	(2) 0.05~0.1	(2) 0.05~0.1	
					(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	
Alloy steel	☆ 60~120	★ 60~120	-	☆ 100~160	(1) 0.03~0.07	(1) 0.03~0.07	(1) 0.04~0.08	(1) 0.04~0.08	(1) 0.05~0.1	(1) 0.05~0.1	(1) 0.05~0.1	
					(2) 0.03~0.1	(2) 0.03~0.1	(2) 0.04~0.08	(2) 0.04~0.08	(2) 0.05~0.1	(2) 0.05~0.1	(2) 0.05~0.1	
					(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	
Stainless steel	☆ 60~110	★ 60~110	-	☆ 70~130	(1) 0.03~0.07	(1) 0.03~0.07	(1) 0.04~0.08	(1) 0.04~0.08	(1) 0.05~0.1	(1) 0.05~0.1	(1) 0.05~0.1	
					(2) 0.03~0.1	(2) 0.03~0.1	(2) 0.04~0.08	(2) 0.04~0.08	(2) 0.05~0.1	(2) 0.05~0.1	(2) 0.05~0.1	
					(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	
Cast iron	-	-	★ 60~100	-	(1) 0.03~0.08	(1) 0.03~0.08	(1) 0.04~0.09	(1) 0.04~0.09	(1) 0.05~0.12	(1) 0.05~0.12	(1) 0.05~0.12	
					(2) 0.03~0.08	(2) 0.03~0.08	(2) 0.04~0.09	(2) 0.04~0.09	(2) 0.05~0.1	(2) 0.05~0.1	(2) 0.05~0.1	
					(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.3	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	
Aluminum	-	-	★ 150~300	-	(1) 0.05~0.12	(1) 0.05~0.12	(1) 0.05~0.15	(1) 0.05~0.15	(1) 0.08~0.15	(1) 0.08~0.15	(1) 0.08~0.15	
					(2) 0.05~0.12	(2) 0.05~0.12	(2) 0.05~0.15	(2) 0.05~0.15	(2) 0.08~0.15	(2) 0.08~0.15	(2) 0.08~0.15	
					(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.8	(3) Max. 0.8	(3) Max. 0.8	
Brass	-	-	★ 100~250	-	(1) 0.05~0.12	(1) 0.05~0.12	(1) 0.05~0.15	(1) 0.05~0.15	(1) 0.08~0.15	(1) 0.08~0.15	(1) 0.08~0.15	
					(2) 0.05~0.12	(2) 0.05~0.12	(2) 0.05~0.15	(2) 0.05~0.15	(2) 0.08~0.15	(2) 0.08~0.15	(2) 0.08~0.15	
					(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.5	(3) Max. 0.8	(3) Max. 0.8	(3) Max. 0.8	

* Use PVD coated grade or carbide for turning with edge width 1mm. (GE^{R/L} 100-010C / 100-010D / 100-010E) ★:1st recommendation ☆:2nd recommendation

Molded chipbreakers: GER...CM, GER...DM, GER...EM

Workpiece material	Recommended insert grades (Vc: m/min)				(1) f for grooving (mm/rev)						Remarks
	MEGACOAT	MEGACOAT NANO EX	Carbide	Cermet	(2) f for turning (mm/rev)						
	PR1225	PR2025	GW15	TN6020	(3) ap for turning (mm)						
					GER 150~200-010CM	GER 250~350-020CM					
					GER 150~200-010DM		GER 230~250-020DM	GER 300~400-020DM			
					GER 150~200-010EM			GER 250~300-020EM	GER 350~400-020EM	GER 450~500-020EM	
Carbon steel	☆ 60~160	★ 60~160	-	-	(1) 0.03~0.1	(1) 0.03~0.12	(1) 0.04~0.12	(1) 0.05~0.12	(1) 0.05~0.12	Coolant	
					(2) 0.03~0.1	(2) 0.03~0.1	(2) 0.04~0.1	(2) 0.05~0.1	(2) 0.05~0.1		
					(3) Max.1.0	(3) Max.1.5	(3) Max.1.5	(3) Max.1.5	(3) Max.1.5		(3) Max.1.5
Alloy steel	☆ 60~140	★ 60~140	-	-	(1) 0.03~0.1	(1) 0.03~0.1	(1) 0.04~0.12	(1) 0.05~0.12	(1) 0.05~0.12		(1) 0.05~0.12
					(2) 0.03~0.1	(2) 0.03~0.1	(2) 0.04~0.1	(2) 0.05~0.1	(2) 0.05~0.1		(2) 0.05~0.1
					(3) Max.1.0	(3) Max.1.5	(3) Max.1.5	(3) Max.1.5	(3) Max.1.5		(3) Max.1.5
Stainless steel	☆ 60~110	★ 60~110	-	-	(1) 0.03~0.08	(1) 0.03~0.08	(1) 0.04~0.08	(1) 0.05~0.1	(1) 0.05~0.1		(1) 0.05~0.1
					(2) 0.03~0.1	(2) 0.03~0.1	(2) 0.04~0.1	(2) 0.05~0.1	(2) 0.05~0.1		(2) 0.05~0.1
					(3) Max.1.0	(3) Max.1.5	(3) Max.1.5	(3) Max.1.5	(3) Max.1.5		(3) Max.1.5

★: 1st recommendation ☆: 2nd recommendation



Grooving

GV Inserts - ground chipbreaker

Workpiece material	Recommended insert grades (Vc: m/min)						f (mm/rev) = (1) grooving, (2) turning ap (mm) = (3) turning						Remarks
	Cermet			MEGA COAT	PVD coated carbide	Carbide	GV [®] /L 100~300...SS 100~300...S	GV [®] /L 145~185...B	GV [®] /L 200~280...B	GV [®] /L 300~400...B			
	TN90	TC60N	TC60M	PR1225	PR930	KW10	GV [®] /L 100~340...A 200~300...AR		GV [®] /L 200~100BR	GV [®] /L 300~150BR	GV [®] /L 280~300...C	GV [®] /L 340~400...C	GV [®] /L 430~500...C
Carbon steel	☆ 120~180	☆ 120~180	☆ 80~120	★ 80~160	☆ 80~140	-	(1) 0.03~0.08 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.03~0.08 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5
Alloy steel	☆ 100~160	☆ 100~160	☆ 80~100	★ 80~140	☆ 80~120	-	(1) 0.03~0.07 (2) 0.03~0.1 (3) Max. 0.3	(1) 0.03~0.07 (2) 0.03~0.1 (3) Max. 0.3	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5
Stainless steel	☆ 70~130	-	☆ 60~100	★ 60~130	☆ 60~110	-	(1) 0.03~0.07 (2) 0.03~0.1 (3) Max. 0.3	(1) 0.03~0.07 (2) 0.03~0.1 (3) Max. 0.3	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5
Cast iron	-	-	-	-	-	★ 60~100	(1) 0.03~0.08 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.03~0.08 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5
Aluminum alloys	-	-	-	-	-	★ 150~300	(1) 0.05~0.12 (2) 0.05~0.12 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.12 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8
Brass	-	-	-	-	-	★ 100~250	(1) 0.05~0.12 (2) 0.05~0.12 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.12 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8

* Use MEGACOAT, PVD coated carbide or carbide for turning with edge width 1mm (GV[®]/L 100SS / 100S / 100A)

★:1st recommendation ☆:2nd recommendation

GVF Inserts - ground chipbreaker

Workpiece material	Recommended insert grades (Vc: m/min)						f (mm/rev) = (1) grooving, (2) turning ap (mm) = (3) turning					Remarks
	Cermet			MEGACOAT	PVD coated carbide	Carbide	GVF [®] /L 200~340...A	GVF [®] /L 250~350...B	GVF [®] /L 400~490...B	GVF [®] /L 350~450...C	GVF [®] /L 500~600...C	
	TN90	TC60N	TC60M	PR1225	PR930	KW10	GVF [®] /L 200~100AR ~300~150AR	GVF [®] /L 300~150BR	GVF [®] /L 400~200BR			
Carbon steel	☆ 150~220	☆ 150~220	☆ 100~150	★ 80~200	☆ 80~180	-	(1) 0.03~0.08 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.8	Coolant
Alloy steel	☆ 130~200	☆ 130~200	☆ 80~130	★ 80~180	☆ 80~160	-	(1) 0.03~0.07 (2) 0.03~0.1 (3) Max. 0.3	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.09 (2) 0.05~0.09 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.8	
Stainless steel	☆ 70~150	-	☆ 60~100	★ 80~150	☆ 60~130	-	(1) 0.03~0.07 (2) 0.03~0.1 (3) Max. 0.3	(1) 0.04~0.08 (2) 0.04~0.08 (3) Max. 0.3	(1) 0.05~0.09 (2) 0.05~0.09 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.8	
Cast iron	-	-	-	-	-	★ 60~100	(1) 0.03~0.08 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.1 (3) Max. 0.8	
Aluminum alloys	-	-	-	-	-	★ 150~400	(1) 0.05~0.12 (2) 0.05~0.12 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	
Brass	-	-	-	-	-	★ 150~300	(1) 0.05~0.12 (2) 0.05~0.12 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	(1) 0.08~0.15 (2) 0.08~0.15 (3) Max. 0.8	

Apply a sufficient amount of coolant

The ap should be under 0.5 mm if a good surface finish is required

★:1st recommendation ☆:2nd recommendation

FTK

Workpiece material	Recommended insert grades (Vc: m/min)				Edge width (mm)		Remarks
	Cermet	CVD coated carbide	PVD coated carbide	Carbide	4.0	5.0	
	TN90	CR9025	PR930	KW10	f (mm/rev)		
Carbon steel	☆ 120~200	★ 80~180	☆ 60~130	-	0.05~0.15	0.05~0.15	Coolant
Alloy steel	☆ 100~160	★ 70~150	☆ 60~130	-	0.05~0.15	0.05~0.15	
Stainless steel	☆ 80~150	☆ 60~140	☆ 50~120	-	0.05~0.15	0.05~0.15	
Cast iron	-	-	-	★ 50~100	0.10~0.30	0.10~0.30	
Aluminum alloys	-	-	-	★ 200~450	0.05~0.25	0.05~0.25	
Brass	-	-	-	★ 100~200	0.05~0.25	0.05~0.25	

★:1st recommendation ☆:2nd recommendation

GMN inserts (CBN / PCD)

Workpiece material	Recommended insert grades (Vc: m/min)		f (mm/rev) = (1) grooving, (2) turning ap (mm) = (3) turning				Remarks
	CBN	PCD	GMN2	GMN3	GMN4, GMN5	GMN6	
	KBNS10, KBNS25	KPD001 (KPD010)					
Aluminum alloys	-	★ 150~2,000	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.8	(1) 0.08~0.18 (2) 0.08~0.18 (3) Max. 0.8	(1) 0.10~0.20 (2) 0.10~0.20 (3) Max. 0.8	Coolant
Brass	-	★ 200~800	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.8	(1) 0.08~0.18 (2) 0.08~0.18 (3) Max. 0.8	(1) 0.10~0.20 (2) 0.10~0.20 (3) Max. 0.8	
Cast iron	★ 150~400	-	(1) 0.04~0.09 (2) 0.04~0.09 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.5	(1) 0.05~0.12 (2) 0.05~0.12 (3) Max. 0.5	(1) 0.05~0.15 (2) 0.05~0.15 (3) Max. 0.8	
Hard materials	★ 80~120	-	(1) 0.02~0.05 (2) 0.01~0.03 (3) Max. 0.1	(1) 0.03~0.07 (2) 0.01~0.05 (3) Max. 0.2	(1) 0.03~0.08 (2) 0.03~0.08 (3) Max. 0.3	(1) 0.05~0.1 (2) 0.05~0.1 (3) Max. 0.4	



★:1st recommendation

KGDI - recommended cutting conditions (Vc)


Workpiece material	Chipbreaker	Recommended insert grades (Vc: m/min)						Remarks
		Cermet		MEGACOAT NANO	MEGACOAT		Carbide	
		TN620	TN90	PR1535	PR1225	PR1215	GW15	
Carbon steel	GMI CM GS	☆ 100~220	☆ 100~220	☆ 80~150	★ 80~200	☆ 100~200	-	Coolant
Alloy steel		☆ 80~200	☆ 80~200	☆ 70~150	★ 70~180	☆ 80~180	-	
Stainless steel		☆ 70~180	☆ 70~180	★ 60~150	☆ 60~150	☆ 60~150	-	
Cast iron		-	-	-	-	★ 100~200	-	
Aluminum alloys		-	-	-	-	-	★ 200~500	
Brass		-	-	-	-	-	★ 100~200	

★ : 1st recommendation ☆ : 2nd recommendation

KGDI - recommended cutting conditions (f and ap)

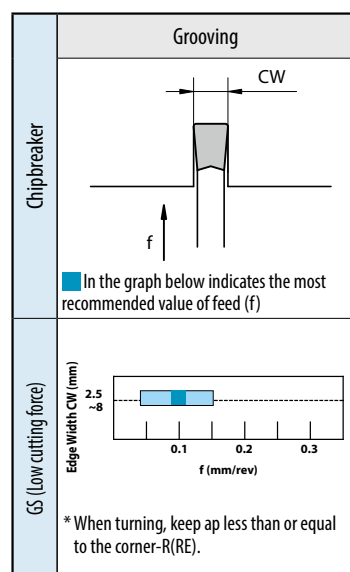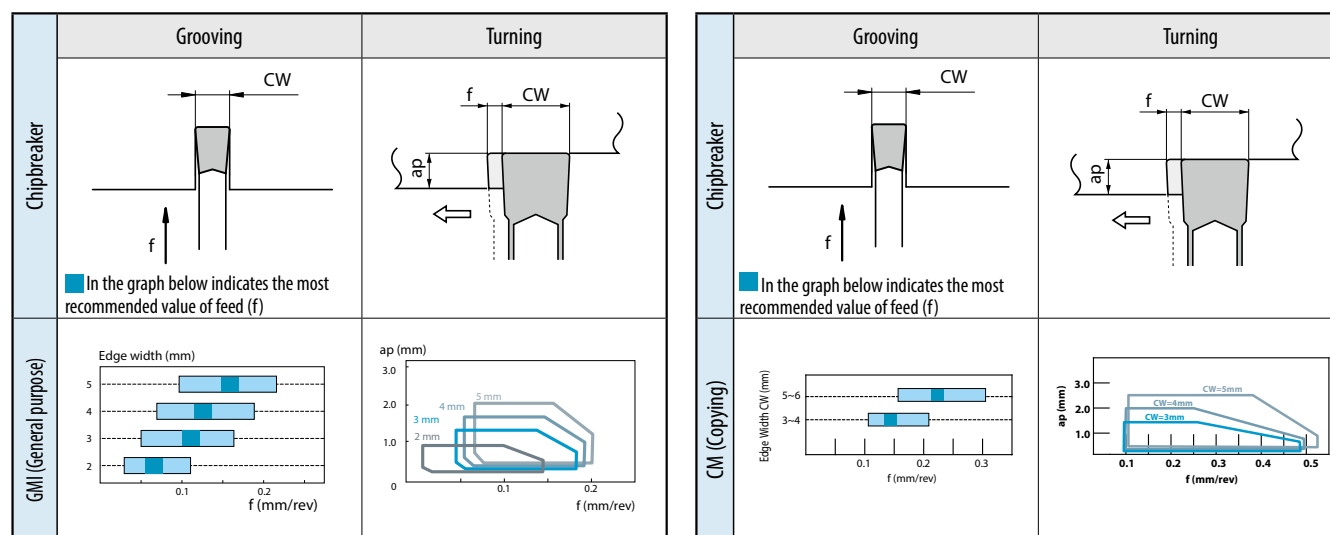

Additional processing of toolholder tip when CM chipbreaker is installed



* By slightly chamfering the holder tip of about 0.5 mm, the cutting diameter can be minimized.

Guide for External Grooving


Point (I) (Turning after Grooving)

- 1) Grooving Depth 0.5mm or over : For roughing (Refer to Fig. 1)

Before turning, pull the tool back about 0.1mm after grooving, instead of turning subsequent to grooving.
(Failure to pull the tool back before traverse machining will result in an unbalanced load applied on only one side of the cutting edge.)


- 2) Grooving Depth 0.5mm or under : For finishing (Refer to Fig. 2)

Turning subsequent to grooving is possible because shallow groove depths relate a small load on the cutting edge. (Retention time is not necessary.)



Before turning, pull the tool back about 0.1mm after grooving.
(Grooving Depth 0.5mm or over at roughing)

Fig. 1



Turning subsequent to grooving
(Grooving Depth 0.5mm or under at finishing)

Fig. 2

Point (II)

- 1) When widening the groove width (Refer to Fig. 3), apply the "Step Turning."

- 2) The widened groove and side walls should be finished last.

(For better chip control, ap 0.5mm or over is recommended.)

Note) If the workpiece is not supported at the center, reduce the feed rate when grooving towards center.




Fig. 3

G

Grooving

Guide for Face Grooving

<Toolholder Selection>

- (1) Choose the best tool depending on the groove width.

External dia. of the groove listed in the catalog indicates the available range
(between DAXN and DAXX) for the initial grooving on the unprocessed workpiece (Ref. to Fig. 1).



- (2) Confirm Grooving Depth (CD)



- (3) It is recommended to install the toolholder in the reverse position. (Fig. 2)

(This will provide smooth chip flow and chip clearance.)

<Guide for turning>

Turning direction should be from the outer diameter to the inner diameter as shown in Fig. 3

This improves chip evacuation.




Fig. 3

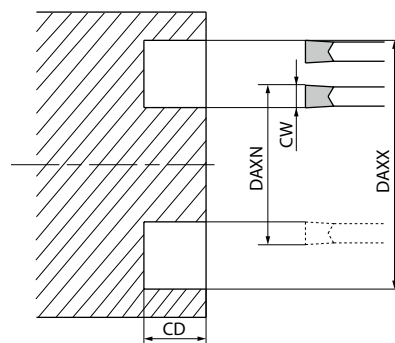


Fig. 1

Toolholder	Right-hand	Toolholder	Left-hand
Insert	(Neutral)	Insert	(Neutral)

Fig. 2 Toolholder's hand and rotation


Guide for Face Grooving (Continued)

Point (I) (Turning after Grooving)

1) Grooving Depth 0.5mm or over : For roughing (Refer to Fig. 4)

Before turning, pull the tool back about 0.1mm after grooving, instead of turning subsequent to grooving.

(Failure to pull the tool back before traverse machining will result in an unbalanced load applied on only one side of the cutting edge.)



Before turning, pull the tool back about 0.1mm after grooving.


(Grooving Depth 0.5mm or over at roughing)

Fig. 4

2) Grooving Depth 0.5mm or under : For finishing (Refer to Fig. 5)

Turning subsequent to grooving is possible because shallow groove depths relate a small load on the cutting edge.

(Retention time is not necessary.)



Turning subsequent to grooving

(Grooving Depth 0.5mm or under at finishing)

Fig. 5

Point (II)

1) When widening the groove width. (Ref. to Fig. 6)

Apply the "Step Turning".

2) The widened groove and side walls should be finished last.

(For better chip control, ap 0.5mm or over is recommended.)




Fig. 6

Trouble shooting

Trouble	Countermeasures
Whitish trace remains at the groove bottom.	(1) Increase the cutting speed for finishing process only. (This can handle most of the cases.) If the method is not successful, try (2) as follows. (2) Check the insert edge's parallelness. (Adjustment: Apply the insert edge to the workpiece face and adjust the toolholder within the angle of $\pm 5^\circ$. (Fig. 7)) Fig. 7
Chips are entangled.	(1) Install the toolholder in the reverse position. Adjust the coolant flow to the cutting edge. (2) When widening the groove, do not machine one deep groove. Instead, repeat shallow grooving and turning.
Insert cracks when turning.	Reverse the facing direction.
Groove is not straight.	Check the edge's parallelness. Decrease the feed rate.



